



ROCKETLINX ES7510-XT

Industrial PoE Plus Switch

Industrial Managed PoE Switch

8 - 10/100BASE-TX PoE Plus Ports
2 - Gigabit RJ45/SFP Combo Ports



User Guide



Copyright Notice

Comtrol and RocketLinux are trademarks of Comtrol Corporation.

Microsoft and Windows are trademarks of Microsoft Corporation.

FireFox is a trademark of Mozilla Foundation.

PuTTY is a copyright of Simon Tatham.

Other product names mentioned herein may be trademarks and/or registered trademarks of their respective owners.

Fifth Edition, September 26, 2016

Copyright © 2012-2016. Comtrol Corporation.

All Rights Reserved.

Comtrol Corporation makes no representations or warranties with regard to the contents of this document or to the suitability of the Comtrol product for any particular purpose. Specifications are subject to change without notice. Some software or features may not be available at the time of publication. Contact your reseller for current product information.

Federal Communications Commission (FCC) Statement

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user is required to correct the interference at his expense.

The user is cautioned that changes and modifications made to the equipment without approval of the manufacturer could void the user's authority to operate this equipment.

Table of Contents

Introduction	7
Hardware Installation	9
Connect the Power and Ground	9
Connect the Digital Inputs and Relay Outputs	10
Connect the Surge/Lightening Protection	11
Mount the ES7810-XT	11
Connect the Ethernet Ports	13
Connect SFP Transceivers (Combo Ports 9-10)	14
LED Descriptions	14
Reset Button	15
Using PortVision DX	17
PortVision DX Overview	17
PortVision DX Requirements	18
Installing PortVision DX	18
Configuring the Network Settings	20
Checking the Firmware Version	23
Uploading the Latest Firmware or Bootloader	24
Uploading Firmware to Multiple ES7810-XT Switches	25
Adding a New Device in PortVision DX	26
Using Configuration Files	27
Saving a Configuration File	27
Loading a Configuration File	27
Using the LED Tracker	28
Customizing PortVision DX	29
Accessing RocketLinux Documentation from PortVision DX	30
How to Download Documentation	30
How to Open Previously Downloaded Documents	31
Configuration Using the Web User Interface	33
Configuration Overview	33
Web User Interface	34
Secure Web User Interface.....	35
Feature Overview	37
Basic Settings	46
Switch Setting.....	46
Admin Password	48
IP Configuration	49
Time Setting.....	51
DHCP Server Configuration	54
DHCP Leased Entries	56
DHCP Option82 Relay Information.....	57
Backup and Restore.....	59
Backup the Configuration - Local File Method	60
Restore the Configuration - Local Method	60
Backup the Configuration - TFTP Server Method	61
Restore the Configuration - TFTP Server Method	62

Firmware Upgrade	63
Upgrading Firmware (Local File).....	63
Upgrading Firmware (TFTP Server).....	64
Load Default.....	64
System Reboot.....	65
Port Configuration	66
Port Control.....	66
Port Status	68
Rate Control	70
Port Trunking	71
Aggregation Setting	72
Aggregation Information.....	73
Power over Ethernet.....	74
PoE Control.....	74
PoE Scheduling.....	77
PoE Status.....	78
Network Redundancy	79
STP Configuration	80
STP Port Configuration.....	81
STP Information	82
MSTP Configuration.....	84
MSTP Port Configuration	86
MSTP Information.....	87
Redundant Ring.....	89
Redundant Ring Information.....	91
Loop Protection	92
VLAN.....	93
VLAN Configuration.....	94
VLAN Port Configuration	96
VLAN Information.....	98
Private VLAN.....	99
PVLAN Configuration	99
PVLAN Port Configuration.....	100
PVLAN Information	101
GVRP Configuration.....	102
Traffic Prioritization	103
QoS Setting	103
CoS-Queue Mapping.....	105
DSCP-Queue Mapping	106
Multicast Filtering	107
IGMP Query	108
IGMP Snooping.....	109
GMRP Configuration.....	110
SNMP	111
SNMP Configuration	111
SNMP V3 Profile.....	112
SNMP Traps.....	113
Security	114
Port Security	114
IP Security.....	115
802.1X Configuration.....	116
802.1X Port Configuration	118
802.1X Port Information.....	120

Warning	121
Fault Relay.....	121
Event Selection	123
SysLog Configuration	124
SMTP Configuration.....	125
Monitor and Diag	126
LLDP Configuration	126
MAC Address Table.....	128
Port Statistics	130
Port Mirroring.....	131
Event Logs.....	132
Ping Utility.....	132
Device Front Panel	133
Save to Flash	134
Logout	134
Configuration Using the Command Line Interface (CLI)	135
Overview	135
Using the Serial Console	136
Using a Telnet/SSH Console	139
Command Line Interface Introduction	140
User EXEC Mode.....	141
Accessing the Options for a Command	141
Privileged EXEC Mode.....	143
Global Configuration Mode	144
(Port) Interface Configuration	145
(VLAN) Interface Configuration	146
Command Mode Summary	146
Basic Settings (CLI)	148
Port Configuration (CLI)	154
Power over Ethernet (CLI)	157
Network Redundancy (CLI)	162
VLAN (CLI)	171
Private VLAN (CLI)	174
Traffic Prioritization (CLI)	178
Multicast Filtering (CLI)	181
SNMP (CLI)	185
Security (CLI)	186
Warnings (CLI)	188
Monitor and Diag (CLI)	191
Saving to Flash (CLI)	194
Logging Out (CLI)	194
Service (CLI)	194
Complete CLI List	195
User EXEC Mode	195
Privileged EXEC Mode	196
Global Configuration Mode	201
Port Interface Configuration Mode	206
VLAN Interface Configuration Mode	208

ModBus TCP /IP Support.....209
 Overview 209
 Modbus TCP Function Codes..... 210
 Error Checking 210
 Exception Response 211
 Modbus TCP Register Table..... 211
 CLI Commands for Modbus TCP..... 219

Technical Support 221
 Control Private MIB..... 221
 Control Support 221

Introduction

The ES7510-XT is an industrial ten port managed PoE Plus switch that provides:

- Eight 10/100BASE-TX PoE Plus ports that are IEEE 802.3af (15.4W) and IEEE 802.3at (30W) compliant with a forced powering feature to support non-standard Power Devices (PDs)
- Two Gigabit (10/100/1000BASE-TX) Combo RJ45/SFP ports

The ES7510-XT meets the high power and advanced management needs of critical PoE applications such as real-time IP video surveillance and wireless communication utilizing Wimax and IEEE 802.11 a/b/g/n access points. Featuring a rugged design for harsh environments, web user interface, Command Line Interface (CLI), SNMP management options, power scheduling, and eight fully compliant IEEE 802.3at PoE injector ports, the ES7510-XT is easily configured to deliver up to 30W for even the most power intensive devices such as IP cameras utilizing heaters and pan/tilt/zoom controls.

In addition to functioning as a PoE power source, the ES7510-XT includes features to enhance device control, ensuring that power consumption does not exceed parameters that you define. This includes power budget control functions to limit power output on devices not reporting correct consumption rates and device priority options to guarantee power to critical devices while avoiding power supply overloads.

The ES7510-XT is equipped with full Layer 2+ management capabilities to provide the most flexible network configuration and control. Features like Link Aggregation Control Protocol (LACP) allow grouping of multiple ports to enhance bandwidth and provide load balancing while port-based VLAN with tunneling, QoS, IGMP Snooping, and Rate Control features enable optimum control over network environments. In addition to the full array of management capabilities, the ES7510-XT also supports security features that protect the network and guarantee secure, reliable data transmission. Fault relay and email notification of event alarms, DHCP supporting IP and MAC binding, IEEE 802.1x Access Control, SSH, and many other controls are included to make secure administration and management a simple task.

The ES7510-XT provides features needed for network control and security in an industrial network environment.

Detailed specifications for the ES7510-XT are available on the Control [web site](#).

You can refer to [Feature Overview](#) on Page 37 for web user interface features.

Hardware Installation

You can use the following subsections to install the RocketLinx ES7510-XT.

- [Connect the Power and Ground](#)
- [Connect the Digital Inputs and Relay Outputs](#) on Page 10
- [Mount the ES7510-XT](#) on Page 11
- [Connect the Ethernet Ports](#) on Page 13
- [Connect SFP Transceivers \(Combo Ports 9-10\)](#) on Page 14
- [LED Descriptions](#) on Page 14
- [Reset Button](#) on Page 15

Connect the Power and Ground

Use the following procedure to connect the power and ground.




This switch is intended to be installed in a RESTRICTED ACCESS LOCATION ONLY.

You can use the following procedure to connect power and the ground to the ES7510-XT.

1. Connect the DC power inputs.
 - a. Insert positive and negative wires (12-24AWG) into the PWR+ and PWR- contacts.

Note: Power should be disconnected from the power supply before connecting it to the switch. Otherwise, your screw driver blade can inadvertently short your terminal connections to the grounded enclosure. Tighten the wire-clamp screws to prevent the wires from coming loose.

 - PWR1 and PWR2 support power redundancy and reverse polarity protection.
 - Accepts a positive or negative power source but PWR1 and PWR2 must apply to the same mode.
 - If both power inputs are connected, the ES7510-XT is powered from the highest connected voltage.
 - The ES7510-XT can emit an alarm if PWR1 or PWR2 are no longer receiving power. See the [Warning](#) discussion on [Page 121](#) to configure an alarm.
2. Connect a ground wire between the chassis and earth ground using 12-24AWG wire to ensure that the ES7510-XT is not damaged by noise or electrical shock.
 - a. Loosen the ground screw on the bottom of the ES7510-XT.
 - b. Insert the ground wire.
 - c. Tighten the ground screw after the ground wire is connected.

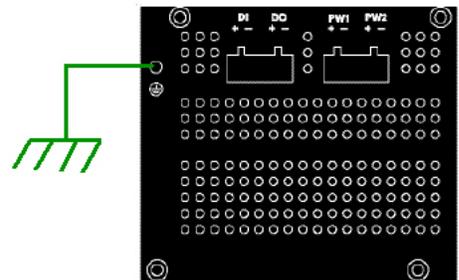


Connect the Digital Inputs and Relay Outputs

The ES7510-XT provides one digital input and one digital output (dry relay output) on the terminal block connectors on the bottom of the unit. The fault conditions can be configured in the web user interface or Command Line Interface (CLI) and include:

- Power
- Port link
- Ring
- Ping
- Ping reset
- Dry output
- DI

You can configure events using one of the ES7510-XT user interfaces ([Fault Relay](#) on Page 121) or the Command Line Interface ([Global Configuration Mode](#) on Page 144).

The Digital Input pin can be pulled high or low so that the connected equipment can actively drive these pins. The web user interface allows you to read and set the value to the connected device. The power input voltage of logic low is 0 to 10VDC and logic high is 11 to 30VDC. Do not apply a higher voltage than the specification; it may cause internal circuit damage or a cause an incorrect DI action.

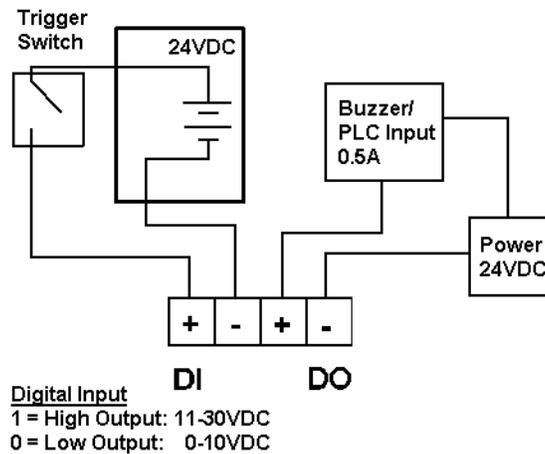

Digital output relay contacts are energized (open) for normal operation and close for fault conditions. The digital output relay contacts support up to 0.5A at 24VDC. Do not apply voltage and current higher than the specifications.


1. Insert the positive and negative wires (12-24 AWG) into V+ and V-.
2. Tighten the wire-clamp screws to prevent the wires from coming loose.

Connect the Surge/Lightening Protection

Connect a ground wire between the earth ground (surge) screw and earth ground to provide enhanced surge and lightning immunity.


1. Loosen the earth ground screw located on the back of the unit next to the compliance label.
2. Insert the ground wire (12-24AQWG).
3. Tighten the surge screw after the ground wire is inserted.

Make sure that you remove the surge ground screw before insulation/Hi-pot testing.

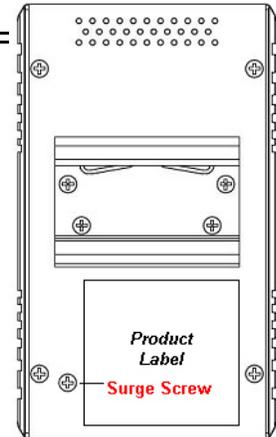

Mount the ES7510-XT

You can use the following procedure to mount the ES7510-XT on a DIN rail or on the wall. The DIN rail clip is already attached to the ES7510-XT. If the DIN rail clip is not screwed onto the ES7510-XT, follow the instructions and the figure below to attach DIN rail clip to the ES7510-XT.

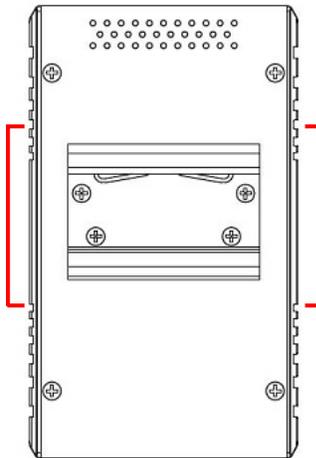

DIN Rail Mounting

1. If necessary, use the screws to attach DIN rail clip to the rear panel of the ES7510-XT. (To remove DIN rail clip, reverse Step 1.)
2. Insert the upper end of DIN rail clip into the back of DIN rail track from its upper side.
3. Lightly push the bottom of DIN rail clip into the track.
4. Verify that the DIN rail clip is tightly attached on the track.
5. To remove the ES7510-XT from the track, reverse the steps above.



Follow the steps below to install the ES7510-XT with the wall mounting plate:

1. To remove the DIN rail clip from the ES7510-XT, loosen the screws from the DIN rail clip.
2. Place the wall mounting plate on the rear panel of the ES7510-XT.
3. Use the screws to attach the wall mounting plate to the ES7510-XT.
4. Use the hook holes at the corners of the wall mounting plate to hang the ES7510-XT onto the wall.
5. To remove the wall mounting plate, reverse the steps above.


Connect the Ethernet Ports

You can use the following information to connect standard Ethernet cables between the ES7510-XT Ethernet ports and the network nodes.

- Ports 1-8 are Fast Ethernet (10/100BASE-TX) PoE ports that are IEEE 802.3af (PoE) and IEEE 802.3at (PoE Plus) compliant.
- Ports 9-10 are RJ45/SFP Combo Gigabit ports that support 10/100/1000BASE-TX, 100BASE-FX, and 1000BASE-X with digital diagnostic monitoring (DDM).

See [Connect SFP Transceivers \(Combo Ports 9-10\)](#) on Page 14 for information about SFP installation.

All of the Ethernet ports automatically detect the signal from the connected devices to negotiate the link speed and duplex mode (half- or full-duplex). Auto MDI/MDIX allows you to connect another switch, hub, or workstation without changing straight-through or crossover cables. Crossover cables cross-connect the transmit lines at each end to the received lines at the opposite end.

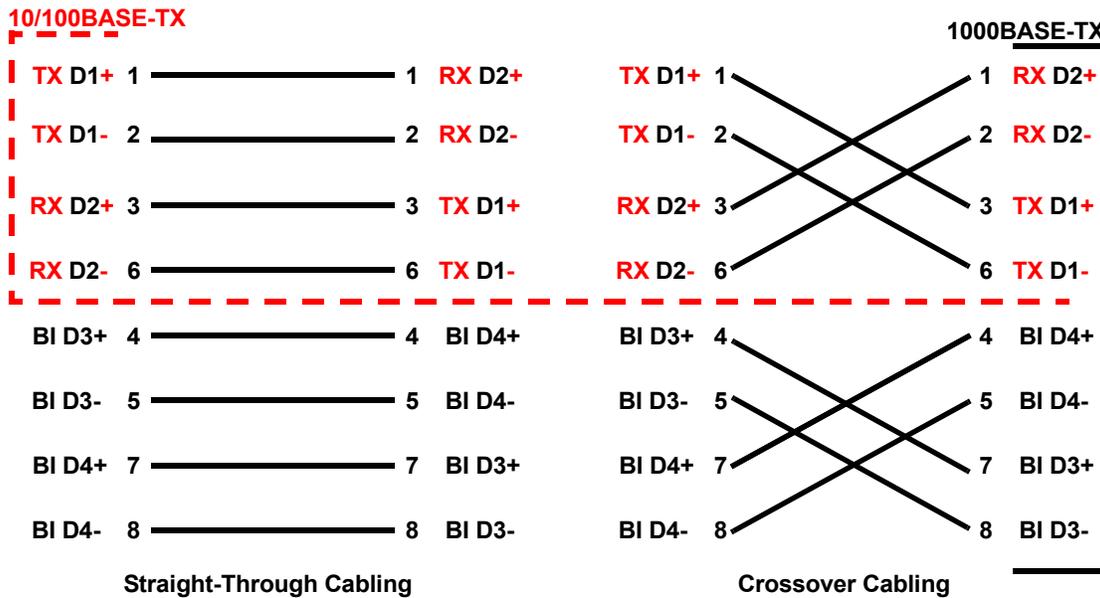

Connect one side of an Ethernet cable into any switch port and connect the other side to your attached device. The **LNK/ACT** LED is lit when the cable is correctly connected. Always make sure that the cables between the switches and attached devices (for example, switch, hub, or workstation) are less than 100 meters (328 feet) and meet these requirements.

- **10BASE-T:** Category 3 or higher cable
- **100BASE-TX:** Category 5 or higher cable
- **1000BASE-TX:** Category 5 or higher cable

Connect SFP Transceivers (Combo Ports 9-10)

The ES7510-XT provides two SFP ports combined with RJ45 Gigabit Ethernet ports (Ports 9-10). The SFP ports accept standard mini GBIC DDM SFP transceivers that support 100BASE-FX/1000BASE-X.


To ensure system reliability, Comtrol recommends using [Comtrol certified SFP Transceivers](#).

1. Plug the SFP transceiver into the SFP fiber transceiver.
2. Connect the transmit channel to the receive channel at each end.
3. Check the direction/angle of the fiber transceiver and the fiber cable.

Note: This is a Class 1 Laser/LED product. Do not stare at the Laser/LED Beam.

The SFP port does not function until the fiber cable is linked to another active device. The SFP and corresponding RJ45 ports work in an exclusive mode. Traffic sent or received through the SFP module has priority thus no traffic is sent or received over the corresponding RJ45 connection. To use the RJ45 connection, remove the corresponding SFP.

Multi-Mode cables should not exceed 2KM and Single-Mode cables should not exceed 30km.

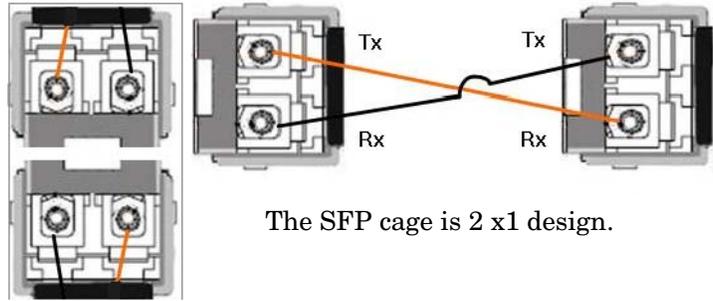

LED Descriptions

This subsection provides information about the ES7510-XT LEDs. You can also refer to [Device Front Panel](#) on Page 133 for information about using the web user interface to remotely view LED information.

LED	LED Lit	LED Blinking	LED Off
Sys	System is ready	Firmware is uploading	System not ready
Power 1/2	Power is on	Not applicable	Power is not applied
RS (Ring Status)	Green: Ring is normal Amber: Abnormal Ring	Green: Ring with the wrong port Amber: The device's ring port failed	Switch working in slave mode
DO (Red)	Relay is active and contacts have been shorted	Not applicable	DO not activated
DI (Green)	High digital signal is detected	Not applicable	DI not activated
LINK/ACT	Port is linked	Port active	Port link down or port not connected
1000M	Port is linked at 1000Mbps	Not applicable	Not applicable
PoE	PoE is applying power	Detecting	PoE disabled: power output over current, a cable short, or PoE is disabled for that port

Reset Button

The ES7510-XT has a reset button that you can use to reboot the ES7510-XT or reset the configuration to the factory default.

Reset Button	Description
Depress 5 Seconds	This reboots the ES7510-XT without changing the configuration.
Depress > 10 Seconds	This loads the factory default configuration values into the ES7510-XT including the IP address.

The **Reset** button is located on the front panel of the ES7510-XT below the **Console** port.

Using PortVision DX

There are several ways to configure network information. Control Technical Support recommends connecting the ES7510-XT to a PC or laptop running [Windows](#) and installing *PortVision DX* for initial configuration.

This section shows how to use PortVision DX for initial network configuration and discusses how to:

- Install PortVision DX ([Page 18](#))
- Configure the network address ([Page 20](#))
- Check the firmware and bootloader version on the ES7510-XT to verify that the latest versions are loaded ([Page 23](#)) before configuration
- Download the latest version firmware and bootloader and upload it to the ES7510-XT ([Page 24](#))
- Perform other PortVision DX tasks, such as:
 - Uploading firmware to multiple ES7510-XT switches ([Page 25](#))
 - Adding a new RocketLinx (managed or unmanaged) or a third party device to PortVision DX to maintain device information on your network ([Page 26](#))
 - Using configuration files for use in configuring multiple installations with the same features ([Page 27](#))
 - Using the LED Tracker ([Page 28](#))
- Organize how PortVision DX displays your Control Ethernet attached products ([Page 27](#))
- Access the latest documentation for your Control Ethernet attached product

Optionally, you can use the web user interface or the CLI to perform these tasks on the ES7510-XT using these subsections:

- [IP Configuration](#) on Page 49
- [Firmware Upgrade](#) on Page 63
- [Basic Settings \(CLI\)](#) on Page 148

PortVision DX Overview

PortVision DX automatically detects Control Ethernet attached products physically attached to the local network segment so that you can configure the network address, upload firmware, and manage the following products:

- RocketLinx (managed) switches
- DeviceMaster family
 - DeviceMaster PRO
 - DeviceMaster RTS
 - DeviceMaster Serial Hub
 - DeviceMaster 500
- DeviceMaster UP
- DeviceMaster LT
- IO-Link Master family

In addition to identifying Control Ethernet attached products, you can use PortVision DX to display any third-party switch and hardware that may be connected directly to those devices. All non-Control products and unmanaged RocketLinx switches are treated as non-intelligent devices and have limited feature support. For example, you cannot configure or update firmware on a third-party switch.

PortVision DX Requirements

Use PortVision DX to identify, configure, update, and manage the ES7510-XT on Windows XP SP3 through Windows 10 operating systems (at the time of publication).


PortVision DX requires that you connect the Comtrol Ethernet attached product to the same network segment as the Windows host system if you want to be able to scan and locate it automatically during the configuration process.

Installing PortVision DX

During initial configuration, PortVision DX automatically detects and identifies ES7510-XT switches, if they are in the same network segment.


You can download the latest version of PortVision DX from: http://downloads.comtrol.com/rocketlinx/portvision_dx.

1. Execute the **PortVision_DX[version].msi** file.


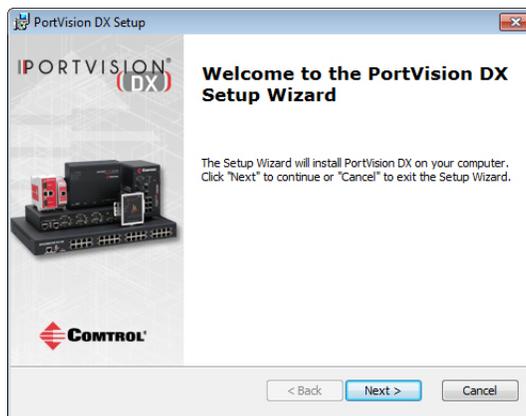


Note: Depending on your operating system, you may need to respond to a Security Warning to permit access.


2. Click **Next** on the *Welcome* screen.
3. Click **I accept the terms in the License Agreement** and **Next**.
4. Click **Next** or optionally, browse to a different location and then click **Next**.

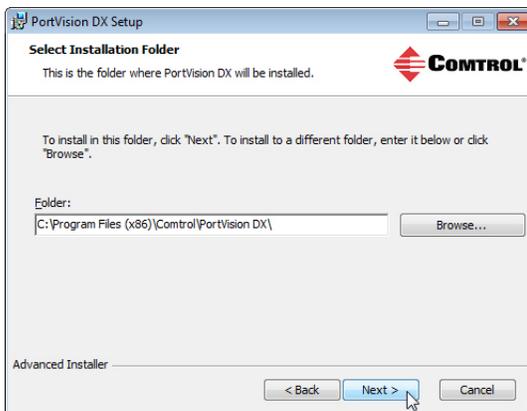

5. Click **Next** to configure the shortcuts.
6. Click **Install**.

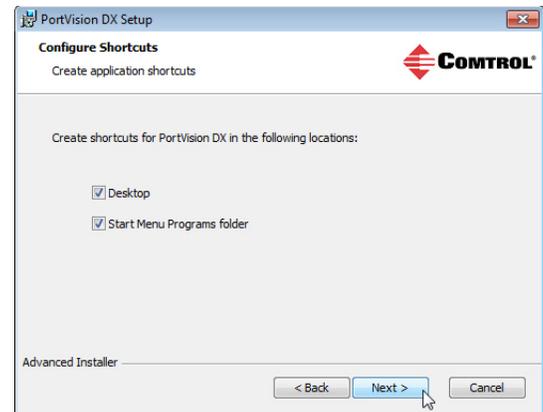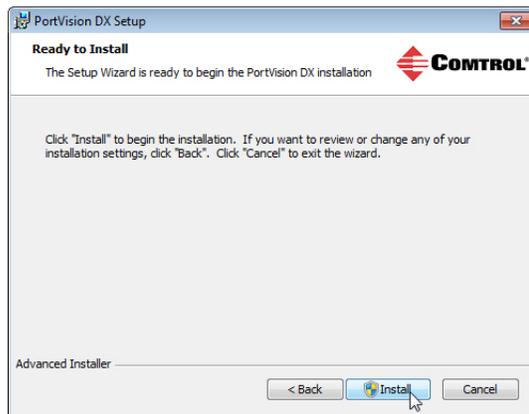

7. Depending on the operating system, you may need to click **Yes** to the *Do you want to allow the following program to install software on this computer?* query.
8. Click **Launch PortVision DX** and **Finish** in the last installation screen.
9. Depending on the operating system, you may need to click **Yes** to the *Do you want to allow the following program to make changes to this computer?* query.
10. Go the next subsection to use PortVision DX to program the network information.

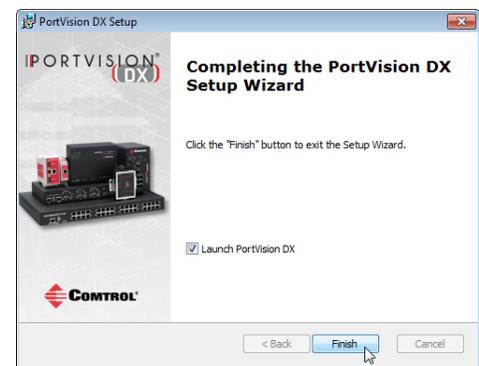

Configuring the Network Settings

The ES7510-XT has the following default values when shipped from the factory:

- IP address: 192.168.250.250
- Subnet mask: 255.255.255.0
- Gateway address: 192.168.250.1

Use the following procedure to change the default network settings on the ES7510-XT for your network.


1. If necessary, start PortVision DX using the **PortVision DX** desktop shortcut or from the **Start** button, click **All Programs > Control > PortVision DX > PortVision DX**.

Note: Depending on your operating system, you may need to click **Yes** to the *Do you want to allow the following program to make changes to this computer?* query.

2. Click the **Scan** button in the *Toolbar*.
3. Select the Control Ethernet attached products that you want to locate and then click **Scan**.

Note: If the Control Ethernet attached product is not on the local segment and it has been programmed with an IP address, it will be necessary to manually add the Control Ethernet attached product to PortVision DX.

4. Highlight the ES7510-XT for which you want to program network information and open the **Properties** screen using one of these methods.
 - Double-click the ES7510-XT in the *Device Tree* or *Device List* pane.
 - Highlight the ES7510-XT in the *Device Tree* or *Device List* pane and click the **Properties** button.
 - Right-click the ES7510-XT in the *Device Tree* or *Device List* pane and click **Properties** in the popup menu

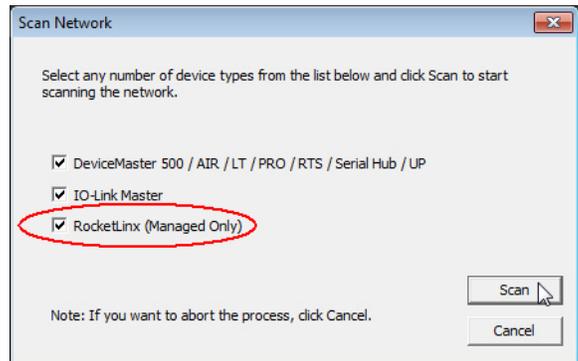


- Highlight the ES7510-XT, click the **Manage** menu and then **Properties**.

The screenshot shows the PortVision DX application window. The top menu bar includes File, Manage, View, Tools, and Help. The toolbar contains icons for Scan, Refresh All, Properties, Save, Load, Upload, Reboot, Webpage, Notes, Help, About, and Exit. The main area is divided into two panes:

- Device Tree Pane:** Located at the top right, it displays a folder icon with a plus sign and the text "Scan Results [88 / 88]". A red arrow points to this folder with the text: "The contents of this folder are displayed below in the Device List". Another red arrow points to the plus sign with the text: "You can expand the tree and also view the devices in the Device Tree pane." The text "Device Tree Pane" is written in red at the bottom of this pane.
- Device List Pane:** Located at the bottom right, it displays a table of devices. The table has columns for Device Name, Model, IP Address, MAC Address, Software Version, and Status. A context menu is open over the first row, "Device 3C:00:02", with the "Properties" option highlighted by a red circle. The text "Device List Pane" is written in red at the bottom of this pane.

Device Name	Model	IP Addr...	MAC Address	Software Version	Status
Device 3C:00:02	ES8508F-MM	192.168.0.164	00:0C:45:2C:00:02	1.3.2 (b1.6.1.5)	ON-LINE
Device 2D:00:08	ES7506	192.168.0.165	00:0C:45:2C:00:03	1.3.2 (b1.6.4.5)	ON-LINE
Device 32:00:00	ES7528	192.168.0.166	00:0C:45:2C:00:04	1.3.2 (b0.3.0.10)	ON-LINE
Device 35:00:09	ES8509-XT	192.168.0.167	00:0C:45:2C:00:05	1.3.1.5	ON-LINE
Device 2C:00:6C	ES8510	192.168.0.168	00:0C:45:2C:00:06	beta2 (b1.6.2.12)	ON-LINE
Device 34:00:08	ES7510	192.168.0.169	00:0C:45:2C:00:07	beta4 (b1.2.1.6)	ON-LINE
Device 36:00:02	ES9528-XT	192.168.0.170	00:0C:45:2C:00:08	beta1 (b1.1.0.4)	ON-LINE
Device 30:00:10	ES8510-XTE	192.168.0.171	00:0C:45:2C:00:09	beta2 (b1.6.2.12)	ON-LINE
Device 38:00:02	ES7510-XT	192.168.0.172	00:0C:45:2C:00:0A	beta7 (b1.4.1.6)	ON-LINE
Device 3A:00:0D	ES8508	192.168.0.173	00:0C:45:2C:00:0B	beta1 (b1.5.1.5)	ON-LINE
Device 2F:03:1D	ES8510-XT	192.168.0.174	00:0C:45:2C:00:0C	beta2 (b1.6.2.12)	ON-LINE
Device 1C:FF:5D	ES8510-XT	192.168.0.175	00:0C:45:2C:00:0D	beta1 (b1.5.1.5)	ON-LINE
Device 5A:00:0D	ES8510-XT	192.168.0.176	00:0C:45:2C:00:0E	beta1 (b1.5.1.5)	ON-LINE
Device 17:FF:FB	PRO-8P (DB9)	192.168.0.177	00:0C:45:2C:00:0F	et/IP 1.2.0	ON-LINE
Device 07:FF:FC	RTS-4P (DB9)	192.168.0.178	00:0C:45:2C:00:10	k 9.18	ON-LINE
Device 42:FF:F8	RTS-1P (5-30V)	192.168.0.179	00:0C:45:2C:00:11	Server 9.30	ON-LINE
Device 29:FF:F5	RTS-2P (2E)	192.168.0.180	00:0C:45:2C:00:12	Server 9.35	ON-LINE
Device 15:04:7A	UP-1P (5V)	192.168.0.181	00:0C:45:2C:00:13	k 9.34	ON-LINE
Device 07:42:84	UP-1P (5V)	192.168.0.182	00:0C:45:2C:00:14	et/IP 4.10	ON-LINE

- Optionally, rename the ES7510-XT in the **Device Name** field for a PortVision DX friendly name. The default name displays as *Device* and the last three sets of hex numbers from the MAC address.

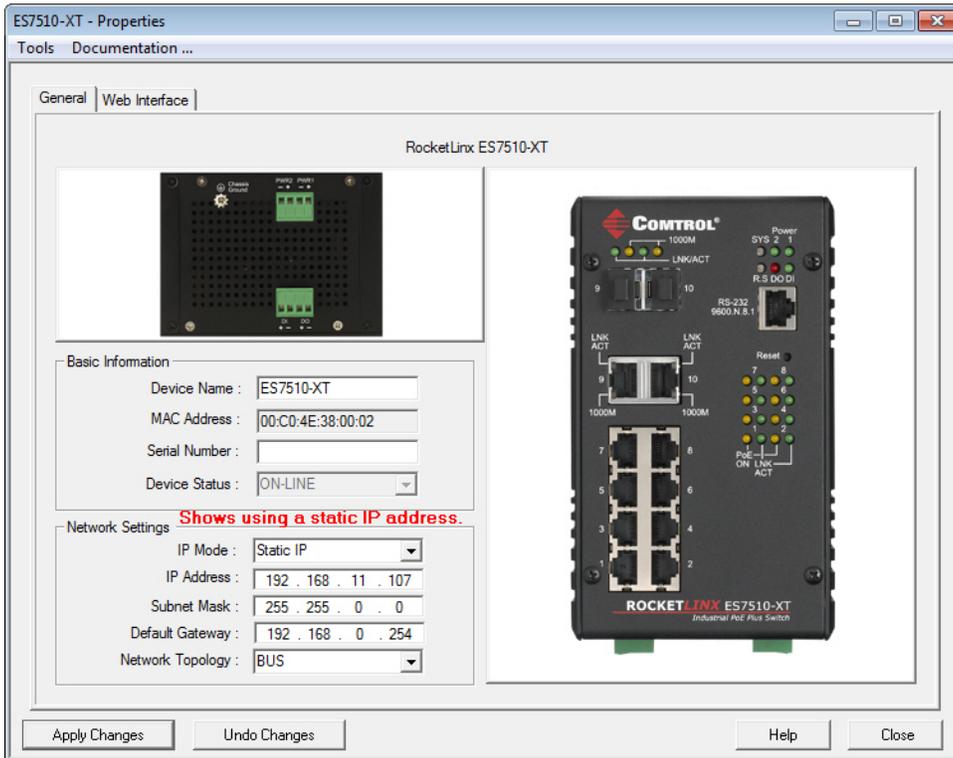

Note: The MAC address and Device Status fields are automatically populated and you cannot change these values.

- Optionally, enter the serial number, which is on a label on the ES7510-XT.
- Select **DHCP IP** or **Static IP** for the *IP Mode*.
 - If you select **DHCP IP**, go to [Step 8](#).
 - If you select **Static IP**:
 - Enter a unique **IP address** as required for your site.
 - Enter a valid **Subnet Mask** value for your network.
 - Enter a valid **Default Gateway** value for your network.

- Optionally, select the **Network Topology** type, which is an informational field.
- Click **Apply Changes** to update the network information on the ES7510-XT.

Note: If you are deploying multiple ES7510-XT switches that share common values, you can save the configuration file and load that configuration onto other ES7510-XT switches. See [Using Configuration Files](#) on Page 27 for more information.

- Click **Close** to exit the *Properties* window.
- You should verify that you have the latest firmware loaded on the ES7510-XT because a newer version typically includes feature enhancements and bug fixes. Refer to [Checking the Firmware Version](#) on Page 23 and if necessary, [Uploading the Latest Firmware or Bootloader](#) on Page 24.
- If you have the latest firmware, you can begin feature configuration, see one of these sections:
 - [Configuration Using the Web User Interface](#) on Page 33
 - [Configuration Using the Command Line Interface \(CLI\)](#) on Page 135
 - Right-click the ES7510-XT in the *Device List* pane and click **Webpage** in the popup menu.


Note: The default User Name and Password are both **admin**.

Checking the Firmware Version

Checking your web interface and bootloader versions is easy in PortVision DX.

Control recommends loading the latest firmware and bootloader so that you have all of the latest feature enhancements and bug fixes.

1. If the ES7510-XT is not displayed in PortVision DX, click the **Scan** button.
2. Select the Control Ethernet attached product type and click the **Scan** button.
3. Locate the ES7510-XT in the *Device List* pane. Under *Software Version*: The first number reflects the firmware version and the second number displays the bootloader version.

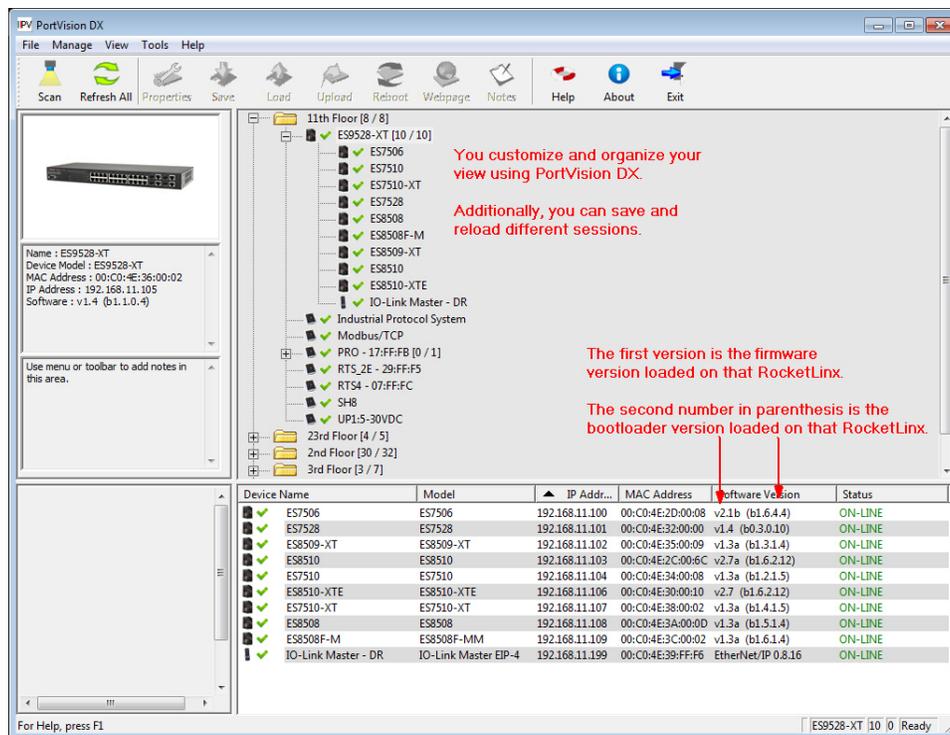


4. Check the [Control download](#) site for the latest firmware and bootloader. Simply, click your product type and click the **Software** link and check the latest version against the version on the ES7510-XT.

Use the next subsection for procedures to upload the firmware (web interface) and bootloader.


Uploading the Latest Firmware or Bootloader

You can use the following procedure to upload the latest firmware or bootloader.

1. If you have not done so, download the latest firmware and bootloader using the previous subsection.
2. Right-click the ES7510-XT in the *Device List* pane that you want to update, click **Advanced --> Upload firmware**.

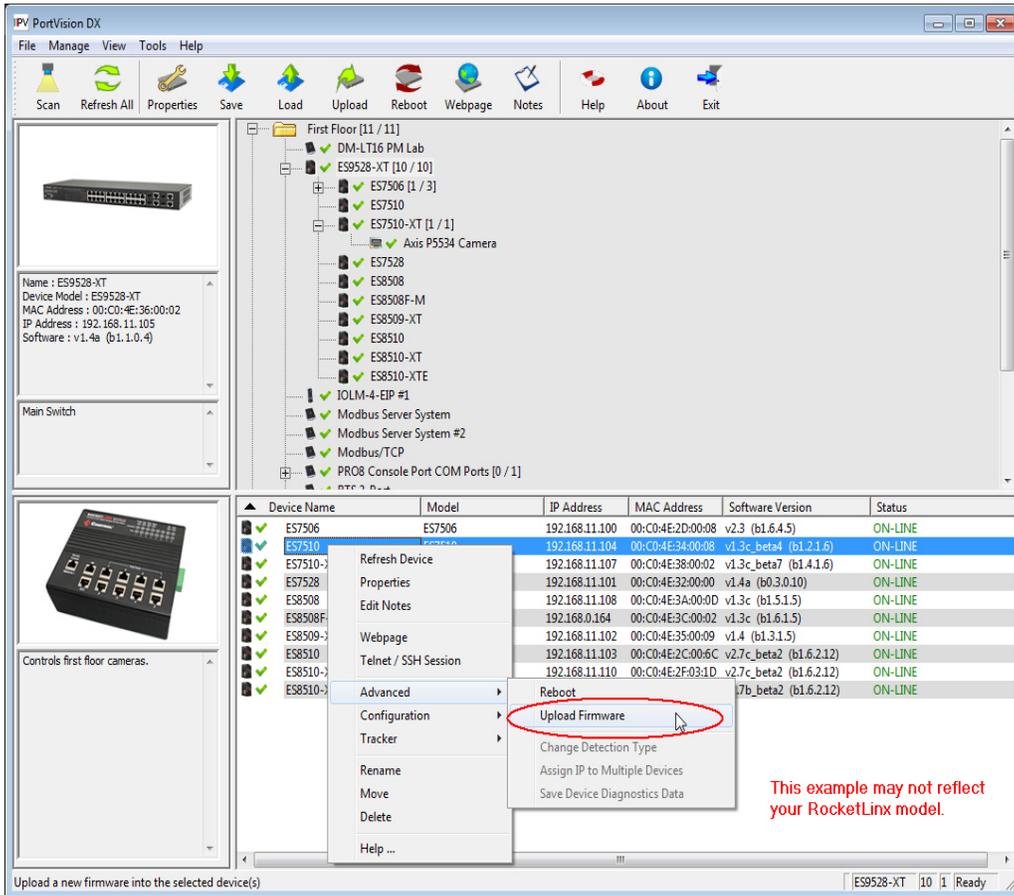

3. Navigate to the location of the firmware files, select the appropriate file, and then click **Open**.
4. Click **Yes** to the *Upload Firmware* message.
5. Click **Ok** to the message notifying you that you should wait to use the ES7510-XT when the status returns to ON-LINE.
6. Right-click the ES7510-XT in the *Device List* pane and click **Refresh**. Optionally, you can click the **Refresh** button in the *Toolbar* and that refreshes all devices in PortVision DX.
7. Verify that the version change is reflected in under the *Software Version*.

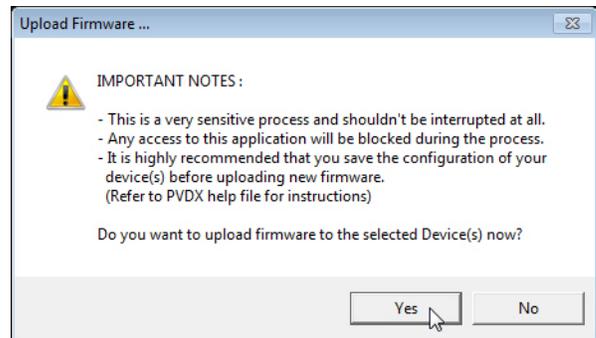


Uploading Firmware to Multiple ES7510-XT Switches

You can use this procedure if your ES7510-XT is connected to the host PC, laptop, or if the ES7510-XT resides on the local network segment.

Note: Technical support does not advise uploading bootloader to multiple ES7510-XT switches. Remember that uploading firmware reboots the ES7510-XT, which depending on your network connections may cause firmware uploading to fail on another ES7510-XT.

1. If the ES7510-XT is not displayed in PortVision DX, click the **Scan** button.
2. Select the Control Ethernet attached product type and click the **Scan** button.
3. Shift-click the multiple ES7510-XT switches on the **Main** screen that you want to update and right-click and then click **Advanced > Upload Firmware**.

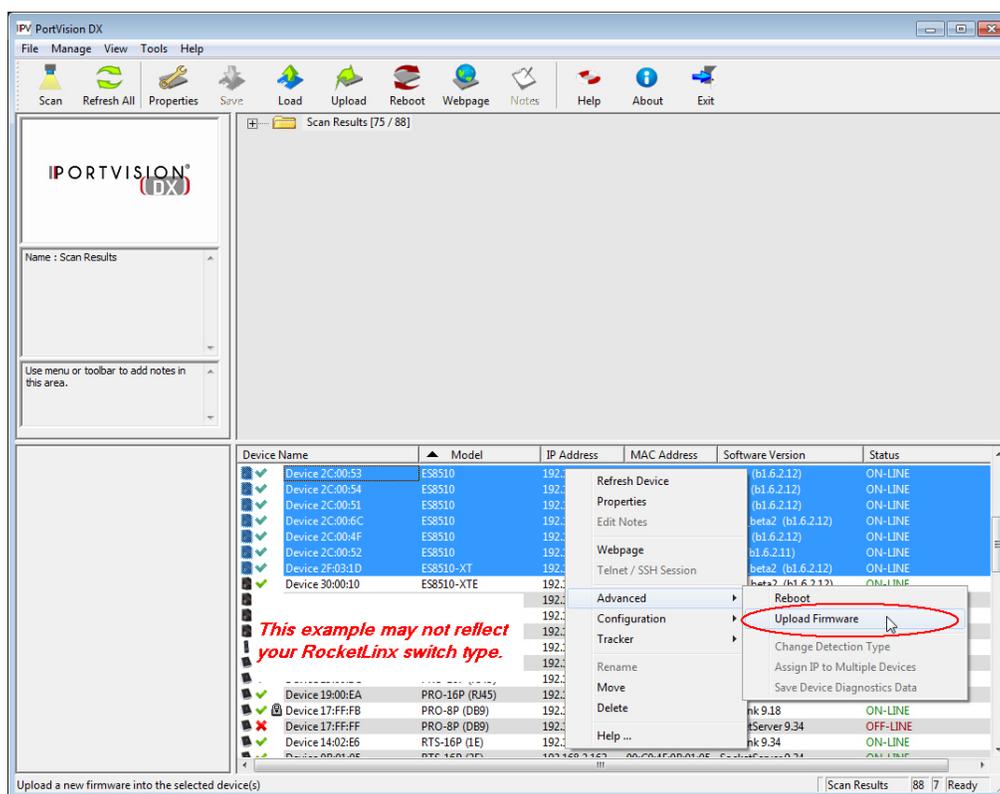

4. Browse, click the firmware (.bin) file, **Open** (Please locate the new firmware), and then click **Yes** (Upload Firmware).

It may take a few minutes for the firmware to upload onto all of the ES7510-XT switches. The ES7510-XT reboots itself during the upload process.

5. Click **Ok** to the advisory message about waiting to use the device until the status reads **ON-LINE**.

In the next polling cycle, PortVision DX updates the *Device List* pane and displays the new firmware version.


Adding a New Device in PortVision DX

You can add a new ES7510-XT manually, if you do not want to scan the network to locate it or you want to pre-configure an ES7510-XT before connecting it to the network. Optionally, you can also add unmanaged devices or RocketLinux switches to maintain information about devices on the network.

See the PortVision DX help system for additional information about adding unmanaged RocketLinux switches or third party devices or switches.

Use the following procedure to add a remote ES7510-XT to PortVision DX.

1. Access the *New Device* window using one of these methods:
 - Click **Add New > Device** in the *Manage* menu.
 - Right-click a folder or a RocketLinux switch in the *Device Tree* pane and click **Add New > Device**.

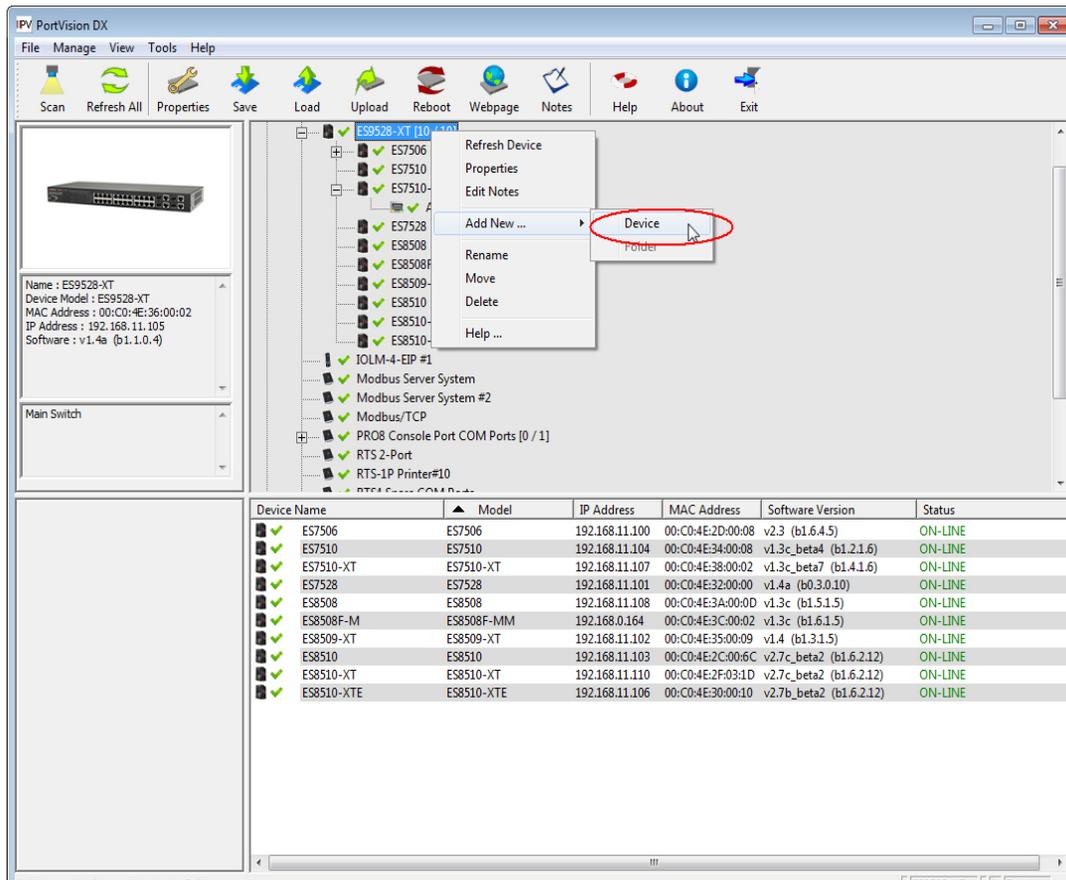

2. Select the appropriate RocketLinux in the **Device Type** drop list.
3. Select the appropriate model in the **Device Model** drop list.
4. Enter a friendly device name in the **Device Name** list box.
5. Optionally, enter the serial number in the **Serial Number** list box.

6. Enter the IP Address for the ES7510-XT. It is not necessary to enter the Subnet Mask and Default Gateway
7. Click **Ok** to close the *Add New Device* window. It may take a few moments to save the ES7510-XT.
8. If necessary, click **Refresh** for the new RocketLinX to display in the *Device Tree* or *Device List* panes. The RocketLinX shows **OFF-LINE** if it is not connected to the local network or if an incorrect IP address was entered.

Using Configuration Files

If you are deploying multiple ES7510-XT switches that share common firmware values, you can save the configuration file (.dc) from the *Main* screen in PortVision DX and load that configuration onto other ES7510-XT switches.

Saving a Configuration File

Use this procedure to save a configuration file.

1. Highlight the ES7510-XT in the *Device List* pane and use one of the following methods:
 - Click the **Save** button.
 - Right-click and then click **Configuration > Save**.
2. Browse to the location you want to save the file, enter a file name, and click **Save**.
3. Click **Ok** to close the *Save Configuration Completed* message.

Loading a Configuration File

Use the following procedure to load a previously saved a ES7510-XT configuration file. Load a configuration file and apply it to a selected ES7510-XT switch or switches from the *Device List* pane.

Use this procedure to load a configuration file using the *Device List* pane to one or more ES7510-XT switches.


1. Highlight the device or devices in the *Device List* pane and use one of the following methods:
 - Click the **Load** button
 - Right-click and then click **Configuration > Load**
2. Click **Yes** to the warning that it will take 25 seconds per device and it may also reboot the devices.
3. Browse to the location of the configuration file, click the file name (.dc) and then **Open**.
4. Close the *Load Configuration* popup message.

Using the LED Tracker

RocketLinX managed switches support the LED Tracker feature, which allows you to toggle on/off the LEDs on a specific device so that you can locate the physical unit.

Use this procedure to toggle the LED Tracker feature on RocketLinX switches.

1. Right-click the ES7510-XT in the *Device List* pane, click **Tracker**, and then click **ON**.
The ES7510-XT SYS LED will flash for five seconds.

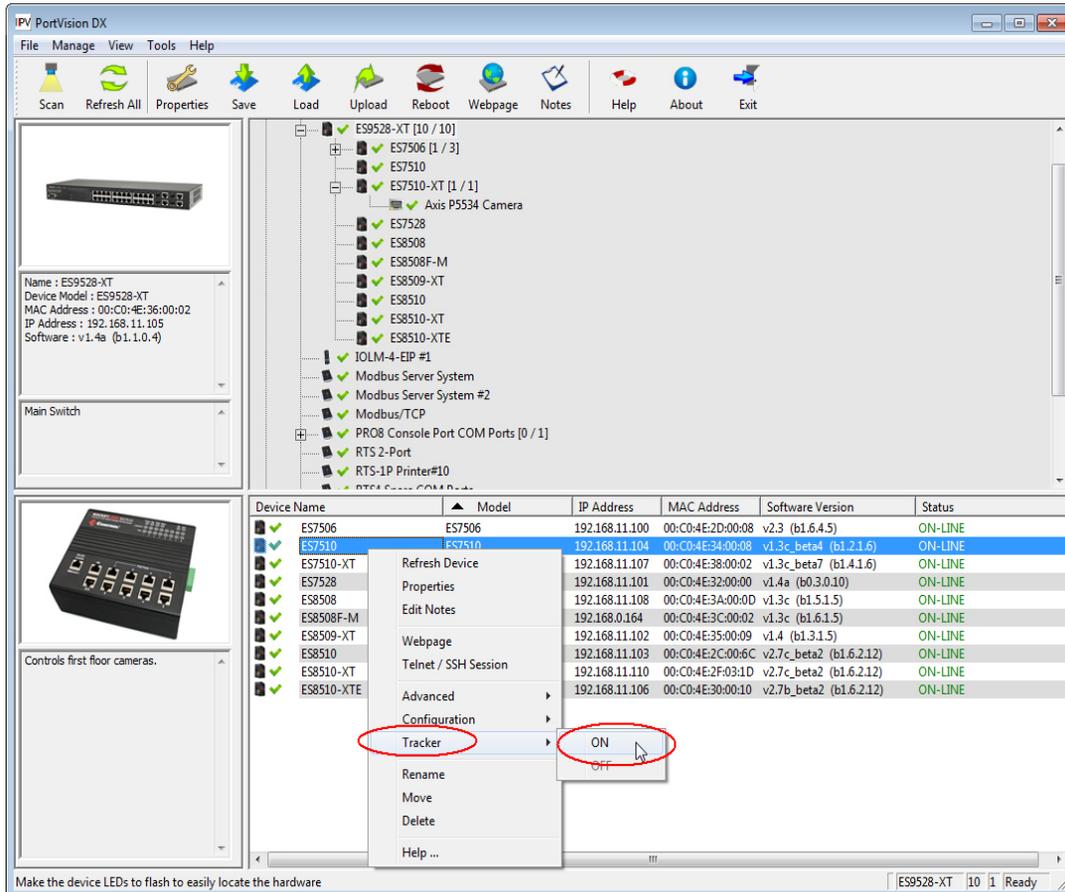


2. If necessary, you may need to click **Tracker** and **ON** several times to catch the flashing **SYS LED**.

Customizing PortVision DX

You can customize how PortVision DX displays the devices. You can even create sessions tailored for specific audiences. You can also add shortcuts to other applications using **Tools > Applications > Customize** feature.

The following illustrates how you can customize your view.

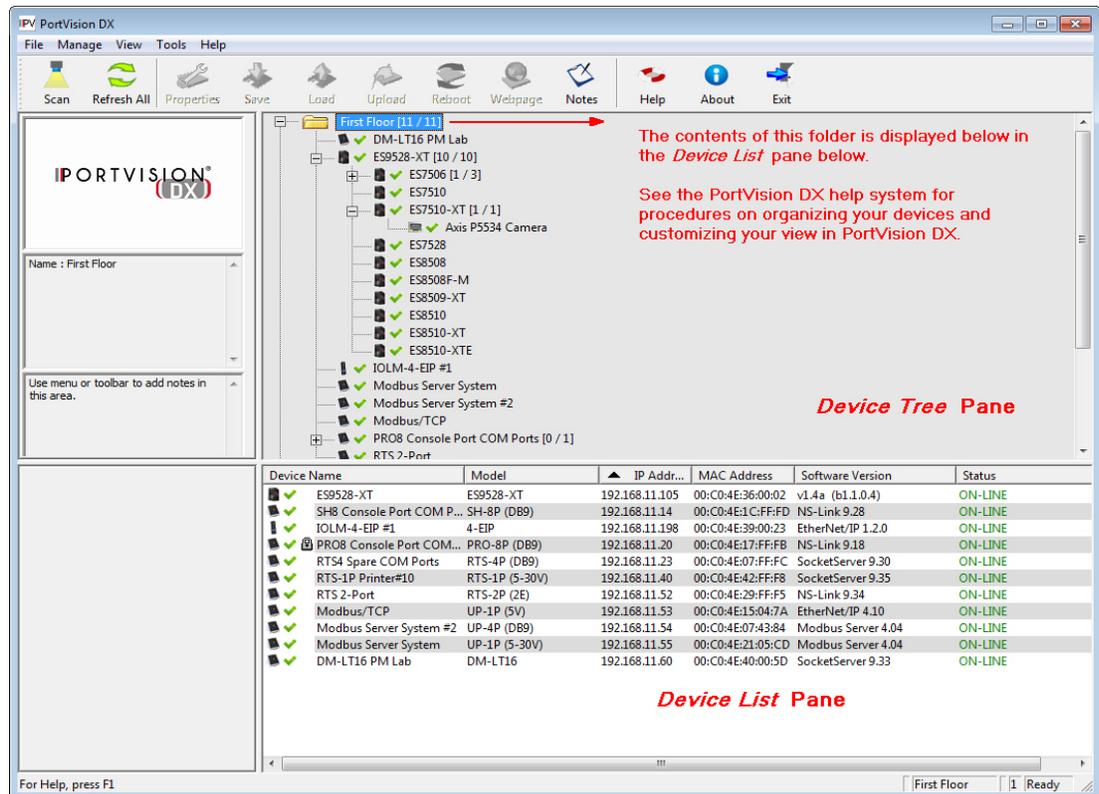

See the PortVision DX Help system for detailed information about modifying the view. For example, the above screen shot illustrates devices layered in folders.



Accessing RocketLinX Documentation from PortVision DX

You can use this procedure in PortVision DX to [download](#) and [open the previously downloaded documents](#) for the RocketLinX.


How to Download Documentation

Use this procedure to initially download a document or documents.

1. If necessary, open PortVision DX.
2. Click **Help > Documentation**.
3. Optionally, click the **DOWNLOAD THE CURRENT DOCUMENTATION CATALOG ONLINE** button to make sure that the latest documentation is available to PortVision DX.

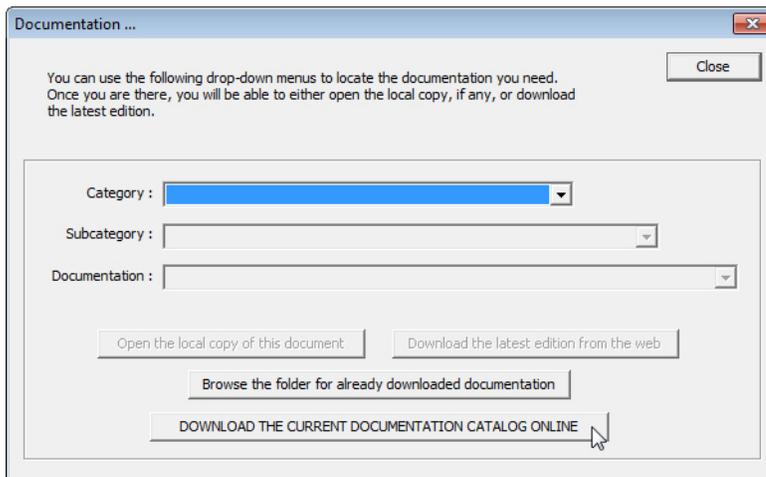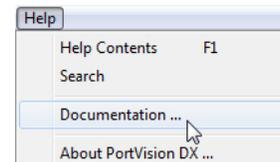

4. Select the product **Category** from the drop list.
5. Select the document you want to download from the **Documentation** drop list.

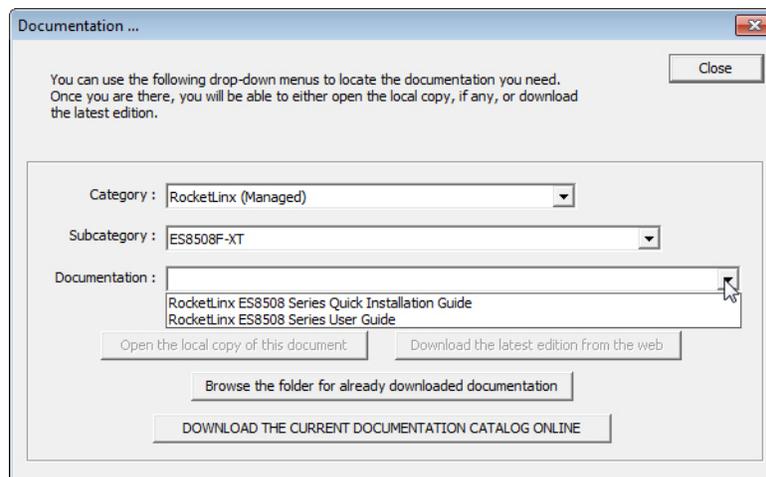

Note: This image may not reflect your RocketLinX.

6. Click the **Download the latest edition from the web** button.

Note: It may take a few minutes to download, depending on your connection speed. The document opens automatically after it has downloaded.

7. Click **Close** if you have downloaded all of the documents that you wanted.


How to Open Previously Downloaded Documents

Use the following procedure to access previously downloaded documents in PortVision DX.

Note: *Optionally, you can browse to the **Program Files (x86) > Control > PortVision DX > Docs** subdirectory and open the document.*

1. If necessary, open **PortVision DX > Start/Programs > Control > PortVision DX > PortVision DX** or use the desktop shortcut.
2. Click **Help > Documentation**.
3. Click the **Open the local copy of the document** button to view the document.

Note: *This image may not reflect your RocketLinx.*

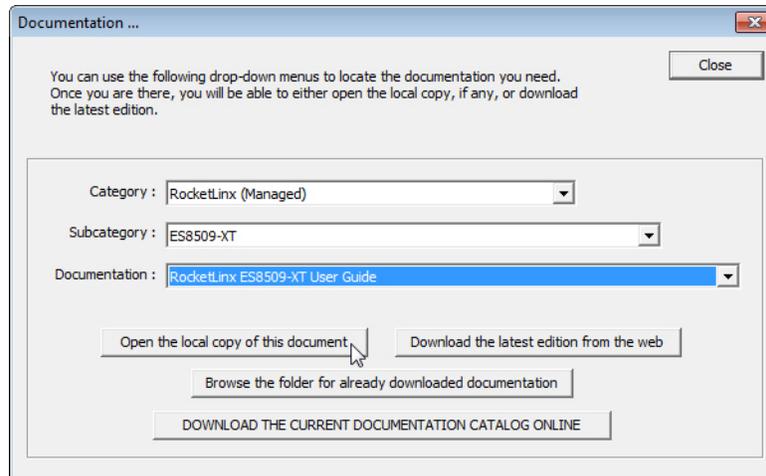

Note: *If the document fails to open, it may be that your browser has been disabled. You can still access the document by clicking the **Browse the folder for already downloaded documentation** button and opening the document with your custom browser.*

4. Click **Close** in the *Documentation...* popup, unless you want to open or download other documents.

Configuration Using the Web User Interface

The ES7510-XT provides in-band and out-band configuration methods:

- Out-band management means that you configure the ES7510-XT using the RS-232 console cable and the Command Line Interface (CLI) to access the ES7510-XT without attaching an admin PC to the network. You can use out-band management if you lose the network connection to the ES7510-XT. The CLI and Telnet are discussed in [Configuration Using the Command Line Interface \(CLI\)](#) on Page 135.
- In-band management means that you connect remotely using the ES7510-XT IP address through the network. You can remotely connect with the ES7510-XT web user interface or a Telnet console and the CLI. The ES7510-XT provides HTTP web user interface ([Page 34](#)) and secure HTTPS web user interface ([Page 35](#)) for web management.

Configuration Overview

This subsection discusses a minimum level of configuration required to operate the ES7510-XT.


1. If you have not done so, install the hardware, see [Hardware Installation](#) on Page 9.
2. If you are planning on using in-band management, you need to program the ES7510-XT IP address to meet your network requirements. The easiest way to configure the IP address is using a Windows system and PortVision DX, see [Configuring the Network Settings](#) on Page 20.
3. If you are planning on connecting PDs, see [PoE Control](#) on Page 74 to configure the PoE port characteristics,.
4. Configure other features as desired. You can refer to the [Feature Overview](#) on Page 37 to locate configuration information or use these links:
 - [Basic Settings](#) on Page 46
 - [Port Configuration](#) on Page 66
 - [Power over Ethernet](#) on Page 74
 - [Network Redundancy](#) on Page 79
 - [VLAN](#) on Page 93 and [Private VLAN](#) on Page 99
 - [Traffic Prioritization](#) on Page 103
 - [Multicast Filtering](#) on Page 107
 - [SNMP](#) on Page 111
 - [Security](#) on Page 114
 - [Warning](#) on Page 121
 - [Monitor and Diag](#) on Page 126
 - [Device Front Panel](#) on Page 133
 - [Save to Flash](#) on Page 134
 - [Logout](#) on Page 134

Web User Interface

You can use any standard web browser to configure and communicate with the ES7510-XT from anywhere on the network.

The default IP address for the ES7510-XT is **192.168.250.250**.

1. Open a command prompt window and ping the IP address for the ES7510-XT to verify a normal response time.

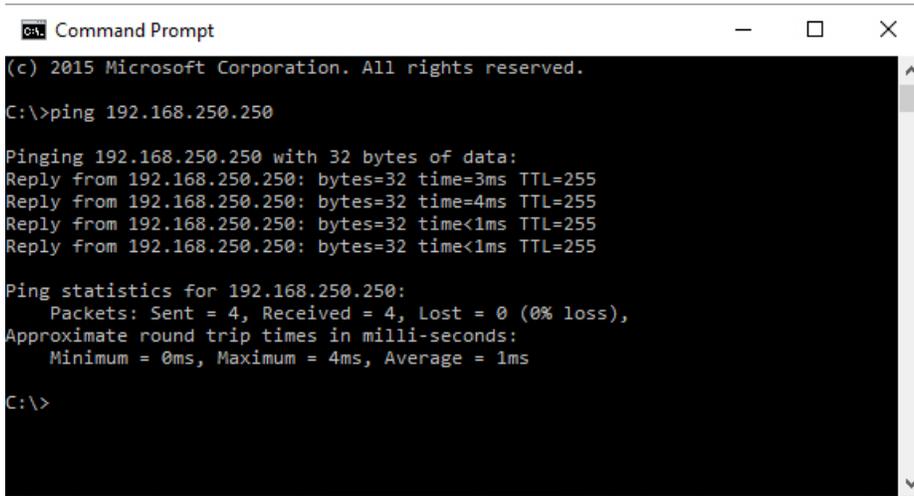

```
(c) 2015 Microsoft Corporation. All rights reserved.  
C:\>ping 192.168.250.250  
  
Pinging 192.168.250.250 with 32 bytes of data:  
Reply from 192.168.250.250: bytes=32 time=3ms TTL=255  
Reply from 192.168.250.250: bytes=32 time=4ms TTL=255  
Reply from 192.168.250.250: bytes=32 time<1ms TTL=255  
Reply from 192.168.250.250: bytes=32 time<1ms TTL=255  
  
Ping statistics for 192.168.250.250:  
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),  
    Approximate round trip times in milli-seconds:  
        Minimum = 0ms, Maximum = 4ms, Average = 1ms  
  
C:\>
```

Note: If you did not program the IP address for your network using PortVision DX ([Configuring the Network Settings](#) on Page 20), you need to change your computer IP address to **192.168.250.x** (Network Mask: 255.255.0.0).

2. Launch the web browser on the PC using one of these methods:
 - Right-click the ES7510-XT in PortVision DX and click **Webpage**.
 - Open your browser, enter the IP address of the switch, and then press **Enter**. For example: **http://10.0.0.114**.
3. Enter the user name, the password, and click **OK**. The default user name and password are both **admin**. The *Welcome* page of the web interface then appears.



Welcome to the ES7510-XT

Name

Password



4. If you have not done so, you can change the ES7510-XT IP address to meet your network environment.
 - a. Double-click **Basic Setting**.
 - b. Click **IP Configuration**.
 - To use static addressing, enter a valid IP address, subnet mask and default gateway.
 - To use DHCP, click **Enable** in the **DHCP Client** drop list.
 - c. Click **Apply**.
5. If you are planning on connecting PDs, configure the PoE port characteristics, see [PoE Control](#) on Page 74. You can use the [Feature Overview](#) on Page 37 to locate other features that you may want to configure.

Secure Web User Interface

The ES7510-XT web user interface also provides secured management through an HTTPS login so that all of the configuration commands are secure.

If you did not program the IP address for your network using PortVision DX ([Configuring the Network Settings](#) on Page 20), you need to change your computer IP address to **192.168.250.x** (Network Mask: 255.255.0.0). The default IP address for the ES7510-XT is *192.168.250.250*.

1. Open a command prompt window and ping the IP address for the ES7510-XT to verify a normal response time.


```

Command Prompt
(c) 2015 Microsoft Corporation. All rights reserved.
C:\>ping 192.168.250.250

Pinging 192.168.250.250 with 32 bytes of data:
Reply from 192.168.250.250: bytes=32 time=3ms TTL=255
Reply from 192.168.250.250: bytes=32 time=4ms TTL=255
Reply from 192.168.250.250: bytes=32 time<1ms TTL=255
Reply from 192.168.250.250: bytes=32 time<1ms TTL=255

Ping statistics for 192.168.250.250:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 4ms, Average = 1ms
C:\>
  
```

2. Launch the web browser and type **https://192.168.250.250** (or the IP address of the ES7510-XT).and then press **Enter**.
3. Click **Continue to the web site (not recommended)**.

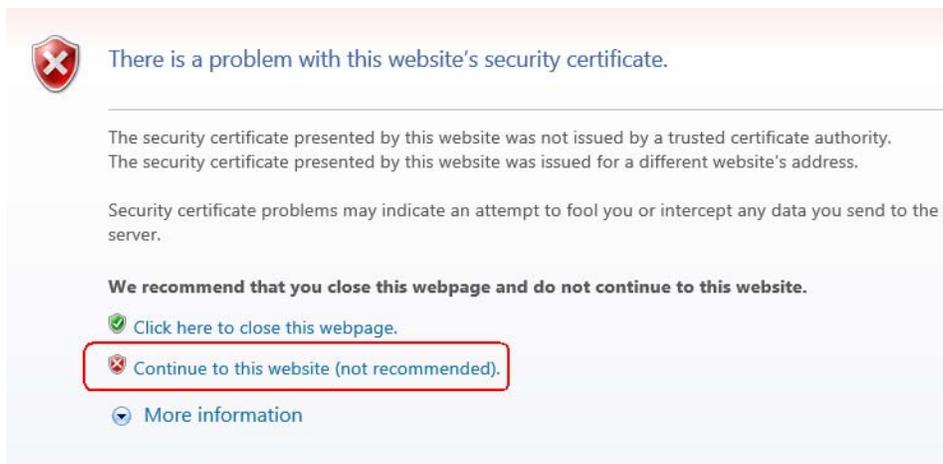

4. Enter the user name and the password and click **OK**. The default user name and password are both **admin**.

The *Welcome* page of the web management interface then appears.



5. If you have not done so, you can change the ES7510-XT IP address to meet your network environment.
 - a. Double-click **Basic Setting**.
 - b. Click **IP Configuration**.
 - To use static addressing, enter a valid IP address, subnet mask and default gateway.
 - To use DHCP, click **Enable** in the **DHCP Client** drop list.
 - c. Click **Apply**.
6. If you are planning on connecting PDs, configure the PoE port characteristics, see [PoE Control](#) on Page 74.

Feature Overview

The following table provides detailed information about ES7510-XT features and provides the location of the configuration information in the web user interface.

Type	Category	Details
802.1x Port-Based Network Access Control Configuration	802.1x Configuration on Page 110	<ul style="list-style-type: none"> • System Authentication Control - Enable/Disable • Authentication Method - RADIUS or Local • RADIUS Server - IP Address, Shared Key, Server Port, and Accounting Port • Local RADIUS User - User Name, Password, and VID • Secondary RADIUS Server - IP Address, Shared Key, Server Port, and Accounting Port • Local RADIUS User List
802.1x Port-Based Network Access Control Port Configuration	802.1x Port Configuration on Page 111	<p>Port Configuration</p> <ul style="list-style-type: none"> • Port Control - Auto, Forced Authorized, or Force Unauthorized • Re-authentication - Enable/Disable • Maximum Request • Guest VLAN • Host Mode - Single/Multi • Admin Control Direction - Both or In <p>Timeout Configuration</p> <ul style="list-style-type: none"> • Port by Port • Re-Authentication Periods • Quiet Period • Tx Period • Supplicant Timeouts • Server Timeouts
802.1x Port-Based Network Access Control Port Status	802.1x Port Status on Page 113	<ul style="list-style-type: none"> • Port by Port • Port Control • Authorize Status • Authorized Supplicant • Oper Control Direction
Admin Password	Admin Password on Page 50	<ul style="list-style-type: none"> • Admin
Backup and Restore	Backup and Restore on Page 60	Local or TFTP
CoS-Queuing Mapping	CoS-Queue Mapping on Page 100	<ul style="list-style-type: none"> • CoS 0 through 7 • Queue 0 through 3 • Queue 3 highest priority

Type	Category	Details
DHCP Server Configuration	DHCP Server Configuration on Page 56 DHCP Leased Entries on Page 58 DHCP Relay Agent on Page 59	<ul style="list-style-type: none"> • DHCP Server Configuration <ul style="list-style-type: none"> - Excluded Addresses and Manual Binding - Port and IP Address - Option 82 • DHCP Leased Entries • DHCP Relay Agent <ul style="list-style-type: none"> - Helper Address 1-4 - DHCP Option82 Relay Agent (Circuit ID/Remote ID)
DSCP-Queuing Mapping	DSCP-Queue Mapping on Page 101	<ul style="list-style-type: none"> • DSCP 0 through 7 • Queue 0 through 3 • Queue 3 highest priority
Event Selection	Event Selection on Page 116	<ul style="list-style-type: none"> • Device Cold Start • Device Warm Start • Authentication Failure • Time Synchronization Failure • Power 1 Failure • Power 2 Failure • Fault Relay • Ring Topology Change • SFP • Port by Port Event Selection • Port by Port PoE Event Selection
Fault Relay	Warning on Page 114	Relay 1- Multi-event <ul style="list-style-type: none"> • Power - DC1, DC2, or All • Port Link (Port or Ports) • Ring Failure • Ping Failure - IP Address • Ping Reset, IP Address, Reset Time (Sec), and Hold Time (Sec) • Dry Output - On Period (Sec) and Off Period (Sec) • DI - State (High or Low)
GMRP Configuration	Multicast Filtering on Page 102	<ul style="list-style-type: none"> • Enable/Disable • Port by Port Basis
GVRP Configuration	GVRP Configuration on Page 93	<ul style="list-style-type: none"> • 2K Entries • Enable/Disable GVRP Protocol • State - Enable/Disable • Join Timer • Leave Timer • Leave All Timer

Type	Category	Details
IGMP Query	IGMP Query on Page 104	<ul style="list-style-type: none"> • Version - Version 1, Version 2, or Disable • Query Intervals • Query Maximum Response Time
IGMP Snooping	IGMP Snooping on Page 103	<ul style="list-style-type: none"> • Enable/Disable • VID • Port by Port IGMP Snooping Table <ul style="list-style-type: none"> - IP Address - VID
IP Configuration	Basic Settings on Page 49	<ul style="list-style-type: none"> • IPv4 and IPv6 support • DHCP • DNS1 and DNS2
IP Security	IP Security on Page 109	<ul style="list-style-type: none"> • Enable/Disable • Security IP • Security IP List - Index and Security IP
Loop Protection	Loop Protection on Page 87	<ul style="list-style-type: none"> • Transmit Interval • Enable/Disable port by port • Status
MAC Address Table (8K)	MAC Address Table on Page 120	<ul style="list-style-type: none"> • Aging Time (Sec) • Static Unicast MAC Address - MAC Address, VID, and Port • Port by Port MAC Address Table View <ul style="list-style-type: none"> - Static Unicast - Dynamic Unicast - Static Multicast - Dynamic Multicast
MSTP Configuration	MSTP Configuration on Page 78	<ul style="list-style-type: none"> • MSTP Region Configuration - Name and Revision • New MST Instance - Instance ID, VLAN Group, and Instance Priority • Current MST Instance Configuration - Instance ID, VLAN Group, and Instance Priority

Type	Category	Details
MSTP Information	MSTP Information on Page 82	<ul style="list-style-type: none"> • Instance ID • Root Information <ul style="list-style-type: none"> - Root Address - Root Priority - Root Port - Root Path Cost - Maximum Age - Hello Time - Forward Delay • Port Information <ul style="list-style-type: none"> - Role - Port State - Path Cost - Port Priority - Link Type - Edge Port
MSTP Port Configuration	MSTP Port Configuration on Page 81	Instance ID <ul style="list-style-type: none"> • Port • Path Cost • Priority • Link Type • Edge Port
Ping Utility	Ping Utility on Page 126	Target IP Address
PoE Control	PoE Control on Page 74	<ul style="list-style-type: none"> • PoE SystemMode - Enable/Disable • DC1 and DC2 Power Budget - Watts, Voltage, and Power Budget Warning Level • Port by Port <ul style="list-style-type: none"> - PoE - Enable/Disable - Powering Mode - 802.3af, 802.3at (LLDP), 802.3af (2-event) or Force - ing, 802.3atPower Budget Mode - Auto or Manual - Power Budget (W) - Power Priority - Critical, High, Or Low • PD Status Detection - Enable/Disable <ul style="list-style-type: none"> - PD IP Address - Cycle Time
PoE Scheduling	PoE Scheduling on Page 77	PoE Ports On/Off on an hourly/daily basis.

Type	Category	Details
PoE Status	PoE Status on Page 78	<ul style="list-style-type: none"> • Power Budget • Output Power • Power Budget Warning Level • Utilization • Event • PoE Mode Port by Port: <ul style="list-style-type: none"> • Operation Status • PD Class • Budget (W) • Consumption (W) • Voltage • Current
Port Control	Port Control on Page 68	<ul style="list-style-type: none"> • Enable/Disable Port State • Speed/Duplex - Auto-Negotiation, 10 Full/Half, 100 Full/Half, and 1000 Full (Ports 9/10) • Flow control - Disable/Symmetric • User-Defined Description
Port Mirror Mode	Port Mirroring on Page 123	<ul style="list-style-type: none"> • Port Mirror Mode - Enable/Disable • Port by Port <ul style="list-style-type: none"> - Source Port - Rx and Tx - Destination Port - Rx and Tx
Port Security	Port Security on Page 108	<ul style="list-style-type: none"> • Port Security State - Port by Port • Add Port Security Entry - Port, VID, and MAC Address • Port Security Entry List - Port VID, and MAC Address
Port Statistics	Port Statistics on Page 122	Port by Port <ul style="list-style-type: none"> • Type • Link • State • Rx and Tx Good • Rx and Tx Bad • Rx Abort • Collision

Type	Category	Details
Port Status	Port Status on Page 70	<ul style="list-style-type: none"> • Port Type • Link - Up/Down • State - Enable/Disable • Speed/Duplex • Flow Control • SFP Vendor, Wavelength, and Distance • SFP DDM - Temperature, Tx Power, and Rx Power
Port Trunk	Aggregation Setting on Page 72 Aggregation Status on Page 73	Aggregation Settings <ul style="list-style-type: none"> • Group ID - Trunk 1-8 Trunk Type - Static or 802.3ad LACP Aggregation Status by Trunk <ul style="list-style-type: none"> • Type • Aggregated Ports • Individual Ports • Link down Ports
PVLAN Configuration	PVLAN Configuration on Page 95	<ul style="list-style-type: none"> • VLAN ID • PVLAN Type - None, Primary, Isolated, and Community
PVLAN Information	PVLAN Information on Page 97	<ul style="list-style-type: none"> • Primary VLAN • Secondary VLAN • Secondary VLAN Type • Ports
PVLAN Port Configuration	PVLAN Port Configuration on Page 96	Port Configuration <ul style="list-style-type: none"> • PVLAN Port Type - Normal, Host, or Promiscuous • VLAN ID PVLAN Association <ul style="list-style-type: none"> • Secondary VLAN • Primary VLAN
QoS Setting	QoS Setting on Page 98	Queue scheduling <ul style="list-style-type: none"> • Use 8.4.2.1 Weighted Fair Queuing Scheme • Use A Strict Priority Scheme Port Setting <ul style="list-style-type: none"> • CoS - 0 through 7 • Trust Mode - COS Only, DSCP Only, COS First, or DSCP First
Rate Control	Rate Control on Page 71	<ul style="list-style-type: none"> • Ingress Packet Types - Broadcast Only, Broadcast/Multicast, Broadcast/Multicast/Unknown Unicast, and All • Ingress Rate (1 Mbps to 100Mbps) • Egress Packet Type • Egress Rate (1 Mbps to 100Mbps)

Type	Category	Details
Redundant Ring	Redundant Ring on Page 84	<ul style="list-style-type: none"> • Ring ID and Name • Ring Configuration <ul style="list-style-type: none"> - ID - Name - Version (Super Ring and Rapid Super Ring) - Device Priority - Ring Port - Path Cost - Ring Port2 - Path Cost - Rapid Dual Homing - Ring Status
Redundant Ring Information	Redundant Ring Information on Page 86	<ul style="list-style-type: none"> • 32 Ring ID Maximum (0-31) • Supports up to four 100M rings and two Gigabit rings per switch • Version • Role • Status • RM MAC • Blocking Port • Role Transition Count • Ring State Transition Count
Reset/Reboot	Load Default on Page 66 System Reboot on Page 67	<ul style="list-style-type: none"> • System Reset Button • Reset to Factory Default Values • Reboot from Interface
SNMP Configuration	SNMP Configuration on Page 105	<ul style="list-style-type: none"> • V1/V2c Community • Public - Read Only or Read and Write • Private - Read Only or Read and Write
SNMP Traps	SNMP Traps on Page 107	<ul style="list-style-type: none"> • Enable/Disable • Trap Server - Server IP Address, Community, and Version (V1 or V2c) • Trap Server Profile - Displays Server IP, Community, and Version
SNMP V3 Profile	SNMP V3 Profile on Page 106	SNMP V3 <ul style="list-style-type: none"> • User Name • Security Level • Authentication Level • Authentication Password • DES Password SNMP V3 Users - Displays Profile Information

Type	Category	Details
STP Configuration	STP Configuration on Page 75	<ul style="list-style-type: none"> • STP, RSTP, MSTP, or Disable • Bridge Address • Bridge Priority • Maximum Age • Hello Time • Forward Delay
STP Information	STP Information on Page 77	<ul style="list-style-type: none"> • Root Information <ul style="list-style-type: none"> - Root Address - Root Priority - Root Port - Root Path Cost - Maximum Age - Hello Time - Forward Delay • Port Information <ul style="list-style-type: none"> - Role - Port State - Path Cost - Port Priority - Link Type - Edge Port - Aggregated (D/Type)
STP Port Configuration	STP Port Configuration on Page 76	Port by Port <ul style="list-style-type: none"> • STP State • Path Cost • Priority • Link Type • Edge Port
SYSLOG Mode	SysLog Configuration on Page 118	<ul style="list-style-type: none"> • Disable, Local, Remote, or Both • Remote IP Address
System Event Logs	Event Log on Page 124	<ul style="list-style-type: none"> • Index • Date • Time • Event Log
Time Setting	Time Setting on Page 53	<ul style="list-style-type: none"> • IEEE 1588 • Manual or NTP Client • Time Zone Setting • Daylight Savings Time

Type	Category	Details
Topology Discovery	Topology Discovery (LLDP) on Page 125	<ul style="list-style-type: none"> • LLDP - Enable/Disable • LLDP Configuration - Timer and Hold Time • LLDP Port State - Local Port, Neighbor ID, Neighbor IP, and Neighbor VID
Unknown Multicast	Unknown Multicast on Page 104	<ul style="list-style-type: none"> • Send to Query Ports • Send to All Ports • Discard
Upgrade Firmware	that contains the configuration file Firmware Upgrade on Page 64	Local or TFTP
VLAN Configuration	VLAN Configuration on Page 90	<ul style="list-style-type: none"> • Tunneling support for 256 • Management VLAN ID • Static VLAN - ID and Name • Static VLAN Configuration - VLAN ID, Name, and Ports (Options: No VLAN, Trunk Link, or Access Link)
VLAN Port Configuration	VLAN Port Configuration on Page 89	<ul style="list-style-type: none"> • PVID • Tunnel Mode • Accept Frame Type • Ingress Filtering
VLAN Table	VLAN Table on Page 94	<ul style="list-style-type: none"> • VLAN ID • Name • Status • Port by Port
Warning - SMTP Configuration	SMTP Configuration on Page 119	<ul style="list-style-type: none"> • Email Alert - Enable/Disable • SMTP Server IP • Mail Account • Authentication • User Name • Password • Recipient Email Address 1-4

Basic Settings

The *Basic Setting* group allows you the ability to configure switch information, IP address, User name/ Password of the system. It also allows you to do firmware upgrade, backup and restore configuration, reload factory default, and reboot the system.

The following web pages are included in this group:

- [Switch Setting](#) on Page 46
- [Admin Password](#) on Page 48
- [IP Configuration](#) on Page 49
- [Time Setting](#) on Page 51
- [DHCP Server Configuration](#) on Page 54
 - [DHCP Leased Entries](#) on Page 56
 - [DHCP Option82 Relay Information](#) on Page 57
- [Backup and Restore](#) on Page 59
- [Firmware Upgrade](#) on Page 63
- [Load Default](#) on Page 64
- [System Reboot](#) on Page 65

Optionally, you can use the CLI for configuration, see [Basic Settings \(CLI\)](#) on Page 148.

Switch Setting

You can assign the **System Name**, **Location**, **Contact** and view ES7510-XT information.

Welcome to the ES7510-XT Industrial Managed Switch

Help

System Name	ES7510-XT
System Location	11 Floor - North End
System Contact	DLR
System OID	1.3.6.1.4.1.2882.2.3.10
System Description	ES7510-XT Industrial Managed Ethernet Switch
Firmware Version	2.0_b7-20160524-11:31:44
Device Mac	00C04E380002

Apply

Switch Setting Page	
System Name	You can assign a name to the ES7510-XT with up to 64 characters. After you configure the name, the CLI system selects the first 12 characters as the name in CLI system.
System Location	You can specify the ES7510-XT physical location with up to 64 characters.
System Contact	You can specify contact people with up to 64 characters by typing the Administrator's name, mail address or other information.
System OID	The SNMP Object ID of the ES7510-XT. You can follow the path to find its private MIB in an MIB browser. <i>Note: When you attempt to view private MIB, you should first compile private MIB files into your MIB browser.</i>
System Description	ES7510-XT Industrial Managed Ethernet Switch
Firmware Version	Displays the firmware version installed in this ES7510-XT.
Device MAC	Displays a unique hardware address (MAC address) assigned at the factory.
Apply	Click Apply to apply the settings. <i>Note: You must Save the settings (Page 134), if you want to maintain these settings if the ES7510-XT is powered off.</i>

Admin Password

You can change the user name and the password here to enhance security.

Admin Password

Name	<input type="text" value="admin"/>
New Password	<input type="text"/>
Confirm Password	<input type="text"/>

RADIUS Server

RADIUS Server IP	<input type="text"/>
Shared Key	<input type="text"/>
Server Port	<input type="text"/>

Secondary RADIUS Server

RADIUS Server IP	<input type="text"/>
Shared Key	<input type="text"/>
Server Port	<input type="text"/>

Admin Password Page	
Administrator	
Name	You can enter a new user name here. The default name is admin .
Password	You can enter a new password here. The default password is admin .
Confirm Password	You need to type the new password again to confirm it.
RADIUS Server	
RADIUS Server IP	The IP address of the RADIUS server.
Shared Key	The password for communication between switch and RADIUS Server.
Server Port	UDP port of RADIUS server.
Secondary RADIUS Server	
RADIUS Server IP	The IP address of the RADIUS server.
Shared Key	The password for communication between switch and RADIUS Server.
Server Port	UDP port of RADIUS server.
Apply	Click Apply to apply the settings. Note: You must Save the settings (Page 134), if you want to maintain these settings if the ES7510-XT is powered off.

IP Configuration

This web page allows you to configure the ES7510-XT's IP address settings.

IP Configuration

Help

DHCP Client Disable ▾

Apply

IPv4 Configuration

IP Address	10.0.0.116
Subnet Mask	255.255.0.0
Default Gateway	
DNS Server 1	
DNS Server 2	

Apply

IPv6 Configuration

IPv6 Address	Prefix Length
<input type="text"/>	<input type="text"/>

Add

IPv6 Default Gateway

Apply

	IPv6 Address
<input type="checkbox"/>	fe80::2c0:4eff:fe5f:68/64

Remove Reload

IPv6 Neighbor Table

Neighbor	Interface	MAC Address	State

Reload

IP Configuration Page	
DHCP Client	You can select to Enable or Disable the DHCP Client function. When the DHCP Client function is enabled, an IP address is assigned to the switch from the network's DHCP server. In this mode, the default IP address is replaced by the one assigned by DHCP server. If DHCP Client is disabled, then the IP address that you specified is used.
IP Address Default: 192.168.250.250	You can assign the IP address reserved by your network for the ES7510-XT. If the DHCP Client function is enabled, you do not need to assign an IP address to the ES7510-XT, because it is overwritten by the DHCP server and displays here.
Subnet Mask Default: 255.255.255.0	You can assign the subnet mask for the IP address here. If the DHCP Client function is enabled, you do not need to assign the subnet mask. . Note: <i>In the CLI, the enabled bit of the subnet mask is used to represent the number displayed in the web management interface. For example, 8 represents: 255.0.0.0, 16 represents: 255.255.0.0, 24 represents: 255.255.255.0.</i>
Default Gateway Default: 192.168.250.1	You can assign the gateway for the switch here. Note: <i>In the CLI, use 0.0.0.0/0 to represent the default gateway.</i>
DNS Server 1/2	The Domain Name System (DNS) is a hierarchical naming system built on a distributed database for computers, services, or any resource connected to the Internet or a private network. It associates various information with domain names assigned to each of the participating entities. Most importantly, it translates domain names meaningful into the numerical identifiers associated with networking equipment for the purpose of locating and addressing these devices worldwide.
IPv6 Address	You can enter an IPv6 address for the ES7510-XT. An IPv6 address is represented as eight groups of four hexadecimal digits, each group representing 16 bits (two octets). The groups are separated by colons (:), and the length of IPv6 address is 128bits. The 64-bit interface identifier is automatically generated from the MAC address for the ES7510-XT using the modified EUI-64 format.
Prefix Length	This IPv6 prefix specifies the size of a network or subnet. The default is 64.
IPv6 Default Gateway	The IPv6 default gateway IP address identifies the gateway (for example, a router) that receives and forwards those packets whose addresses are unknown to the local network. The agent uses the default gateway address when sending alert packets to the management workstation on a network other than the local network.
IPv6 Address	This table shows the IPv6 addresses that have been added to the management VLAN. To remove an entry, click the check box next to it and then click the Remove button. To reload the list, click the Reload button.
IPv6 Neighbor Table	
Neighbor	The <i>IPv6 Neighbor Table</i> lists neighbors of the ES7510-XT.
Interface	The interface connected to the neighbor.
MAC address	This is the MAC address of the neighbor.
State	This displays the Neighbor Unreachability Detection (NUD) state of the neighbor entry.
Remove	Click the Remove button to remove an IPv6 configuration or IPv6 Neighbor Table entry.
Reload	Click the Reload button to reload IPv6 configuration.
Apply	Click Apply to apply the settings. Note: <i>You must Save the settings (Page 134), if you want to maintain these settings if the ES7510-XT is powered off.</i>

Time Setting

Time Setting allows you to set the time manually or through a Network Time Protocol (NTP) server. NTP is used to synchronize computer clocks on the Internet. You can configure NTP settings here to synchronize the clocks of several switches on the network. The ES7510-XT also provides Daylight Saving functionality.

Time Setting [Help](#)

Current Time	Yr 2009 Mon 01 Day 2 Hr 06 Mn 33 Sec 09 <input type="button" value="Get PC Time"/>
Time Zone	(GMT) Greenwich Mean Time: Dublin, Edinburgh, Lisbon, London ▼
NTP	<input type="checkbox"/> Enable NTP client update
Primary server	N/A
Secondary server	N/A
Daylight saving Time	Disable ▼
Daylight Saving Start	1st ▼ Sun ▼ in Jan ▼ at 00 ▼ 00 ▼
Daylight Saving End	1st ▼ Sun ▼ in Jan ▼ at 00 ▼ 00 ▼

IEEE 1588	
PTP State	Disable ▼
Mode	Auto ▼

Time Setting Page	
Current Time	<p>Manual Setting: Click the Get PC Time button to get PC's time setting for the ES7510-XT or enter the appropriate information in the fields provided.</p> <p>NTP client: Click Time Setting Source if you want the NTP client to permit the ES7510-XT to enable the NTP client service. NTP client is automatically enabled if you change the Time Setting Source to NTP Client. The system sends a request packet to acquire current time from the NTP server you assign.</p>
Time Zone	Select the time zone where the ES7510-XT is located. The following table lists the time zones for different locations for your reference. The default time zone is (GMT) Greenwich Mean Time.
NTP	Click this check box to enable NTP (Network Time Protocol).
Primary/Secondary Server	The Primary Server is the primary NTP server for which you want to synchronize time. The Secondary Server is the back up NTP server to use if the Primary Server becomes unavailable.
Daylight Saving Time	You can enable Daylight Saving Time and then set the Daylight Saving Time Start and End times. During Daylight Saving Time, the ES7510-XT time is one hour earlier than the actual time.
PTP State	Select Enable if you want to use PTP (Precision Time Protocol). The IEEE 1588 PTP (Precision Time Protocol) supports very precise time synchronization in an Ethernet network.

Time Setting Page (Continued)	
Mode	<p>Select Auto, Master, or Slave for the PTP mode.</p> <p>There are two clocks, master and slave. The master device periodically launches an exchange of messages with slave devices to help each slave clock re-compute the offset between its clock and the master's clock.</p> <p>To enable IEEE 1588, select Enable in the PTP State and choose Auto, Master or Slave Mode. After the time is synchronized, the system time displays the correct time from the PTP server.</p>
Apply	<p>Click Apply to apply the settings.</p> <p>Note: You must Save the settings (Page 134), if you want to maintain these settings if the ES7510-XT is powered off.</p>

```
Switch(config)# clock timezone
 01 (GMT-12:00) Eniwetok, Kwajalein
 02 (GMT-11:00) Midway Island, Samoa
 03 (GMT-10:00) Hawaii
 04 (GMT-09:00) Alaska
 05 (GMT-08:00) Pacific Time (US & Canada), Tijuana
 06 (GMT-07:00) Arizona
 07 (GMT-07:00) Mountain Time (US & Canada)
 08 (GMT-06:00) Central America
 09 (GMT-06:00) Central Time (US & Canada)
 10 (GMT-06:00) Mexico City
 11 (GMT-06:00) Saskatchewan
 12 (GMT-05:00) Bogota, Lima, Quito
 13 (GMT-05:00) Eastern Time (US & Canada)
 14 (GMT-05:00) Indiana (East)
 15 (GMT-04:00) Atlantic Time (Canada)
 16 (GMT-04:00) Caracas, La Paz
 17 (GMT-04:00) Santiago
 18 (GMT-03:00) Newfoundland
 19 (GMT-03:00) Brasilia
 20 (GMT-03:00) Buenos Aires, Georgetown
 21 (GMT-03:00) Greenland
 22 (GMT-02:00) Mid-Atlantic
 23 (GMT-01:00) Azores
 24 (GMT-01:00) Cape Verde Is.
 25 (GMT) Casablanca, Monrovia
 26 (GMT) Greenwich Mean Time: Dublin, Edinburgh, Lisbon, London
 27 (GMT+01:00) Amsterdam, Berlin, Bern, Rome, Stockholm, Vienna
 28 (GMT+01:00) Belgrade, Bratislava, Budapest, Ljubljana, Prague
 29 (GMT+01:00) Brussels, Copenhagen, Madrid, Paris
 30 (GMT+01:00) Sarajevo, Skopje, Sofija, Vilnius, Warsaw, Zagreb
 31 (GMT+01:00) West Central Africa
 32 (GMT+02:00) Athens, Istanbul, Minsk
 33 (GMT+02:00) Bucharest
 34 (GMT+02:00) Cairo
 35 (GMT+02:00) Harare, Pretoria
 36 (GMT+02:00) Helsinki, Riga, Tallinn
 37 (GMT+02:00) Jerusalem
```

38 (GMT+03:00) Baghdad
 39 (GMT+03:00) Kuwait, Riyadh
 40 (GMT+03:00) Moscow, St. Petersburg, Volgograd
 41 (GMT+03:00) Nairobi
 42 (GMT+03:30) Tehran
 43 (GMT+04:00) Abu Dhabi, Muscat
 44 (GMT+04:00) Baku, Tbilisi, Yerevan
 45 (GMT+04:30) Kabul
 46 (GMT+05:00) Ekaterinburg
 47 (GMT+05:00) Islamabad, Karachi, Tashkent
 48 (GMT+05:30) Calcutta, Chennai, Mumbai, New Delhi
 49 (GMT+05:45) Kathmandu
 50 (GMT+06:00) Almaty, Novosibirsk
 51 (GMT+06:00) Astana, Dhaka
 52 (GMT+06:00) Sri Jayawardenepura
 53 (GMT+06:30) Rangoon
 54 (GMT+07:00) Bangkok, Hanoi, Jakarta
 55 (GMT+07:00) Krasnoyarsk
 56 (GMT+08:00) Beijing, Chongqing, Hong Kong, Urumqi
 57 (GMT+08:00) Irkutsk, Ulaan Bataar
 58 (GMT+08:00) Kuala Lumpur, Singapore
 59 (GMT+08:00) Perth
 60 (GMT+08:00) Taipei
 61 (GMT+09:00) Osaka, Sapporo, Tokyo
 62 (GMT+09:00) Seoul
 63 (GMT+09:00) Yakutsk
 64 (GMT+09:30) Adelaide
 65 (GMT+09:30) Darwin
 66 (GMT+10:00) Brisbane
 67 (GMT+10:00) Canberra, Melbourne, Sydney
 68 (GMT+10:00) Guam, Port Moresby
 69 (GMT+10:00) Hobart
 70 (GMT+10:00) Vladivostok
 71 (GMT+11:00) Magadan, Solomon Is., New Caledonia
 72 (GMT+12:00) Auckland, Wellington
 73 (GMT+12:00) Fiji, Kamchatka, Marshall Is.
 74 (GMT+13:00) Nuku'alofa

DHCP Server Configuration

Use this page to configure DHCP server services.

Server Configuration

Global Setting

Address Pool Setting

Network	<input type="text" value="0.0.0.0"/>
Mask	<input type="text" value="0.0.0.0"/>
Default Gateway	<input type="text" value="0.0.0.0"/>
Lease Time	<input type="text" value="604800"/> <small>(80~31536000 seconds)</small>

Excluded Address List

Excluded IP:

Index	Address
-------	---------

Static Port/IP Binding List

Port:

IP Address:

Index	Port	Address
-------	------	---------

Static MAC/IP Binding List

MAC Address:

IP Address:

Index	MAC	Address
-------	-----	---------

Option82/IP Binding List

Circuit ID:

Remote ID:

IP Address:

Index	Circuit ID	Remote ID	Address
-------	------------	-----------	---------

DHCP Server Configuration Page	
Global Setting	You can select to Enable or Disable the DHCP Server function. The ES7510-XT assigns a new IP address to link partners.
Apply	Click Apply to apply the settings. Note: You must Save the settings (Page 134), if you want to maintain these settings if the ES7510-XT is powered off.
Address Pool Setting	
Network	Enter the IPv4 address for the DHCP server.
Subnet Mask	Enter the subnet mask for the DHCP server.
Default Gateway	Enter the IP gateway address for the DHCP server.
Lease Time	Enter the Lease Time in seconds for the client.
Excluded Address List	
Excluded IP	You can type a specific address into the Excluded IP field for the DHCP server reserved IP address. The IP addresses listed in the Excluded Address List Table are not assigned to the network devices. Add or remove an IP address from the Excluded Address List by clicking Add or Remove . Note: By default, only the table heading are displayed until an IP address is entered in the Excluded IP field and added using the Add button.
Static Port/IP Binding List	
Port	Enter the client port number for the DHCP server.
IP Address	Enter the client IP address for the DHCP server. After entering the port number and IP address, click Add . To remove a port and associated IP address, click Remove . Click Reload to reload selected port and IP address entries. Note: By default, only the table heading are displayed until information is entered in the Port and IP Address fields and added using the Add button.
Static MAC/IP Binding List	
IP Address	The ES7510-XT provides an IP address binding and removing function. Enter the specified IP address, and then click Add to add a new IP address binding rule for a specified link partner, like a PLC, or any device without DHCP client function. To remove an IP address from the Manual Binding List, highlight the rule and click Remove .
MAC Address	The ES7510-XT provides a MAC address binding and removing function. Enter the specified MAC address, and then click Add to add a new MAC address binding rule for a specified link partner, like a PLC, or any device without DHCP client function. The MAC address format is xxxx.xxxx.xxxx; for example, 00C0.4E38.0001. To remove a MAC address from the Static MAC/IP Binding List, highlight the rule and click Remove . Note: By default, only the table heading are displayed until information is entered in the IP Address and MAC Address fields and added using the Add button.

DHCP Server Configuration Page (Continued)	
Option82/IP Binding List	
Circuit ID	The Circuit ID of the Option82 IP address configuration.
Remote ID	The Remote ID of the Option82 IP address configuration. After entering the IP Address, Circuit ID, and Remote ID, click Add . Click the Remove button to remove selected Option82 IP Address table entries. Click the Reload button to reload selected Option82 IP Address table entries.
IP Address	Option 82 IP Address Configuration: fully supports DHCP relay function. The IP address of the Option82 IP address configuration. Note: By default, only the table heading are displayed until information is entered in the Circuit ID , Remote ID , and IP Address fields and added using the Add button.

DHCP Leased Entries

The ES7510-XT provides a table that displays assigned IP addresses.

Leased Entries

Index	IP Address	MAC Address	Leased Time Remains

DHCP Leased Entries Page	
Index	Index of DHCP leased entries.
Binding	Manual or auto binding IP addresses and MAC addresses.
IP Address	The IP address of the leased entry.
MAC Address	The MAC Address of the leased entry.
Lease Time(s)	The lease time of the leased entry (in seconds).
Reload	Click to reload DHCP leased entries.

Note: By default, only the table heading are displayed until there is data to display.

DHCP Option82 Relay Information

This subsection discusses the *DHCP Option82 Relay Information* page.

Note: You must **Save** the settings ([Page 134](#)), if you want to maintain these settings if the ES7510-XT is powered off.

Option82 Information
Help

DHCP Relay Agent Disable ▾

Apply

Helper Address

Helper Address

Add

<input type="checkbox"/>	Helper Address 1	<input style="width: 100px;" type="text"/>
<input type="checkbox"/>	Helper Address 2	<input style="width: 100px;" type="text"/>
<input type="checkbox"/>	Helper Address 3	<input style="width: 100px;" type="text"/>
<input type="checkbox"/>	Helper Address 4	<input style="width: 100px;" type="text"/>

Remove

Relay Policy

Replace
 Keep
 Drop

Apply

DHCP Option82 Relay Information Page	
Relay Agent	You can select to Enable or Disable the DHCP Option82 Relay function, which assigns a new IP address to link partners.
Helper Address	
Helper Address	Enter the DHCP Server address for the Relay Agent and click Add . The Helper Addresses appear in the table below.
Helper Address 1-4	DHCP Server addresses for the Relay Agent.
Relay Policy	
Relay policy replace	Replaces the existing option 82 field and adds new option 82 field. This is the default when the DHCP Relay Agent is enabled.
Relay policy keep	Keeps the original option 82 field and forwards to server.
Relay policy drop	Drops the option 82 field and do not add any option 82 field.

Circuit ID

Port 1 Default (VLAN/Port) User Defined

Apply

Port	Circuit ID	HEX value
1	<input type="text"/>	<input type="text"/>
2	<input type="text"/>	<input type="text"/>
3	<input type="text"/>	<input type="text"/>
4	<input type="text"/>	<input type="text"/>
5	<input type="text"/>	<input type="text"/>
6	<input type="text"/>	<input type="text"/>
7	<input type="text"/>	<input type="text"/>
8	<input type="text"/>	<input type="text"/>
9	<input type="text"/>	<input type="text"/>
10	<input type="text"/>	<input type="text"/>

DHCP Option82 Relay Information Page	
Circuit ID	
Circuit ID	<p>Default: Default value of the Circuit-ID.</p> <p>Port: Port of the switch.</p> <p>Circuit ID: The Circuit ID includes information specific to which circuit the request came in on. It is an identifier that is specific to the relay agent, so the type of circuit varies depending on the relay agent.</p>
Remote ID	
Remote-ID	<p>Default: Default value of the Remote-ID.</p> <p>IP Address: IP Address of the switch.</p> <p>Remote ID: The Remote-ID carries information relating to the remote host end of the circuit, which is the MAC address of the relay.</p>

Remote ID

Default (MAC Address)
 IP Address
 User Defined

Apply

Remote ID	HEX value
<input type="text"/>	<input type="text"/>

Backup and Restore

You can use the **Backup** option to save the current configuration saved in the ES7510-XT flash to a PC or laptop or your TFTP server.

This allows you to use the **Restore** option to restore a configuration file back to the ES7510-XT or load the same settings to another ES7510-XT. Before you can restore a configuration file, you must first save the backup configuration file to a local system or your TFTP server.

The ES7510-XT configuration file is a standard text file. You can open the file with WordPad or Notepad. You can also modify the file, add/remove the configuration settings, and then restore the file back to the ES7510-XT.

Backup and Restore
Help

Local Files

Load Settings from File	<input type="text"/>	Browse...	Upload
Save Settings to File	<input type="text"/>		
	Save...		

TFTP

IP	<input type="text"/>	This example file name may not reflect the name of your firmware file.
File Name	<input type="text" value="ES8520-XT-00C04E5F0C"/>	
Load/Save Settings	<input type="button" value="Load"/> <input type="button" value="Submit"/>	

Note: Optionally, you can use PortVision DX to back up and restore configuration files.

Backup & Restore Page	
Backup Configuration	<ul style="list-style-type: none"> Local File: The ES7510-XT acts as a file server and you can save the file to a local location, see Backup the Configuration - Local File Method on Page 60. TFTP Server: The ES7510-XT acts as a TFTP client, see Backup the Configuration - TFTP Server Method on Page 61. <p>Note: Pointing to the wrong file causes the entire configuration to be skipped.</p> <ul style="list-style-type: none"> The ES7510-XT provides a default configuration file in the ES7510-XT. To load the default configuration file, you can use the Reset on the Load Default page on Page 64 or the Reload command in the CLI (Page 147). You can use the CLI to view the latest settings running in the ES7510-XT. The information are the settings you have configured but have not yet saved to the flash. The settings must be saved to the flash in order to work after a power recycle. Use the running-config command to view the configuration file, see Show Running Configuration on Page 147. After you save the running-config to flash, the new settings are kept and work after the power is cycled. Use the show startup-config to view it in the CLI. The Backup command can only backup the configuration file to your PC or TFTP server.

Backup the Configuration - Local File Method

Use the following procedure to use the Local File method to save a configuration file.

1. Open the ES7510-XT web user interface and open the **Backup and Restore** page under *Basic Settings*.
2. Click the **Save** button next to the **Save Settings to a file** option. (The next step is slightly different depending on your browser.)

The screenshot shows the 'Backup and Restore' web interface. At the top, there is a 'Help' button. Below it, the 'Local Files' section contains two rows: 'Load Settings from File' with 'Browse...' and 'Upload' buttons, and 'Save Settings to File' with a 'Save...' button highlighted by a red box. The 'TFTP' section below has fields for 'IP', 'File Name' (containing 'ES8520-XT-00C04E5F0C'), and 'Load/Save Settings' (set to 'Load'), with a 'Submit' button.

3. Browse to the location that you want to store the backup configuration file, optionally enter a file name, and click **Save**. The default configuration file name is the RocketLinX ES7510-XT with a dash, followed by the MAC address of the ES7510-XT.

Note: You cannot use spaces in the path to the target file.

Restore the Configuration - Local Method

Use the following steps to upload a configuration that is stored locally.

1. Open the web user interface for the ES7510-XT and open the **Backup and Restore** page under *Basic Settings*.
2. Click the **Browse** button next to the **Load Settings from File** option. (The next step is dependent on the browser.)
3. Navigate to the configuration file location, select the file, and click the **Open** button.
4. Click the **Upload** button.

The screenshot shows the 'Backup and Restore' web interface. At the top, there is a 'Help' button. Below it, the 'Local Files' section contains two rows: 'Load Settings from File' with a text field containing 'C:\I_Work_Files\RocketLinX', 'Browse...' and 'Upload' buttons (the 'Upload' button is highlighted with a red box), and 'Save Settings to File' with a 'Save...' button. The 'TFTP' section below has fields for 'IP', 'File Name' (containing 'ES8520-XT-00C04E5F0C'), and 'Load/Save Settings' (set to 'Load'), with a 'Submit' button.

5. Click **Yes** to the *Are you sure that you want to upload the configuration file* message.
6. Click **Ok** to the *Please reboot the system* message.
7. Open the *Reboot* page and click **Yes**.

You are returned to the log in page.


Backup the Configuration - TFTP Server Method

If you do not have a TFTP server, you can download one from Control using the [Start the TFTP Server](#) subsection.

Start the TFTP Server

Use this procedure to download either the 32-bit or the 64-bit version from Control.

1. If necessary, download the appropriate **.zip** file for your operating system from: http://downloads.comtrol.com/contribs/utilities/3rd_party_utils_free/tftp_server to your system and unzip the file.
2. Execute the TFTP server application, click **Allow access**, and the TFTP server opens.

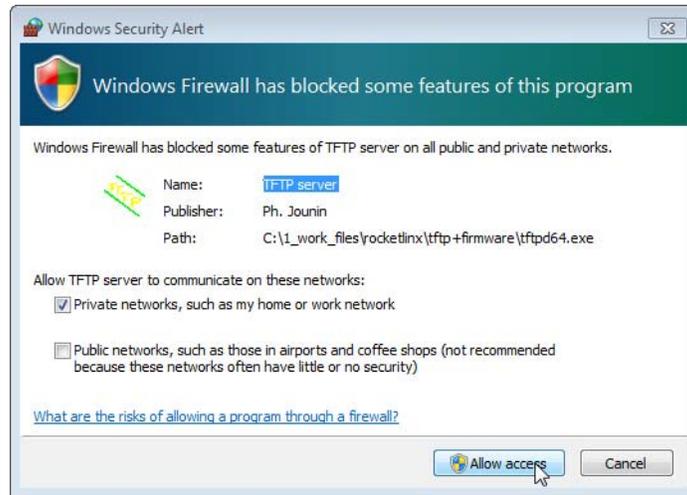


3. Leave the TFTP server open and go to [Create a Backup File](#) on Page 61.

Note: You will need the TFTP Server IP address in the next procedure.

Create a Backup File

You must have a TFTP server open.

1. Open the ES7510-XT web user interface and open the **Backup and Restore** page under *Basic Settings*.
2. Enter the TFTP IP address in the **IP** field.
3. Optionally, change the file name. The default configuration file name is ES7510-XT with a dash, followed by the MAC address of the ES7510-XT.
4. Select **Save** from the **Load/Save Settings** drop list.

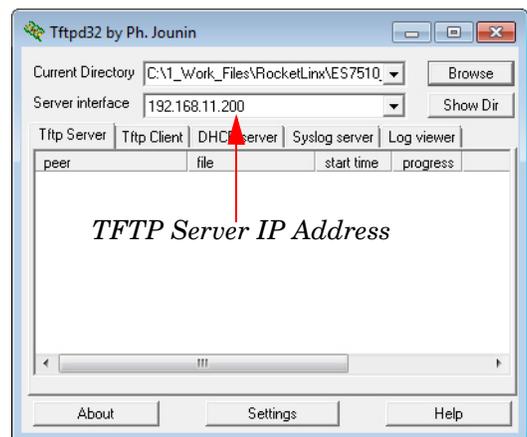

5. Click the **Submit** button.

The screenshot shows the 'Backup and Restore' web interface. At the top, there is a 'Help' button. Below it, the 'Local Files' section contains two rows of controls: 'Load Settings from File' with a text input field containing 'C:\1_Work_Files\RocketLinx', a 'Browse...' button, and an 'Upload' button; and 'Save Settings to File' with a 'Save...' button. The 'TFTP' section below has three rows: 'IP' with a text input field containing '10.0.0.202'; 'File Name' with a text input field containing 'ES8520-XT-00C04E5F0C'; and 'Load/Save Settings' with a dropdown menu set to 'Save' and a 'Submit' button. The 'Submit' button is highlighted with a red rectangle.

Note: You cannot use spaces in the path to the target file.

6. Click **OK** to close the popup message.
The backup file is located in the same directory that the TFTP server resides.

Restore the Configuration - TFTP Server Method

To restore a configuration file, you must open a TFTP server. If necessary, use [Start the TFTP Server](#) on Page 61.

The backup file must be located in the same directory that the TFTP server resides for this procedure to work.

1. Open the ES7510-XT web user interface, open the **Backup and Restore** page under *Basic Settings*.
2. Enter the TFTP IP address in the **IP** field.
3. If necessary, enter the configuration file name.
4. Select **Load** from the **Load/Save Settings** drop list.
5. Click the **Submit** button.

The screenshot shows the 'Backup and Restore' web interface. At the top, there is a 'Help' button. Below it, the 'Local Files' section contains two rows of controls: 'Load Settings from File' with a text input field, a 'Browse...' button, and an 'Upload' button; and 'Save Settings to File' with a 'Save...' button. The 'TFTP' section below has three rows: 'IP' with a text input field containing '10.0.0.202'; 'File Name' with a text input field containing 'ES8520-XT-00C04E5F0C'; and 'Load/Save Settings' with a dropdown menu set to 'Load' and a 'Submit' button. The 'IP' field, the 'Load' dropdown, and the 'Submit' button are highlighted with red rectangles.

6. Click **Ok** to *The settings were successfully changed* message.
7. Open the **Reboot** page.

Firmware Upgrade

Use this section to update the ES7510-XT with the latest firmware. Comtrol provides the latest firmware on the Comtrol [download site](#). Updated firmware may include new features, bug fixes, or other software changes. Comtrol Technical Support suggests you use the latest firmware before installing the ES7510-XT at a customer site.

Note: *Optionally, you can use PortVision DX to upload the latest firmware. If you need to upload a new version of the Bootloader, you must use PortVision DX or the CLI. You cannot use the web user interface to upload the Bootloader.*

Firmware Upgrade Page	
Select File	Use the browse button to locate the firmware file that you want to load.
Upgrade	Click the Upgrade button to load the firmware.

Upgrading Firmware (Local File)

You can use this procedure to upgrade the web interface firmware (not Bootloader).

Note: *You can also use PortVision DX to upload the web interface firmware. You must use PortVision DX or the CLI to upload the Bootloader firmware.*

You can use this procedure to upgrade the web interface firmware (not Bootloader).

1. Open the ES7510-XT web user interface, open the **Firmware Upgrade** page under *Basic Settings*.
2. Click the **browse** button, locate the firmware, highlight the **.bin** file, and click **Open**.
3. Click the **Upgrade** button.

Firmware Upgrade

Local file

Select File

TFTP

IP

File Name

After a few moments, a system message appears notifying you not to disconnect power, which is followed up with a *rebooting* message

Note: *The system is automatically rebooted after you finish upgrading firmware. You should alert the attached users before updating the firmware that network interruption may occur.*

Upgrading Firmware (TFTP Server)

You can use this procedure to upgrade the firmware (not Bootloader).

Note: You can also use PortVision DX to upload firmware. You must use PortVision DX or the CLI to upload Bootloader.

1. Open a TFTP server, if necessary, see [Start the TFTP Server](#) on Page 61.
2. Place the ES7510-XT .bin file in the same directory where the TFTP server resides.
3. If necessary, open the web user interface, open the **Firmware Upgrade** page in the *Basic Settings* group.
4. Enter the TFTP IP address in the **IP** field.
5. Enter firmware file name, and click the **Upgrade** button.

Firmware Upgrade

Local file

Select File

TFTP

IP

File Name

After a few moments, a system message appears notifying you not to disconnect power, which is followed up with a *rebooting* message

Note: The system is automatically rebooted after you finish upgrading firmware. You should alert the attached users before updating the firmware that network interruption may occur.

Load Default

You can reset the ES7510-XT configuration values to default settings, excluding the network information. Optionally, you can use the [Reset Button](#) on Page 15, which also resets the IP address with the default configuration values.

Note: You can also use PortVision DX to reset the switch to the default configuration values (excluding the network settings.).

1. Click the **Reset** button, if you want the ES7510-XT to reset all configurations to factory default settings.

Load default

Reset settings to default?

The system displays a popup message window after finishing. The default settings work after rebooting the ES7510-XT.

2. Click **OK** in the popup message to reset the configuration to the defaults.

3. Click **OK** to the *Please reboot the switch to reload default settings except IP address* message.
4. Go to the **Reboot** page, click the **Yes** button.

Reboot

Do you want to reboot?

Yes

System Reboot

System Reboot allows you to reboot the device. Most feature changes require a switch reboot to take affect.

Note: *Before rebooting, remember to click **Save** to save your settings. Otherwise, the settings you are lost when the ES7510-XT is powered off.*

Click the **Yes** button to reboot your ES7510-XT.

Reboot

Do you want to reboot?

Yes

Port Configuration

The *Port Configuration* group allows you to enable/disable port state, or configure port auto-negotiation, speed, duplex, flow control, port aggregation settings (port trunking), and rate limit control. It also allows you to view port status and aggregation information. The following pages are included in this group:

- [Port Control](#)
- [Port Status](#) on Page 68
- [Rate Control](#) on Page 70
- [Port Trunking](#) on Page 71

Optionally, you can use the CLI for configuration, see [Port Configuration \(CLI\)](#) on Page 154.

Port Control

The *Port Control* page allows you to enable/disable port state, or configure the port auto-negotiation, speed, duplex, and flow control.

Select the port you want to configure and make changes to the port. The following table provides information about the different port control options.

Note: *If both ends are not at the same speed, they cannot link with each other. If both ends are not in the same duplex mode, they are connected by half-duplex mode.*

Port Control

Port	State	Speed/Duplex	Flow Control	Description
1	Enable ▾	AutoNegotiation ▾	Disable ▾	
2	Enable ▾	AutoNegotiation ▾	Disable ▾	
3	Enable ▾	AutoNegotiation ▾	Disable ▾	
4	Enable ▾	AutoNegotiation ▾	Disable ▾	
5	Enable ▾	AutoNegotiation ▾	Disable ▾	
6	Enable ▾	AutoNegotiation ▾	Disable ▾	
7	Enable ▾	AutoNegotiation ▾	Disable ▾	
8	Enable ▾	AutoNegotiation ▾	Disable ▾	
9	Enable ▾	AutoNegotiation ▾	Disable ▾	
10	Enable ▾	AutoNegotiation ▾	Disable ▾	

Port Configuration Page	
State	You can enable or disable the state of this port. Once you click Disable , the port stops to link to the other end and stops to forward any traffic. The default setting is Enable which means all the ports are workable when you receive the ES7510-XT.
Speed/Duplex	You can configure port speed and duplex mode of each port. Below are the selections you can choose: <ul style="list-style-type: none"> • Fast Ethernet Ports 1~ 8 <ul style="list-style-type: none"> - Auto Negotiation (default) - 10M full-duplex (10 Full) - 10M half-duplex (10 Half) - 100M full-duplex (100 Full) - 100M half-duplex (100 Half) • Gigabit Ethernet Port 9~ 10 <ul style="list-style-type: none"> - Auto Negotiation (default) - 10M full-duplex (10 Full) - 10M half-duplex (10 Half) - 100M full-duplex (100 Full) - 100M half-duplex (100 Half) - 1000M full-duplex (1000 Full)
Flow Control	Enable means that you need to activate the flow control function of the remote network device in order to let the flow control of that corresponding port on the switch to work. Disable (default) means that you do not need to activate the flow control function of the remote network device, as the flow control of that corresponding port on the switch works.
Description	Click this field if you want to enter a port description.
Apply	Click Apply to apply the settings. Note: You must Save the settings (Page 134), if you want to maintain these settings if the ES7510-XT is powered off.

Port Status

The *Port Status* page displays the current port status, including Small Form Factory (SFP) fiber transceivers with Digital Diagnostic Monitoring (DDM) functionality that provides real time information of SFP transceiver and allows you to diagnose the optical fiber signal received and launched.

Port Status Page	
Link	Shows link status; Up means the link is up and Down means that the link is down.
State	Shows the port state. If the state is enabled it displays Enable . If the port is disabled or shutdown, it displays Disable .
Speed/Duplex	Current working status of the port.
Flow Control	The state of the flow control.
SFP Vendor	Vendor name of the SFP transceiver that is plugged into the SFP port or ports.
Wavelength	The wave length of the SFP transceiver that is plugged into the SFP port or ports.
Distance	The distance of the SFP transceiver that is plugged into the SFP port or ports.
SFP Scan/ Eject	You can choose from these options: <ul style="list-style-type: none"> • Scan: Scan the SFP transceiver and display the information. • Eject: Eject the SFP transceiver that you have selected. You can eject one port or eject all by click the Eject All button.
SFP DDM	When you select, enable, this scans a SFP DDM transceiver and displays the information.
SFP Scan/ Eject	Click the Scan / Eject button to scan or safely remove the SFP.
SFP DDM	Click the Enable / Disable button to enable or disable the SFP DDM function.
Temperature	Displays the current temperature detected and acceptable temperature range for the DDM SFP transceiver.
Tx Power (dBm)	Displays the current transmit power detected and acceptable Tx power range for the DDM SFP transceiver.
Rx Power (dBm)	Displays the current received power and acceptable Rx power range for the DDM SFP transceiver.
Reload	Click to reload the port status.
Scan All	Click the Scan All button to scan for all SFPs.
Eject All	You can eject one or all of the DDM SFP transceivers. To eject all of the SFPs, click Eject All .

Port Status

Port	Link	State	Speed/Duplex	Flow Control	SFP Vendor	Wavelength	Distance
1	Up	Enable	100 Full	Disable	---	---	---
2	Down	Enable	---	Disable	---	---	---
3	Down	Enable	---	Disable	---	---	---
4	Down	Enable	---	Disable	---	---	---
5	Down	Enable	---	Disable	---	---	---
6	Down	Enable	---	Disable	---	---	---
7	Down	Enable	---	Disable	---	---	---
8	Down	Enable	---	Disable	---	---	---
9	Down	Enable	---	Disable	---	---	---
10	Down	Enable	---	Disable	---	---	---

SFP DDM

Port	SFP Scan/Eject	SFP DDM	Temperature (degree)		Tx Power (dBm)		Rx Power (dBm)	
			Current	Range	Current	Range	Current	Range
9	---	Enable	---	---	---	---	---	---
10	---	Enable	---	---	---	---	---	---

Rate Control

Rate limiting is a form of flow control used to enforce a strict bandwidth limit at a port. You can program separate transmit (Egress Rule) and receive (Ingress Rule) rate limits at each port, and even apply the limit to certain packet types as described below.

Rate Control

Port	Ingress Rule		Egress Rule	
	Packet Type	Rate (Kbps)	Packet Type	Rate (Kbps)
1	Broadcast Only <input type="button" value="v"/>	<input type="text" value="8000"/>	All	<input type="text" value="0"/>
2	Broadcast Only <input type="button" value="v"/>	<input type="text" value="8000"/>	All	<input type="text" value="0"/>
3	Broadcast Only <input type="button" value="v"/>	<input type="text" value="8000"/>	All	<input type="text" value="0"/>
4	Broadcast Only <input type="button" value="v"/>	<input type="text" value="8000"/>	All	<input type="text" value="0"/>
5	Broadcast Only <input type="button" value="v"/>	<input type="text" value="8000"/>	All	<input type="text" value="0"/>
6	Broadcast Only <input type="button" value="v"/>	<input type="text" value="8000"/>	All	<input type="text" value="0"/>
7	Broadcast Only <input type="button" value="v"/>	<input type="text" value="8000"/>	All	<input type="text" value="0"/>
8	Broadcast Only <input type="button" value="v"/>	<input type="text" value="8000"/>	All	<input type="text" value="0"/>
9	Broadcast Only <input type="button" value="v"/>	<input type="text" value="8000"/>	All	<input type="text" value="0"/>
10	Broadcast Only <input type="button" value="v"/>	<input type="text" value="8000"/>	All	<input type="text" value="0"/>

Rate Control Page	
Ingress Rule (Kbps)	Ingress rate in Kbps, the rate range is from 70 Kbps to 1000000 Kbps and zero means no limit. The default value is no-limit.
Egress Rule (Kbps)	Egress rate in Kbps, the rate range is from 70 Kbps to 1000000 Kbps and zero means no limit. The default value is no-limit. Egress rate limiting has an effect on all types of packet types, including Unknown Unicast, Multicast, and Broadcast.
Apply	Click Apply to apply the settings. Note: You must Save the settings (Page 134), if you want to maintain these settings if the ES7510-XT is powered off.

Port Trunking

Port Trunking allows you to group multiple Ethernet ports in parallel to increase link bandwidth. The aggregated ports can be viewed as a physical port that has a bandwidth equal to the combined bandwidth of each trunked port. The member ports of the same trunk group can balance the loading and backup for each other. The Port Trunking feature is usually used when you need higher bandwidth for the network backbone. This is an inexpensive way for you to transfer more data.

The aggregated ports can interconnect to the another switch that also supports Port Trunking. Control supports two types of port trunking:

- Static Trunk
- IEEE 802.3ad

There are some different descriptions for the port trunking. Different manufacturers may use different descriptions for their products, like Link Aggregation Group (LAG), Link Aggregation Control Protocol, Ethernet Trunk, or Ether Channel.

When the other end uses IEEE 802.3ad LACP, you should assign IEEE 802.3ad LACP to the trunk. When the other end uses non-802.3ad, you can then use Static Trunk.

There are two pages for port trunking, [Aggregation Setting](#) on Page 72 and [Aggregation Information](#) on Page 73.

Aggregation Setting

Use the *Port Trunk - Aggregation Setting* page to set up port trunking.

Port Trunk - Aggregation Setting Help

Aggregation Setting

Port	Group ID	Trunk Type
1	0 ▾	▾
2	0 ▾	▾
3	0 ▾	▾
4	0 ▾	▾
5	0 ▾	▾
6	0 ▾	▾
7	0 ▾	▾
8	0 ▾	▾
9	0 ▾	▾
10	0 ▾	▾

Apply
Reload

Aggregation Setting Page	
Group ID	Group ID is the ID for the port trunking group. Ports with same group ID are in the same group.
Trunk Type	Static or 802.3ad LACP . Each trunk group can only support Static or 802.3ad LACP . Non-active ports cannot be setup here.
Apply	Click Apply to apply the settings. <i>Note: You must Save the settings (Page 134), if you want to maintain these settings if the ES7510-XT is powered off.</i>

Aggregation Information

The *Port Trunk - Aggregation Information* page shows the status of port aggregation. Once the aggregation ports are negotiated, you see the following status.

Port Trunk - Aggregation Information

Group ID	Type	Aggregated Ports	Individual Ports	Link Down Ports
1	N/A			
2	N/A			
3	N/A			
4	N/A			
5	N/A			
6	N/A			
7	N/A			
8	N/A			

Aggregation Status Page	
Group ID	Displays Trunk 1 to Trunk 5 set up.
Type	The Type is Static or LACP . Static means that LACP is disabled and configured statically by the Administrator.
Aggregated Ports	When LACP links, you can see the member ports in the Aggregated column.
Individual Ports	When LACP is enabled, member ports of LACP group that are not connected to the correct LACP member ports are displayed in the Individual column.
Link Down Ports	When LACP is enabled, member ports of LACP group that are not linked up are displayed in the Link Down column.
Reload	Click Reload to reload aggregation settings.

Power over Ethernet

Power over Ethernet is one of the key features of the ES7510-XT. The ES7510-XT is IEEE 802.3af and IEEE 802.3at compliant. The ES7510-XT supports up to eight PoE injector ports, each port with the ability to deliver 30W of power.

The following pages are included in this section:

- [PoE Control](#)
- [PoE Scheduling](#) on Page 77
- [PoE Status](#) on Page 78

PoE Control

In WiMax systems, wireless applications, and high-end PoE applications, there are various types of powered devices (PDs). To be compatible with different PDs, the ES7510-XT is designed with four powering modes, including:

- IEEE 802.3af mode
- IEEE 802.3at 2-event mode
- IEEE 802.3at LLDP classification mode
- Forced powering mode to meet any PD type

The ES7510-XT supports **Managed** and **Unmanaged Power Budget** modes.

- **Managed Power Budget** mode: If you select **Managed** for the **Power Budget**, the ES7510-XT uses port-based rules and priorities to manage PoE output power budget.
- **Unmanaged Power Budget** mode: If you select **Unmanaged** for the **Power Budget**, the ES7510-XT disables rules and system controls. The **Power Budget** fields are disabled.

IEEE 802.3at LLDP provides smart power budget control behavior to fulfill the needs of higher end setups requiring exact high power delivery. By using the ongoing dynamic re-negotiation function of the IEEE 802.3at LLDP, the ES7510-XT can perform more intelligently by dynamically reallocating power to the PDs. The ES7510-XT implements the 2 event and Link Layer Discovery Protocol (LLDP) PoE into the system for efficient power budget negotiation between the PSE and the PDs.

The ES7510-XT also provides PD Status Detection. This provides automatic detection of a remote device powered by the ES7510-XT. If the remote system crashes or is unstable, the ES7510-XT performs a system reboot by turning off and on again to trigger the remote device.



DO NOT TOUCH THE DEVICE
SURFACE DURING PoE OPERATION
- HIGH POWER FEEDING.

*If **Forced** mode is selected, power is provided even if no Ethernet cable is plugged in. Only use **Forced** mode if you are attaching a device that is capable of receiving power through its Ethernet connection.*

You can use these steps to configure PoE settings. Refer to the figure and the following table if you need more detailed information.

1. Select **Enable** in the **PoE System** drop list.
2. Select the appropriate **Power Budget** method.
 - **Managed**, which uses port-based rules and priorities to manage PoE output power budget
 - **Unmanaged**, which disables the rules and system controls.
 - a. *Managed Power Budget*: Enter the **Budget (W)** for Power 1 (PWR1) and/or Power 2 (PWR2).
 - b. *Managed Power Budget*: If necessary, change the PWR1 and/or PWR2 power **Voltage** to reflect the power supply voltage.
 - c. *Managed Power Budget*: Set a **Power Budget Warning Level** so that the ES7510-XT sends a warning event. See [SysLog Configuration](#) on Page 124 or [SMTP Configuration](#) on Page 125 for more information.
3. Click **Apply**.
4. Select **Enable** for the port or ports that you want to use as PoE ports.

*Note: If you select **Schedule**, you must also configure the port or ports using [PoE Scheduling](#) on Page 77.*
5. Select the appropriate **Powering Mode (802.3af, 802.3at(LLDP), 802.3at(2 event), or Force** for the PD that you plan on attaching to the corresponding port.
6. Enter a valid **Power Budget** for the port
7. Select an appropriate **Power Priority (Critical, High, or Low)**.

*Note: If the **Power Budget** is **Unmanaged** then this value is ignored.*
8. Click **Apply**.
9. If desired, set up **PD Status Detection**.
10. You must **Save** the settings ([Page 134](#)), if you want maintain these settings if the ES7510-XT is powered off.

PoE Control Help

System Configuration

PoE System Enable ▼

Power Budget Mode Managed ▼

Power 1 Settings	
Budget(W)	120
Voltage(V)	48
Power 2 Settings	
Budget(W)	120
Voltage(V)	50
System Warning	
Power Budget Warning Level(%)	90

Apply Cancel

Port Configuration

Port	Mode	Powering Mode	Budget(W)	Priority
1	Enable	802.3af	15.4	Critical
2	Enable	802.3at(2-Event)	32.0	High
3	Schedule	802.3at(LLDP)	30	Low
4	Enable	802.3af	32.0	Critical
5	Disable	802.3at(2-Event)	32.0	Critical
6	Disable	802.3at(LLDP)	32.0	Critical
7	Enable	802.3at(LLDP)	32.0	Critical
8	Disable	802.3af	32.0	Critical


Apply Cancel

PD Status Detection


Enable PD Status Detection

PD	IP Address	Cycle Time(s)	Delete
1	10.0.0.222	3600	<input type="checkbox"/>
2			<input type="checkbox"/>
3			<input type="checkbox"/>
4			<input type="checkbox"/>
5			<input type="checkbox"/>
6			<input type="checkbox"/>
7			<input type="checkbox"/>
8			<input type="checkbox"/>

Apply Cancel

PoE Control	
PoE System	
Power Budget	Enables or disables the ES7510-XT PoE functionality. The output power range is 0-120W. This budget must less than the input power. 0 is the default, which disables PoE functionality.
Budget (W)	The maximum output budget on the power supply. Both power budgets for PWR1 and PWR2 are aggregated.
Voltage (V)	This is the voltage applied to the power supply. Typically, you should use the same value for PWR1 and PWR2, otherwise the ES7510-XT draws more current from the power supply with the highest voltage.
Power Budget Warning Level	If the power utilization is more than the warning level, the ES7510-XT sends a warning event. The range is 0-100%. 0 is disabled.
Port Configuration	
Mode	You can select Disable , Enable , or Schedule for the PoE mode for each port. Select Schedule to enable the port in the <i>PoE Schedule</i> page (Page 77).
Powering Mode	Use this mode to change the Powering Mode to one of the following: <ul style="list-style-type: none"> 802.3af If the PD follows IEEE 802.3af, then the ES7510-XT delivers power. 802.3at(LLDP) Delivers power to a PD that supports IEEE 802.3at LLDP. 802.3at(2-Event) Delivers power to a PD that supports 2-Event. Force If Force is enabled, the port directly delivers the power even if there is no Ethernet cable connected. <p><i>Note: Use caution when using Force mode. Do not connect a standard Ethernet device if using Force mode, it will damage the device.</i></p> 
Budget (W)	A limit to the power supply output. The range is from 0.44-35W when Manual Mode is selected. A pop-up warning message appears when the PoE port setting is over the system power supply output ability.
Power Priority	Power Priority lets the PoE port with higher priority to deploy power under the limit power budget. There are three priorities (Critical , High and Low).
PD Status Detection	
PD Status Detection	Enable/Disable the PD Status Detection function.
IP Address	Type in the IP address that you want to detect.
Cycle Time(s)	This is the gap per detection in seconds. The range is 10-3600 seconds in multiples of 10.
Apply	Click Apply to apply the settings. <i>Note: You must Save the settings (Page 134), if you want maintain these settings if the ES7510-XT is powered off.</i>

The following illustrates how to configure IEEE 802.3at LLDP. Assume the PD is ready for the configuration for IEEE 802.3at LLDP, you only need to confirm the ES7510-XT configuration.

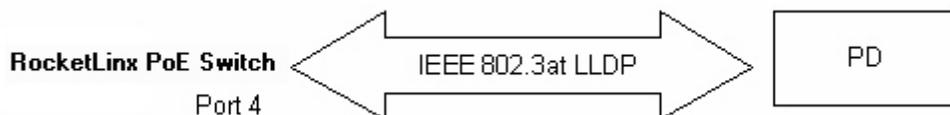

For example, connect the port of the ES7510-XT to the PD (Port 4), set **PoE Mode** is **Enable** and **Powering Mode** is **802.3at(LLDP)**. When the ES7510-XT and the PD are ready to IEEE 802.3at LLDP, IEEE 802.3at LLDP starts operation. Refer to [PoE Status](#) on Page 78, to see the **PoE Status** page.

PoE Scheduling

The PoE Scheduling control is a powerful function to help you save power and money.

You can schedule a PoE port after the **PoE Mode** has been set to **Schedule** in the *PoE Control* page.

Select **Enable** and the port in the **PoE Schedule** in the drop list for any ports you want to schedule. Click the time blocks that you want to enable the PoE port and click **Apply**.

PoE Schedule

[Help](#)

PoE Schedule Disable ▾ on Port 1 ▾

Time	Sunday	Monday	Tuesday	Wednesday	Thursday	Friday	Saturday
00:00	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
01:00	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
02:00	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
03:00	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
04:00	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
05:00	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
06:00	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
07:00	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>				
08:00	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>				
09:00	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>				
10:00	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>				
11:00	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>				
12:00	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>				
13:00	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>				
14:00	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>				
15:00	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>				
16:00	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>				
17:00	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
18:00	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
19:00	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
20:00	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
21:00	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
22:00	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
23:00	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

[Apply](#)

[Cancel](#)

[Reload](#)

PoE Status

The *PoE Status* page shows the operating status of each PoE port.

Note: The Primary Power is determined by the voltage configured for PoE. If the voltage for both power supplies is the same, then both power supplies are listed as the Primary Power.

You can use the *PoE Control* page ([Page 74](#)) if you need to make any changes.

PoE Status

Power 1	48 V, Budget 120 W
Power 2	50 V, Budget 120 W
Primary Power	PWR2
Secondary Power	PWR1
Total Power Budget	120 W
Total Output Power	8.4 W
Power Budget Warning Level	90 %
Utilization	7 %
Event	Normal

Port	Mode	Status	Class	Budget(w)	Consumption(W)	Voltage(V)	Current (mA)
1	Disable	Off	---	---	0.0	0.0	0
2	Disable	Off	---	---	0.0	0.0	0
3	Disable	Off	---	---	0.0	0.0	0
4	Disable	Off	---	---	0.0	0.0	0
5	Disable	Off	---	---	0.0	0.0	0
6	Disable	Off	---	---	0.0	0.0	0
7	Enable	Powering	Class4	32.0	8.4	48.3	176
8	Disable	Off	---	---	0.0	0.0	0

Network Redundancy

It is critical for industrial applications that the network remains running at all times. The ES7510-XT supports:

- *Standard Rapid Spanning Tree Protocol (STP) and Rapid Spanning Tree Protocol (RSTP)*
The ES7510-XT supports RSTP versions IEEE 802.1D-2004, IEEE 802.1D-1998 STP, and IEEE 802.1w RSTP.
- *Multiple Spanning Tree Protocol (MSTP)*
MSTP implements IEEE 802.1s, which uses RSTP for rapid convergence, enables VLANs to be grouped into a spanning-tree instance, with each instance having a spanning-tree topology independent of other spanning-tree instances. This architecture provides multiple forwarding paths for data traffic, enables load balancing, and reduces the number of spanning-tree instances required to support a large number of VLANs. MSTP was originally defined in the IEEE 802.1s and later merged into the IEEE 802.1Q-2003 specification.
- *Redundant Ring*
The Redundant Ring features 0 ms for restore and less than 5 ms for fail over for copper.
- *Rapid Dual Homing (RDH)*
Advanced RDH technology allows the ES7510-XT to connect with a core managed switch easily. With RDH technology, you can also couple several Rapid Super Rings or RSTP groups together, which is also known as Auto Ring Coupling.

The following pages are included in this group:

- [STP Configuration](#) on Page 80
- [STP Port Configuration](#) on Page 81
- [STP Information](#) on Page 82
- [MSTP Configuration](#) on Page 84
- [MSTP Port Configuration](#) on Page 86
- [MSTP Information](#) on Page 87
- [Redundant Ring](#) on Page 89
- [Redundant Ring Information](#) on Page 91
- [Loop Protection](#) on Page 92

Optionally, you can use the CLI to configure these features, see [Network Redundancy \(CLI\)](#) on Page 162.

STP Configuration

This page allows you to select the STP mode and configure the global STP/RSTP bridge configuration. Spanning Tree Protocol (STP; IEEE 802.1D) provides a loop-free topology for any LAN or bridged network.

Rapid Spanning Tree Protocol (RSTP; IEEE 802.1w) is an evolution of the Spanning Tree Protocol (STP), and was introduced with the IEEE 802.1w standard, and provides faster spanning tree convergence after a topology change. In most cases, IEEE 802.1w can also revert back to IEEE 802.1D in order to interoperate with legacy bridges on a per-port basis. The new edition of the IEEE 802.1D standard, IEEE 802.1D-2004, incorporates the IEEE 802.1t-2001 and IEEE 802.1w standards.

Multiple Spanning Tree Protocol (MSTP; IEEE 802.1s) which uses RSTP for rapid convergence, enables VLANs to be grouped into a spanning-tree instance, with each instance having a spanning-tree topology independent of other spanning-tree instances. This architecture provides a loop-free topology with load balancing while reducing the number of spanning-tree instances required to support a large number of VLANs. MSTP was originally defined in the IEEE 802.1s and later merged into the IEEE 802.1Q-2003 specification.

STP Configuration Help

STP Mode Disable ▼

Bridge Configuration

Bridge Address	<input type="text"/>
Bridge Priority	<input type="text" value="0"/> ▼
Max Age	<input type="text" value="6"/> ▼
Hello Time	<input type="text" value="1"/> ▼
Forward Delay	<input type="text" value="4"/> ▼

Apply
Cancel

STP Configuration Page	
STP Mode	Select the spanning tree protocol: STP, RSTP or MSTP or disable STP.
Bridge Configuration	
Bridge Address	A value used to identify the bridge. This item cannot be modified.
Bridge Priority	A value used to identify the bridge. The bridge with the lowest value has the highest priority and is selected as the root. Enter a number 0 through 61440 in increments of 4096.
Max Age (See Note)	The number of seconds a bridge waits without receiving Spanning-Tree Protocol configuration messages before attempting to reconfigure. Enter a number of 6 - 40.
Hello Time (See Note)	The number of seconds between the transmissions of Spanning-Tree Protocol configuration messages. Enter a number of 1 through 10.
Forward Delay (See Note)	The number of seconds a port waits before changing from its Spanning-Tree Protocol learning and listening states to the forwarding state. Enter a number 4 - 30.
Apply	Click Apply to apply the settings. Note: You must Save the settings (Page 134), if you want to maintain these settings if the ES7510-XT is powered off.
Note: $2 * (\text{Forward Delay Time} - 1)$ should be greater than or equal to the Max Age. The Max Age should be greater than or equal to $2 * (\text{Hello Time} + 1)$.	

STP Port Configuration

This page allows you to configure the port parameter after you have enabled STP, RSTP, or MSTP.

STP Port Configuration

Port	STP State	Path Cost	Port Priority	Link Type	Edge Port
1	Enable ▾	200000	128 ▾	Auto ▾	Enable ▾
2	Enable ▾	200000	128 ▾	Auto ▾	Enable ▾
3	Enable ▾	200000	128 ▾	Auto ▾	Enable ▾
4	Enable ▾	200000	128 ▾	Auto ▾	Enable ▾
5	Enable ▾	200000	128 ▾	Auto ▾	Enable ▾
6	Enable ▾	200000	128 ▾	Auto ▾	Enable ▾
7	Enable ▾	200000	128 ▾	Auto ▾	Enable ▾
8	Enable ▾	200000	128 ▾	Auto ▾	Enable ▾
9	Enable ▾	200000	128 ▾	Auto ▾	Enable ▾
10	Enable ▾	200000	128 ▾	Auto ▾	Enable ▾

STP Port Configuration Page	
STP State	You can enable/disable STP/RSTP/MSTP on a port by port basis. You can disable the STP state when connecting a device in order to avoid STP waiting periods.
Path Cost	The cost of the path to the other bridge from this transmitting bridge at the specified port. Enter a number from 1 through 200000000.
Port Priority	Decide which port should be blocked by priority on your LAN. Enter a number from 0 - 240 in increments of 16.
Link Type	Some of the rapid state transactions that are possible within RSTP are dependent upon whether the port in question is connected to exactly one other bridge (that is, it is served by a point-to-point LAN segment), or if it is connected to two or more bridges (that is., it is served by a shared medium LAN segment). This configuration allows the p2p status of the link to be controlled by an administrator.
Edge Port	Present in implementations that support the identification of edge ports. All ports directly connected to end stations cannot create bridging loops in the network and can thus directly transition to forwarding, and skipping the listening and learning stages. When a non-bridge device connects an edge port, this port is in a blocking state and turn to forwarding state in 2*Hello Time seconds. When the bridge device connects an edge port, this port is a non-edge port automatic.
Apply	Click Apply to apply the settings. Note: You must Save the settings (Page 134), if you want to maintain these settings if the ES7510-XT is powered off.

STP Information

The *STP Information* page allows you to see the ES7510-XT root information and port status.

STP Information

Root Information

Root Address	00c0.4e2c.006c
Root Priority	32768
Root Port	10
Root Path Cost	220000
Max Age	20 second(s)
Hello Time	2 second(s)
Forward Delay	15 second(s)

Port Information

Port	Role	Port State	Path Cost	Port Priority	Link Type	Edge Port	Aggregated(ID/Type)
1	Disabled	Disabled	200000	128	P2P	Edge	/
2	Disabled	Disabled	200000	128	P2P	Edge	/
3	Disabled	Disabled	200000	128	P2P	Edge	/
4	Disabled	Disabled	200000	128	P2P	Edge	/
5	Disabled	Disabled	200000	128	P2P	Edge	/
6	Disabled	Disabled	200000	128	P2P	Edge	/
7	Disabled	Disabled	200000	128	P2P	Edge	/
8	Disabled	Disabled	200000	128	P2P	Edge	/
9	Disabled	Disabled	20000	128	P2P	Edge	/
10	Root	Forwarding	20000	128	P2P	Non-Edge	/

STP Information Page

Root Information

Root Address	Root bridge address, which is the bridge with the smallest (lowest) bridge ID.
Root Priority	Root bridge priority, the bridge with the lowest value has the highest priority and is selected as the root.
Root Port	Root port of this bridge.
Root Path Cost	Root path cost.
Max Age	The number of seconds a bridge waits without receiving Spanning-Tree Protocol configuration messages before attempting to reconfigure.
Hello Time	The number of seconds between the transmissions of Spanning-Tree Protocol configuration messages.
Forward Delay	The number of seconds a port waits before changing from its Spanning-Tree Protocol learning and listening states to the forwarding state.

STP Information Page (Continued)	
Port Information	
Role	Descriptive information about the STP/RSTP switch port role. Role: Root, Designated, Alternate, Backup, Disabled, Unknown.
Port State	Descriptive information about the STP/RSTP switch port state. State: Blocking, Listening, Learning, Forwarding, Disabled, Unknown.
Path Cost	The cost of the path to the other bridge from this transmitting bridge at the specified port. Path cost range is 1 through 200000000.
Port Priority	Decide which port should be blocked by priority in your LAN. Range is 0 through 240 in increments of 16.
Link Type	Operational link type. Some of the rapid state transactions that are possible within RSTP are dependent upon whether the port in question can be concerned to exactly one other bridge (that is, it is served by a point-to-point LAN segment), or can be connected to two or more bridges (that is, it is served by a shared medium LAN segment).
Edge Port	Operational edge port state. Present in implementations that support the identification of edge ports. All ports directly connected to end stations cannot create bridging loops in the network and can thus directly transition to forwarding, skipping the listening and learning stages. When the non-bridge device connects an edge port, this port is in blocking state and turn to forwarding state in 2*Hello Time seconds. When the bridge device connects an edge port, this port is a non-edge port automatic.
Aggregated (ID/Type)	This is the aggregated port information. The ID is the aggregation ID (Trunk ID) and the Type is either Static or LACP.
Reload	Click the Reload button to reload STP information.

MSTP Configuration

Multiple Spanning Tree Protocol (MSTP) is a direct extension of RSTP. It can provide an independent spanning tree for different VLANs. It simplifies network management, creates a faster convergence than RSTP by limiting the size of each region, and prevents VLAN members from being segmented from the rest of the group (as sometimes occurs with IEEE 802.1D STP).


While using MSTP, there are some new concepts of network architecture. A switch may belong to different groups, act as root or designate switch, or generate BPDUs for the network to maintain the forwarding table of the spanning tree. MSTP can also provide load balancing between switches.

One VLAN can be mapped to a Multiple Spanning Tree Instance (MSTI). The maximum number of instances that the ES7510-XT supports is 16, with a range from 0-15. The MSTP builds a separate Multiple Spanning Tree (MST) for each instance to maintain connectivity among each of the assigned VLAN groups. An Internal Spanning Tree (IST) is used to connect all the MSTP switches within an MST region. An MST Region may contain multiple MSTP instances.

The following figure shows a MSTP instance with two VLANs. Each instance has a root node and forwarding paths.

A Common Spanning Tree (CST) interconnects all adjacent MST regions and acts as a virtual bridge node for communications with STP or RSTP nodes in the global network. MSTP connects all bridges and LAN segments with a single Common Internal Spanning Tree (CIST). The CIST is formed as a result of the running spanning tree algorithm between switches that support the STP, RSTP, or MSTP protocols.

The following diagram shows a CST attached to a larger network. In this network, a Region may have different instances and its own forwarding path and table, however, the CST acts as a single bridge.

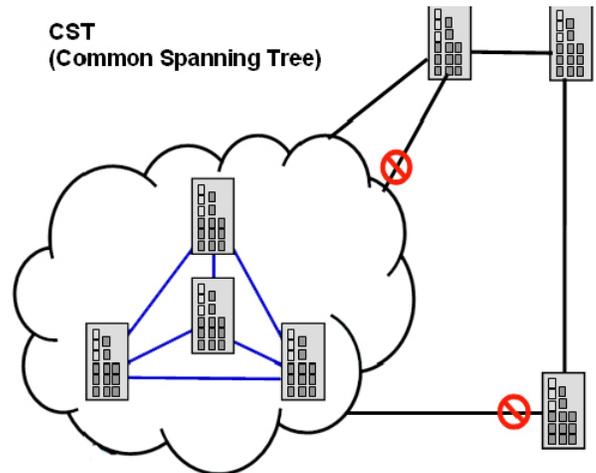

This is the *MSTP Configuration* page.

MSTP Configuration Help

MSTP Region Configuration

Region Name

Revision

Apply

Add MSTP Instance

Instance ID

VLAN Group

Instance Priority

Add

MSTP Instance Configuration

Instance ID	VLAN Group	Instance Priority

Apply

MSTP Configuration Page	
MST Region Configuration	
Region Name	A name used to identify the MST Region. Maximum length: 32 characters.

MSTP Configuration Page (Continued)	
Revision	A value used to identify the MST Region. Range: 0-65535; Default: 0).
Apply	Click the Apply button to apply the MST Region Configuration .
New MST Instance	
Instance ID	A value used to identify the MST instance, valid value are 1 through 15. Instance 0 (CIST, Common Internal Spanning Tree) is a special instance of spanning-tree known as IST or Internal Spanning Tree (=MSTI00).
VLAN Group	Give a VLAN group to map this MST instance. Use a VLAN number (for example, 10), range (for example:1-10) or mixing format (for example: 2,4,6,4-7,10).
Instance Priority	A value used to identify the MST instance. The MST instance with the lowest value has the highest priority and is selected as the root. Enter a number 0 through 61440 in increments of 4096.
Add	Click the Add button to add the New MST Instance .
Current MST Instance Configuration	
Instance ID	A value used to identify the MST instance. Instance 0 (CIST, Common Internal Spanning Tree) is a special instance of spanning-tree known as IST or Internal Spanning Tree (=MSTI00).
VLAN Group	Provide a VLAN group to map this MST instance. Use the VLAN number, for example: 10. You can set a range, for example: 1-10) or set specific VLANs, for example: 2,4,6,4-7.
Instance Priority	A value used to identify the MST instance. The MST instance with the lowest value has the highest priority and is selected as the root. Enter a number 0 through 61440 in increments of 4096.
Apply	Click the Apply button to apply the current MST instance configuration . Note: You must Save the settings (Page 134), if you want to maintain these settings if the ES7510-XT is powered off.

MSTP Port Configuration

This page allows you to configure the port settings. Choose the Instance ID that you want to configure.

MSTP Port Configuration Help

Instance ID 0 ▼

Port	Path Cost	Port Priority	Link Type	Edge Port
1	<input type="text"/>	<input type="text" value="▼"/>	<input type="text" value="▼"/>	<input type="text" value="▼"/>
2	<input type="text"/>	<input type="text" value="▼"/>	<input type="text" value="▼"/>	<input type="text" value="▼"/>
3	<input type="text"/>	<input type="text" value="▼"/>	<input type="text" value="▼"/>	<input type="text" value="▼"/>
4	<input type="text"/>	<input type="text" value="▼"/>	<input type="text" value="▼"/>	<input type="text" value="▼"/>
5	<input type="text"/>	<input type="text" value="▼"/>	<input type="text" value="▼"/>	<input type="text" value="▼"/>
6	<input type="text"/>	<input type="text" value="▼"/>	<input type="text" value="▼"/>	<input type="text" value="▼"/>
7	<input type="text"/>	<input type="text" value="▼"/>	<input type="text" value="▼"/>	<input type="text" value="▼"/>
8	<input type="text"/>	<input type="text" value="▼"/>	<input type="text" value="▼"/>	<input type="text" value="▼"/>
9	<input type="text"/>	<input type="text" value="▼"/>	<input type="text" value="▼"/>	<input type="text" value="▼"/>
10	<input type="text"/>	<input type="text" value="▼"/>	<input type="text" value="▼"/>	<input type="text" value="▼"/>

Apply Cancel

MSTP Port Configuration Page	
Instance ID	Select an Instance ID to display and modify MSTP instance setting.
Port Configuration	
Path Cost	The cost of the path to the other bridge from this transmitting bridge at the specified port. Enter a number from 1 through 200000000.
Port Priority	Decide which port should be blocked by priority on your LAN. Enter a number from 0 through 240 in increments of 16.
Link Type	Some of the rapid state transactions that are possible within RSTP are dependent upon whether the port in question is connected to exactly one other bridge (that is, it is served by a point-to-point LAN segment), or if it's connected to two or more bridges (that is, it is served by a shared medium LAN segment). This configuration allows the p2p status of the link to be controlled by an administrator.
Edge Port	Present in implementations that support the identification of edge ports. All ports directly connected to end stations cannot create bridging loops in the network and can thus directly transition to forwarding, and skipping the listening and learning stages. When the non-bridge device connects an edge port, this port is in a blocking state and turn to forwarding state in 2*Hello Time seconds. When the bridge device connects an edge port, this port is a non-edge port automatic.
Apply	Click the Apply button to apply the configuration. <i>Note:</i> You must Save the settings (Page 134), if you want to maintain these settings if the ES7510-XT is powered off.

MSTP Information

This page allows you to see the current MSTP information. Choose the Instance ID first. If the instance is not added, the information remains blank.

MSTP Information

Instance ID

Root Information

Root Address	
Root Priority	
Root Port	
Root Path Cost	
Max Age	
Hello Time	
Forward Delay	

Port Information

Port	Role	Port State	Path Cost	Port Priority	Link Type	Edge Port
1						
2						
3						
4						
5						
6						
7						
8						
9						
10						

MSTP Information Page	
Instance ID	Select an instance ID to display MSTP instance information. Instance 0 (CIST, Common Internal Spanning Tree) is a special instance of spanning-tree known as IST or Internal Spanning Tree (=MSTI00).
Root Information	
Root Address	Root bridge address, which is the bridge with the smallest (lowest) bridge ID.
Root Priority	Root bridge priority, the bridge with the lowest value has the highest priority and is selected as the root.
Root Port	Root port of this bridge.
Root Path Cost	Root path cost.
Max Age	The number of seconds a bridge waits without receiving Spanning-Tree Protocol configuration messages before attempting to reconfigure.
Hello Time	The number of seconds between the transmissions of Spanning-Tree Protocol configuration messages.
Forward Delay	The number of seconds a port waits before changing from its Spanning-Tree Protocol learning and listening states to the forwarding state.
Port Information	
Port Role	Descriptive information about the MSTP switch port role. Role: Master, Root, Designated, Alternate, Backup, Boundary, Disabled, Unknown.
Port State	Descriptive information about the MSTP switch port state. State: Blocking, Listening, Learning, Forwarding, Disabled, Unknown.
Path Cost	The cost of the path to the other bridge from this transmitting bridge at the specified port. Path cost range is 1 through 200000000.
Port Priority	Decide which port should be blocked by priority in your LAN. The range is 0 through 240 in increments of 16.
Link Type	Operational link type. Some of the rapid state transactions that are possible within MSTP are dependent upon whether the port in question can be concerned to exactly one other bridge (that is, it is served by a point-to-point LAN segment), or can be connected to two or more bridges (that is, it is served by a shared medium LAN segment).
Edge Port	Operational edge port state. Present in implementations that support the identification of edge ports. All ports directly connected to end stations cannot create bridging loops in the network and can thus directly transition to forwarding, skipping the listening and learning stages. When the non-bridge device connects an edge port, this port is in blocking state and turn to forwarding state in 2*Hello Time seconds. When the bridge device connects an edge port, this port is a non-edge port automatic.
Reload	Click the Reload button to reload MSTP instance information.

Redundant Ring

The most common industrial network redundancy is to form a ring or loop. Typically, managed switches are connected in series and the last switch is connected back to the first one. In such connection, you can implement Redundant Ring technology.

Redundant Ring Configuration

Add Ring

Ring ID	0
Name	

Ring Configuration

Ring ID	Name	Version	Device Priority	Ring Port1	Path Cost	Ring Port2	Path Cost	Rapid Dual Homing	Ring Status

Redundant Ring Page	
Ring ID/Name	To create a Redundant Ring select the Ring ID, which has range from 0 to 31. If the name field is left blank, the name of this ring is automatically named with the Ring ID. The maximum number of rings is 32. Note: Once a ring is created, you cannot change it.
Ring Configuration	
Ring ID	Once a Ring is created, the Ring ID appears, and cannot be changed. In multiple ring environments, the traffic can only be forwarded under the same Ring ID. Remember to check the Ring ID when there are more than one ring in existence.
Name	This field shows the name of the Ring. If it is not entered when creating, it is automatically named by the rule <i>RingID</i> .
Version	The version of Ring can be changed here, the choices are Rapid Super Ring or Super Ring .
Device Priority	The switch with highest priority (highest value) is automatically selected as the Ring Master (RM) . When one of the ring ports on this switch becomes a forwarding port and the other one becomes a blocking port. If all of the switches have the same priority, the switch with the highest MAC address is selected as the Ring Master.
Ring Port1	In a Rapid Super Ring environment, you should have two Ring ports. Whether this switch is a Ring Master or not. When configuring Rapid Super Rings , two ports should be selected to be Ring ports. For a Ring Master, one of the Ring Ports becomes the forwarding port and the other one becomes the blocking port.
Path Cost	Change the Path Cost of Ring Port1, if this switch is the Ring Master of a Ring, then it determines the blocking port. The port with higher Path Cost in the two Ring Ports becomes the blocking port. If the Path Cost is the same, the port with larger port number becomes the blocking port.
Ring Port2	Assign another port for ring connection.
Path Cost	Change the Path Cost of Ring Port2.

Redundant Ring Page (Continued)	
Rapid Dual Homing	<p>Rapid Dual Homing is an important feature of Rapid Super Ring redundancy technology. When you want to connect multiple RSR or form redundant topology with other vendors, RDH allows you to have a maximum of seven multiple links for redundancy without any problem.</p> <p>In RDH, you do not need to configure a specific port to connect to other protocol. The RDH selects the fastest link for the primary link and blocks all the other links to avoid a loop. If the primary link failed, RDH automatically forwards the secondary link for a network redundant. If there are more connections, they are standby links and are recovered if both primary and secondary links are broken.</p>
Ring status	To Enable/Disable the Ring, remember to enable the Ring after you add it.
Apply	<p>Click Apply to apply the settings.</p> <p>Note: You must Save the settings (Page 134), if you want to maintain these settings if the <i>ES7510-XT</i> is powered off.</p>

Redundant Ring Information

This page shows Redundant Ring information.

Redundant Ring Information

Ring ID	Version	Role	Status	RM MAC	Blocking Port	Role Transition Count	Ring State Transition Count

Redundant Ring Information Page	
Ring ID	The Ring ID.
Version	Displays the ring version, this field could be Super Ring or Rapid Super Ring.
Role	This ES7510-XT is the RM (Ring Master) or nonRM (non-ring master).
Status	If this field is Normal it means the redundancy is approved. If any one of the link in this Ring is broken, then the status is Abnormal .
RM MAC	The MAC address of Ring Master of this Ring, which helps to find the redundant path.
Blocking Port	Shows which is blocked port of RM.
Role Transition Count	Shows how many times this ES7510-XT has changed its Role from nonRM to RM or from RM to nonRM.
Ring State Transition Count	Shows how many times the Ring status has been transformed between Normal and Abnormal state.
Reload	Click to reload redundant ring information.

Loop Protection

Loop protection prevents broadcast loops in Layer 2 switching configurations.

Loop Protection Help

Transmit Interval 1

Port	Loop Protection	Status
1	Disable	
2	Disable	
3	Disable	
4	Disable	
5	Disable	
6	Disable	
7	Disable	
8	Disable	
9	Disable	
10	Disable	

Apply
Cancel


Loop Protection Page	
Transmit Interval	Loop protection mechanism detection packet transmitting interval 1 ~ 10 seconds (default is 1).
Port	The port ID.
Loop Protection	Enable/Disable loop protection mechanism on port.
Status	The status of loop protection.
Apply	Click Apply to apply the settings. <i>Note: You must Save the settings (Page 134), if you want to maintain these settings if the ES7510-XT is powered off.</i>
Reload	Click the Reload button to reload loop protection information.

VLAN

A Virtual LAN (VLAN) is a logical grouping of nodes for the purpose of limiting a broadcast domain to specific members of a group without physically grouping the members. The VLAN allows you to isolate network traffic so that only members of the VLAN could receive traffic from the same VLAN members. Basically, creating a VLAN from a switch is the logical equivalent of physically reconnecting a group of network devices to another Layer 2 switch, without actually disconnecting these devices from their original switches.

The ES7510-XT supports IEEE 802.1Q VLAN, which is also known as Tag-Based VLAN. This Tag-Based VLAN allows a VLAN to be created across different switches. IEEE 802.1Q tag-based VLAN makes use of VLAN control information stored in a VLAN header attached to IEEE 802.3 packet frames. This tag contains a VLAN Identifier (VID) that indicates which VLAN a frame belongs to. Since each switch only has to check a frame's tag, without the need to dissect the contents of the frame, this saves a lot of computing resources within the ES7510-XT.

The following figure displays an IEEE 802.1Q VLAN.

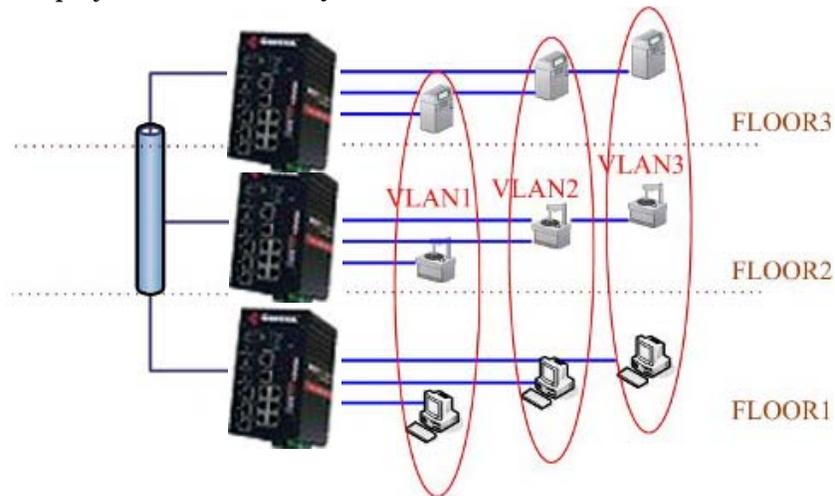

The ES7510-XT supports VLAN tunneling (QinQ), which expands the number of VLANs by adding a tag to the 802.1Q packets. The original VLAN is usually identified as Customer VLAN (C-VLAN) and the new VLAN is Service VLAN(S-VLAN). By adding the additional tag, QinQ increases the possible number of VLANs. After QinQ is enabled, the ES7510-XT can reach up to 256x256 VLANs. With different standard tags, it also improves network security.



VLAN Configuration pages allow you to add and remove a VLAN, configure port Ingress/Egress parameters, and view the VLAN table. The following pages are included in this group:

- [VLAN Configuration](#) on Page 94
- [VLAN Configuration](#) on Page 94
- [VLAN Information](#) on Page 98
- [Private VLAN](#) on Page 99
- [PVLAN Configuration](#) on Page 99

- [PVLAN Port Configuration](#) on Page 100
 - [PVLAN Information](#) on Page 101
 - [GVRP Configuration](#) on Page 102
- Optionally, you can use the CLI for configuration, see [VLAN \(CLI\)](#) on Page 171.

VLAN Configuration

Use this page to assign the Management VLAN, create the static VLAN, and assign the Egress rule for the member ports of the VLAN.

VLAN Configuration Help

Management VLAN ID

Static VLAN

VLAN ID	NAME
<input type="text"/>	<input type="text"/>

Static VLAN Configuration

VLAN ID	Name	1	2	3	4	5	6	7	8	9	10
<input type="checkbox"/> 1	<input type="text" value="VLAN1"/>	<input type="button" value="U"/>									

VLAN Configuration Page	
Management VLAN ID	<p>The management VLAN ID is the VLAN ID of the CPU interface so that only member ports of the management VLAN can ping and access the switch. The default management VLAN ID is 1.</p> <p>Click Apply after you enter the VLAN ID.</p>
Static VLAN	<p>You can assign a VLAN ID and VLAN Name for the new static VLAN.</p> <ul style="list-style-type: none"> • VLAN ID: This is used by the switch to identify different VLANs. A valid VLAN ID is between 1 and 4,094, 1 is the default VLAN. • VLAN Name: This is a reference for the network administrator to identify different VLANs. The VLAN name may up to 12 characters in length. If you do not provide a VLAN name, the system automatically assigns a VLAN name. The rule is VLAN (VLAN ID). <p>Click Add to create a new VLAN. The new VLAN displays in the <i>Static VLAN Configuration</i> table. After creating the VLAN, the status of the VLAN remains Unused, until you add ports to the VLAN.</p> <p>Note: Before changing the management VLAN ID by web or Telnet, remember that the port attached by the administrator should be the member port of the management VLAN; otherwise the administrator cannot access the switch through the network. The ES7510-XT supports a maximum of 256 VLANs.</p>

VLAN Configuration Page (Continued)

Static VLAN Configuration

- **VLAN ID:** The VLAN identifier for this VLAN.
- **Name:** The name of the VLAN.
- **1 - 10:** The corresponding port number on the VLAN.
 - -- Not available
 - **U** Untag, indicates that egress/outgoing frames are not VLAN tagged.
 - **T** Tag, indicates that egress/outgoing frames are LAN tagged.
- Click **Apply** to apply the settings.

*Note: You must **Save** the settings ([Page 134](#)), if you want to maintain these settings if the ES7510-XT is powered off.*
- Click **Remove Selected** to remove the selected static VLAN.
- Click **Reload** to reload static VLAN configuration.

The following figure shows a static VLAN configuration table. Two new VLANs were created (VLAN2 and Test). Egress rules of the ports are not configured.

Static VLAN Configuration

VLAN ID	Name	1	2	3	4	5	6	7	8	9	10
<input type="checkbox"/> 1	VLAN1	U	U	U	U	U	U	U	U	U	U
<input type="checkbox"/> 2	VLAN2	--	--	--	--	--	--	--	--	--	--
<input type="checkbox"/> 3	Test	--	--	--	--	--	--	--	--	--	--

Apply Remove Selected Reload

This figure displays how to configure the Egress rule of the ports.

Use the following steps to configure Egress rules:

1. Assign Egress rule of the ports to **U** or **T**.
2. Press **Apply** to apply the setting.

Static VLAN Configuration

VLAN ID	Name	1	2	3	4	5	6	7	8	9	10
<input type="checkbox"/> 1	VLAN1	U	U	U	U	U	U	U	U	U	U
<input type="checkbox"/> 2	VLAN2	--	--	--	--	--	--	--	--	--	--
<input type="checkbox"/> 3	Test	--	U	--	--	--	--	--	--	--	--

Apply Remove Selected Reload

If you want to remove one VLAN, select the VLAN entry and then click the **Remove** button.

VLAN Port Configuration

The *VLAN Port Configuration* page allows you to configure VLAN port parameters on a specific port. These parameters include the port VLAN ID (PVID), Tunnel Mode, Accept Frame Type and Ingress Filtering.

VLAN Port Configuration Help

Port	PVID	Tunnel Mode	Accept Frame Type	Ingress Filtering
1	1	None	Admit All	Disable
2	1	None	Admit All	Disable
3	1	None	Admit All	Disable
4	1	None	Admit All	Disable
5	1	None	Admit All	Disable
6	1	None	Admit All	Disable
7	1	None	Admit All	Disable
8	1	None	Admit All	Disable
9	1	None	Admit All	Disable
10	1	None	Admit All	Disable

Apply

VLAN Port Configuration Page	
PVID	Enter the port VLAN ID (PVID). The PVID allows the switches to identify which port belongs to which VLAN. To keep things simple, it is recommended that PVID is equivalent to VLAN IDs. The values of PVIDs are from 0 to 4,095 (0 and 4,095 are reserved), 1 is the default value; 2 to 4,094 are valid and available in this column.
Tunnel Mode	<p>None - IEEE 802.1Q tunnel mode is disabled.</p> <p>802.1Q Tunnel: QinQ is applied to the ports which connect to the C-VLAN. The port receives a tagged frame from the C-VLAN. You need to add a new tag (Port VID) as an S-VLAN VID. When the packets are forwarded to the C-VLAN, the S-VLAN tag is removed. After 802.1Q Tunnel mode is assigned to a port, the egress setting of the port should be <i>Untag</i>, it indicates that the egress packet is always untagged. This is configured in the Static VLAN Configuration table (Page 94).</p> <p>802.1Q Tunnel Uplink: QinQ is applied to the ports which connect to the S-VLAN. The port receives a tagged frame from the S-VLAN. When the packets are forwarded to the S-VLAN, the S-VLAN tag is kept. After 802.1Q Tunnel Uplink mode is assigned to a port, the egress setting of the port should be <i>Tag</i>, it indicates that the egress packet is always tagged. This is configured in the Static VLAN Configuration table (Page 94). For example, if the VID of S-VLAN/Tunnel Uplink is 10, the VID of C-VLAN/Tunnel is 5. The 802.1Q Tunnel port receives Tag 5 from C-VLAN and adds Tag 10 to the packet. When the packets are forwarded to S-VLAN, Tag 10 is kept.</p>
Accept Frame Type	<p>This defines the accepted frame type of the port. There are two modes you can select:</p> <ul style="list-style-type: none"> • Admit All mode means that the port can accept both tagged and untagged packets. When you select Admit All, untagged frames or Priority-Tagged only frames received on this port are accepted and assigned to the PVID for this frame. This control does not affect VLAN independent BPDU frames, such as Super Ring, STP, GVRP and LACP. It does affect VLAN dependent BPDU frames, such as GMRP. • Tag Only mode means that the port can only accept tagged packets. When you select Tag Only the ES7510-XT discards untagged frames or Priority-Tagged only frames received on this port.

VLAN Port Configuration Page (Continued)	
Ingress Filtering	<p>Ingress filtering instructs the VLAN engine to filter out undesired traffic on a port.</p> <ul style="list-style-type: none"> • When you Enable Ingress Filtering, the port checks whether the incoming frames belong to the VLAN they claimed or not. The port then determines if the frames can be processed or not. For example, if a tagged frame from <i>TEST VLAN</i> is received, and Ingress Filtering is enabled, the ES7510-XT determines if the port is on the <i>TEST VLAN</i>'s Egress list. If it is, the frame can be processed. If it is not, the frame is dropped. • When you select Disable, the port accepts all incoming frames regardless of its VLAN classification. This control does not affect VLAN independent BPDU frames, such as Super Ring, STP, GVRP and LACP. It does affect VLAN dependent BPDU frames, such as GMRP.
Apply	<p>Click Apply to apply the settings.</p> <p>Note: You must Save the settings (Page 134), if you want to maintain these settings if the ES7510-XT is powered off.</p>

VLAN Information

The *VLAN Information* page displays the current settings of your VLAN table, including VLAN ID, Name, Status, and Egress rule of the ports.

VLAN Information Help

VLAN ID	Name	Status	1	2	3	4	5	6	7	8	9	10
1	VLAN1	Static	U	U	U	U	U	U	U	U	U	U

Reload


VLAN Information Page	
VLAN ID	The ID of the VLAN.
Name	The name of the VLAN.
Status	<p>Static means that this is a manually configured static VLAN.</p> <p>Unused means this VLAN is created by web user interface/CLI and has no member ports and the VLAN is not workable yet.</p> <p>Dynamic means this VLAN was learnt by GVRP.</p> <ul style="list-style-type: none"> -- No VLAN setting. T A Trunk Link is a LAN segment used for multiplexing VLANs between VLAN bridges. All the devices that connect to a Trunk Link must be IEEE 802.1Q VLAN-aware, which sends and receives frames with IEEE 802.1Q tags. U An Access Link is a LAN segment used to multiplex one or more IEEE 802.1Q VLAN-unaware devices into a Port of a VLAN Bridge. Devices that are connected to an Access Link sends and receives frames without IEEE 802.1Q tagging, which is the identification of the VLAN it belongs to.

Private VLAN

A private VLAN helps to resolve the primary VLAN ID shortage, client ports' isolation and network security issues. The private VLAN features provides primary and secondary VLANs within a single switch.

Primary VLAN: The uplink port is usually a member of the primary VLAN. A primary VLAN contains promiscuous ports that can communicate with Secondary VLANs.

Secondary VLAN: The client ports are usually defined within secondary VLAN. The secondary VLAN includes Isolated and Community VLANs. The client ports can be isolated VLANs or can be grouped in the same Community VLAN. The ports within the same community VLAN can communicate with each other, however, the isolated VLAN ports cannot.

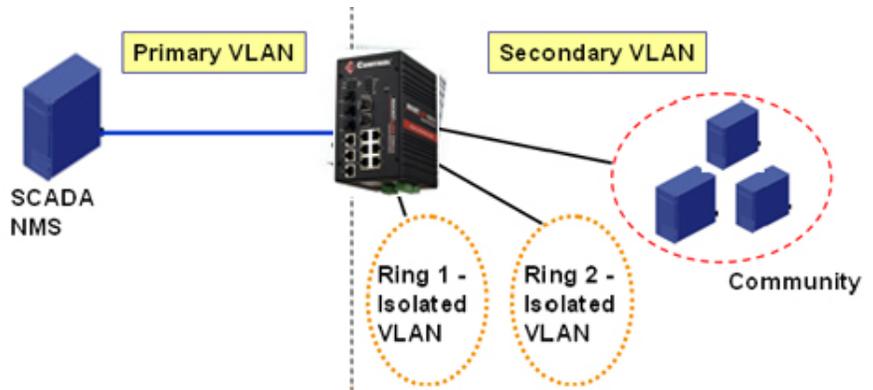

This figure shows a typical private VLAN network. A SCADA/Public Server or NMS workstation is usually located in a primary VLAN. Client PCs and rings are usually located within the secondary VLAN.

Optionally, you can use the CLI for configuration, see [Private VLAN \(CLI\)](#) on Page 174.

PVLAN Configuration

PVLAN Configuration allows you to assign a private VLAN type. Choose the private VLAN types for each VLAN you want configure.

Note: You must have previously configured a VLAN in the VLAN Configuration screen. Refer to [VLAN Configuration](#) on Page 94 for information.

Private VLAN Configuration

VLAN ID	Private VLAN Type
2	Primary <input type="button" value="v"/>
3	Isolated <input type="button" value="v"/>

Private VLAN Configuration Page

VLAN ID	<ul style="list-style-type: none"> • <i>Primary VLAN</i> - The uplink port is usually the primary VLAN. Ports within a primary VLAN can communicate with ports in a secondary VLAN • <i>Secondary VLAN</i> - The client ports are usually defined within secondary VLAN. The secondary VLAN includes Isolated VLAN and Community VLANs. The client ports can be isolated VLANs or can be grouped in the same Community VLAN. The ports within the same community VLAN can communicate with each other. However, the isolated VLAN ports cannot.
---------	---

Private VLAN Configuration Page (Continued)	
Private VLAN Type	<ul style="list-style-type: none"> • None: The VLAN is not included in private VLAN. • Primary: A primary VLAN contains promiscuous ports that can communicate with the secondary VLANs. • Isolated: The member ports of the VLAN are isolated. • Community: The member ports of the VLAN can communicate with each other.
Apply	Click Apply to apply the settings. Note: You must Save the settings (Page 134), if you want to maintain these settings if the ES7510-XT is powered off.

PVLAN Port Configuration

The *PVLAN Port Configuration* page allows you to configure the port configuration and private VLAN associations.

PVLAN Port Configuration Help

Port Configuration

Port	PVLAN Port Type	VLAN ID
1	Normal ▼	None ▼
2	Normal ▼	None ▼
3	Normal ▼	None ▼
4	Normal ▼	None ▼
5	Normal ▼	None ▼
6	Normal ▼	None ▼
7	Normal ▼	None ▼
8	Normal ▼	None ▼
9	Normal ▼	None ▼
10	Normal ▼	None ▼

Apply

Private VLAN Association

Secondary VLAN	Primary VLAN
3	None ▼

Private VLAN Port Configuration Page	
PVLAN Port Type	The following options are available: Normal: Normal ports remain in their original VLAN configuration. Host: Host ports can be mapped to the secondary VLAN. Promiscuous: Promiscuous ports can be associated to the primary VLAN.
VLAN ID	After assigning the port type, this displays the available VLAN ID for which the port can associate.

Private VLAN Port Configuration Page (Continued)	
Private VLAN Association	
Secondary VLAN	After the isolated and community VLANs are configured in the <i>Private VLAN Configuration</i> page, the VLANs belonging to the second VLAN are displayed.
Primary VLAN	After the Primary VLAN Type is assigned in <i>Private VLAN Configuration</i> page, the secondary VLAN can associate to the primary VLAN ID. Note: Before configuring PVLAN port type, the private VLAN Association should be done first.

PVLAN Information

The *PVLAN Information* page allows you to see the private VLAN information. Click **Reload** to refresh the page contents.

PVLAN Information

[Help](#)

Primary VLAN	Secondary VLAN	Secondary VLAN Type	Port
2	--	--	--
--	3	Isolated	--

[Reload](#)

GVRP Configuration

GARP VLAN Registration Protocol (GVRP) allows you to set-up VLANs automatically rather than manual configuration on every port on every switch in the network. GVRP conforms to the IEEE 802.1Q specification. This defines a method of tagging frames with VLAN configuration data that allows network devices to dynamically exchange VLAN configuration information with other devices.

GARP (Generic Attribute Registration Protocol), a protocol that defines procedures by which end stations and switches in a local area network (LAN) can register and de-register attributes, such as identifiers or addresses, with each other. Every end station and switch thus has a current record of all the other end stations and switches that can be reached. GVRP, like GARP, eliminates unnecessary network traffic by preventing attempts to transmit information to unregistered users. In addition, it is necessary to manually configure only one switch and all the other switches are configured accordingly.

GVRP Configuration Help

GVRP Protocol Disable ▾

Port	State	Join Timer	Leave Timer	Leave All Timer
1	Disable ▾	20	60	1000
2	Disable ▾	20	60	1000
3	Disable ▾	20	60	1000
4	Disable ▾	20	60	1000
5	Disable ▾	20	60	1000
6	Disable ▾	20	60	1000
7	Disable ▾	20	60	1000
8	Disable ▾	20	60	1000
9	Disable ▾	20	60	1000
10	Disable ▾	20	60	1000

Note: Timer unit is centisecond.

Apply

GVRP Configuration Page	
GVRP Protocol	Allows you to Enable/Disable GVRP globally.
State	After enabling GVRP globally, you can still Enable/Disable GVRP by port.
Join Timer	Controls the interval of sending the GVRP Join BPDU (Bridge Protocol Data Unit). An instance of this timer is required on a per-port, per-GARP participant basis.
Leave Timer	Controls the time to release the GVRP reservation after having received the GVRP Leave BPDU. An instance of the timer is required for each state machine that is in the LV state.
Leave All Timer	Controls the period to initiate the garbage collection of registered VLAN. The timer is required on a per-port, per-GARP participant basis.
Apply	Click Apply to apply the settings. <i>Note: You must Save the settings (Page 134), if you want to maintain these settings if the ES7510-XT is powered off.</i>

Traffic Prioritization

Quality of Service (QoS) provides a traffic prioritization mechanism which allows you to deliver better service to certain flows. QoS can also help to alleviate congestion problems and ensure high-priority traffic is delivered first. This section allows you to configure *Traffic Prioritization* settings for each port with regard to setting priorities.

The ES7510-XT QoS supports four physical queues, weighted fair queuing (WRR) and Strict Priority scheme, that follows the IEEE 802.1p CoS tag and IPv4 TOS/DiffServ information to prioritize the traffic of your industrial network.

The following web pages are included in this group:

- [QoS Setting](#)
- [CoS-Queue Mapping](#) on Page 105
- [DSCP-Queue Mapping](#) on Page 106

Optionally, you can use the CLI for configuration, see [Traffic Prioritization \(CLI\)](#) on Page 178.

QoS Setting

Use this subsection to set up QoS settings for the ES7510-XT.

QoS Setting
Help

Queue Scheduling

8,4,2,1 weighted fair queuing scheme
 Strict priority scheme

Port	CoS	Trust Mode
1	0	CoS Only
2	0	CoS Only
3	0	CoS Only
4	0	CoS Only
5	0	CoS Only
6	0	CoS Only
7	0	CoS Only
8	0	CoS Only
9	0	CoS Only
10	0	CoS Only

Apply
Cancel

QoS Setting Page	
Queue Scheduling	
Use an 8,4,2,1 weighted fair queuing scheme	This is also known as WRR (Weight Round Robin). The ES7510-XT follows the 8:4:2:1 rate to process the packets in a queue from the highest priority to the lowest. For example, the system processes 8 packets with the highest priority in the queue, 4 with middle priority, 2 with low priority, and 1 with the lowest priority at the same time.
Use a strict priority scheme	Packets with higher priority in the queue are always processed first, except that there is no packet with higher priority.
Port Setting	
CoS	The CoS column indicates that the default port priority value for untagged or priority-tagged frames. When the ES7510-XT receives the frames, the ES7510-XT attaches the value to the CoS field of the incoming VLAN-tagged packets. You can enable 0,1,2,3,4,5,6 or 7 to the port.
Trust Mode	<p>Trust Mode indicates the Queue Mapping types that you can select.</p> <ul style="list-style-type: none"> • COS Only (default): The port priority follows the CoS-Queue Mapping you have assigned. The ES7510-XT provides the default CoS-Queue table for which you can refer to for the next command. • DSCP Only: Port priority only follows the DSCP-Queue Mapping you have assigned. • COS first: Port priority follows the CoS-Queue Mapping first, and then the DSCP-Queue Mapping rule. • DSCP first: Port priority follows the DSCP-Queue Mapping first, and then the CoS-Queue Mapping rule.
Apply	<p>Click Apply to apply the settings.</p> <p>Note: You must Save the settings (Page 134), if you want to maintain these settings if the ES7510-XT is powered off.</p>

CoS-Queue Mapping

Use this page to change the CoS values into the Physical Queue mapping table. Since the switch fabric of ES7510-XT supports four queues, Lowest, Low, Middle, and High users should therefore assign how to map the CoS value to the level of the physical queue.

You can assign the mapping table or follow the suggestion of the IEEE 802.1p standard. The ES7510-XT uses IEEE 802.1p suggestion as default values. CoS Values 1 and 2 are mapped to physical Queue 0, the lowest queue. CoS Values 0 and 3 are mapped to physical Queue 1, the low/normal physical queue. CoS Values 4 and 5 are mapped to physical Queue 2, the middle physical queue. CoS Values 6 and 7 are mapped to physical Queue 3, the high physical queue.

Class of service (CoS) is a 3 bit field within a layer two Ethernet frame header defined by IEEE 802.1p when using IEEE 802.1Q tagging. The field specifies a priority value of between 0 and 7 inclusive that can be used by Quality of Service (QoS) disciplines to differentiate traffic.

While CoS operates only on Ethernet at the data link layer, other QoS mechanisms (such as DiffServ) operate at the network layer and higher. Others operate on other physical layers. Although IEEE 802.1Q tagging must be enabled to communicate priority information from switch to switch, some switches use CoS to internally classify traffic for QoS purposes.

Differentiated Services (DiffServ) is a model where traffic is treated by intermediate systems with relative priorities based on the type of services (ToS) field. Defined in RFC2474 and RFC2475, the DiffServ standard supersedes the original specification for defining packet priority described in RFC791. DiffServ increases the number of definable priority levels by reallocating bits of an IP packet for priority marking. The DiffServ architecture defines the DiffServ field, which supersedes the ToS field in IPv4 to make per-hop behavior (PHB) decisions about packet classification and traffic conditioning functions, such as; metering, marking, shaping, and policing.

CoS-Queue Mapping Help

COS	0	1	2	3	4	5	6	7
Queue	1 ▾	0 ▾	0 ▾	1 ▾	2 ▾	2 ▾	3 ▾	3 ▾

Note : Queue 3 is the highest priority queue in using Strict Priority scheme.

Apply
Cancel

After configuration, press **Apply** to enable the settings.

Note: You must **Save** the settings ([Page 134](#)), if you want to maintain these settings if the ES7510-XT is powered off.

DSCP-Queue Mapping

Use this page to change DSCP values to Physical Queue mapping table. Since the switch fabric of the ES7510-XT only supports four queues. Lowest, Low, Middle and High users should therefore assign how to map DSCP values to the level of the physical queue. You should therefore assign how to map DSCP value to the level of the queue. You can change the mapping table to follow the upper layer 3 switch or routers' DSCP setting.

DSCP-Queue Mapping

DSCP	0	1	2	3	4	5	6	7
Queue	1 ▾	1 ▾	1 ▾	1 ▾	1 ▾	1 ▾	1 ▾	1 ▾
DSCP	8	9	10	11	12	13	14	15
Queue	0 ▾	0 ▾	0 ▾	0 ▾	0 ▾	0 ▾	0 ▾	0 ▾
DSCP	16	17	18	19	20	21	22	23
Queue	0 ▾	0 ▾	0 ▾	0 ▾	0 ▾	0 ▾	0 ▾	0 ▾
DSCP	24	25	26	27	28	29	30	31
Queue	1 ▾	1 ▾	1 ▾	1 ▾	1 ▾	1 ▾	1 ▾	1 ▾
DSCP	32	33	34	35	36	37	38	39
Queue	2 ▾	2 ▾	2 ▾	2 ▾	2 ▾	2 ▾	2 ▾	2 ▾
DSCP	40	41	42	43	44	45	46	47
Queue	2 ▾	2 ▾	2 ▾	2 ▾	2 ▾	2 ▾	2 ▾	2 ▾
DSCP	48	49	50	51	52	53	54	55
Queue	3 ▾	3 ▾	3 ▾	3 ▾	3 ▾	3 ▾	3 ▾	3 ▾
DSCP	56	57	58	59	60	61	62	63
Queue	3 ▾	3 ▾	3 ▾	3 ▾	3 ▾	3 ▾	3 ▾	3 ▾

Note : Queue 3 is the highest priority queue in using Strict Priority scheme.

Apply

Cancel

After configuration, press **Apply** to enable the settings.

Note: You must *Save the settings* ([Page 134](#)), if you want to maintain these settings if the ES7510-XT is powered off.

Multicast Filtering

For multicast filtering, the ES7510-XT uses IGMP (Internet Group Management Protocol) Snooping technology. IGMP is an internet protocol that provides a way for internet device to report its multicast group membership to adjacent routers. Multicasting allows one computer on the internet to send data to a multitude of other computers that have identified themselves as being interested in receiving the originating computer's data.

Multicasting is useful for such applications as updating the address books of mobile computer users in the field, sending out newsletters to a distribution list, and broadcasting streaming media to an audience that has tuned into the event by setting up multicast group membership.

In effect, IGMP Snooping manages multicast traffic by making use of switches, routers, and hosts that support IGMP. Enabling IGMP Snooping allows the ports to detect IGMP queries, report packets, and manage multicast traffic through the switch. IGMP has three fundamental types of messages, as shown in the following table.

Messages	
Query	A message sent from the querier (an IGMP router or a switch) that asks for a response from each host that belongs to the multicast group.
Report	A message sent by a host to the querier to indicate that the host wants to be or is a member of a given group indicated in the report message.
Leave Group	A message sent by a host to the querier to indicate that the host has quit as a member of a specific multicast group.

You can enable **IGMP Snooping** and **IGMP Query** functions. This section illustrates the information of the IGMP Snooping function, including different multicast groups' VID and member ports, and IP multicast addresses that range from 224.0.0.0 to 239.255.255.255.

The following web pages are included in this group:

- [IGMP Query](#) on Page 108
- [IGMP Snooping](#) on Page 109
- [GMRP Configuration](#) on Page 110

Optionally, you can use the CLI for configuration, see [Multicast Filtering \(CLI\)](#) on Page 181.

IGMP Query

Use this page to configure the *IGMP Query* feature. Since the ES7510-XT can only be configured by member ports of the management VLAN, the IGMP Query can only be enabled on the management VLAN. If you want to run IGMP Snooping feature in several VLANs, first check to see whether each VLAN has its own IGMP Querier.

The IGMP querier periodically sends query packets to all end-stations on the LANs or VLANs that are connected to it. For networks with more than one IGMP querier, a switch with the lowest IP address becomes the IGMP querier.

IGMP Query Help

Enable	Disable ▾
Version	v2 ▾
Query Interval	125
Query Maximum Response Time(s)	10

Apply

IGMP Query Page	
Version	Select Version 1 , Version 2 or Disable . <ul style="list-style-type: none"> Version 1 means IGMP V1 General Query Version 2 means IGMP V2 General Query. The query is forwarded to all multicast groups in the VLAN. Disable allows you to disable IGMP Query.
Query Interval(s)	The period of query (seconds) sent by querier. Enter a number between 1 and 65,535.
Query Maximum Response Time	This option is available when you select Version 2 . The span querier detect (seconds) to confirm there are no more directly connected group members on a LAN. Enter a number between 1 and 25.
Apply	Click Apply to apply the settings. <i>Note: You must Save the settings (Page 134), if you want to maintain these settings if the ES7510-XT is powered off.</i>

IGMP Snooping

Use this page to enable the IGMP Snooping feature, assign IGMP Snooping for specific VLANs, and view the *IGMP Snooping Table* from a dynamic learnt or static that you provide..

IGMP Snooping/Filtering
Help

IGMP Snooping Global Setting Disable ▾

Apply

IGMP Snooping VLAN Setting

VLAN	IGMP Snooping
1	Disable ▾

Multicast Filtering Mode

Broadcast Unknown ▾

Apply

IGMP Snooping Table

Multicast Address	VLAN ID	Interface

Reload

IGMP Snooping Page	
IGMP Snooping Global Setting	You can select to Enable or Disable IGMP Snooping. After enabling IGMP Snooping, you can then enable IGMP Snooping for specific VLAN using the <i>IGMP Snooping VLAN Setting</i> table.
IGMP Snooping VLAN Setting	
VLAN	Refers to the VLAN number that was configured using the <i>VLAN Configuration</i> page.
IGMP Snooping	Select Enable to start IGMP snooping on the selected VLAN.
Filtering Mode	The available filtering modes are: <ul style="list-style-type: none"> Broadcast-Unknown- The unknown multicast is broadcast to all ports even if they are not member ports of the groups. Discard-Unknown - The unknown multicast is discarded. Non-member ports do not receive the unknown multicast streams. Source-only-learning - This is forwarding unknown multicast traffic to all ports that are already members of a multicast group.
IGMP Snooping Table	This table displays the multicast group IP address, VLAN ID it belongs to, and member ports of the multicast group. The ES7510-XT supports 256 multicast groups. Click Reload to refresh the table.

Note: You must **Save** the settings ([Page 134](#)), if you want to maintain these settings if the ES7510-XT is powered off.

GMRP Configuration

GARP Multicast Registration Protocol (GMRP) is a Generic Registration Protocol (GARP) application that provides a multicast traffic management facility at Layer 2 similar to what IGMP provides at Layer 3. GMRP and GARP are industry-standard protocols first introduced as part of IEEE 802.1D.

GMRP Configuration	
GMRP Global Setting	Enable/Disable GMRP protocol.
State	The state of the GMRP operation on a selected port. The value enabled indicates that the GMRP is enabled on this port as long as the GMRP protocol is also enabled for this device. When disabled, but the GMRP protocol is still enabled for the device, GMRP is disabled on the selected port.
Apply	Click Apply to apply the settings. <i>Note: You must Save the settings (Page 134), if you want to maintain these settings if the ES7510-XT is powered off.</i>

GMRP Configurations Help

GMRP Protocol Disable ▾

Apply

Port	State
1	Disable
2	Disable
3	Disable
4	Disable
5	Disable
6	Disable
7	Disable
8	Disable
9	Disable
10	Disable

Apply

SNMP

Simple Network Management Protocol (SNMP) is a protocol to exchange management information between network devices. SNMP is a member of the TCP/IP protocol suite. The ES7510-XT supports SNMP v1 and v2c and v3.

An SNMP managed network consists of two main components: agents and a manager. An agent is a management software module that resides in a managed switch. An agent translates the local management information from the managed device into a SNMP compatible format. The manager is the console through the network.

The following web pages are included in this group:

- [SNMP Configuration](#)
- [SNMP V3 Profile](#) on Page 112
- [SNMP Traps](#) on Page 113

Optionally, you can use the CLI for configuration, see [SNMP \(CLI\)](#) on Page 185.

SNMP Configuration

Use this page to configure the SNMP v1/v2c Community. The community string can be viewed as the password because SNMP v1/v2c does not request you to enter a password before you try to access the SNMP agent.

SNMP V1/V2c Configurations Help

	Community String	Privilege
<input type="checkbox"/>	public	Read Only
<input type="checkbox"/>	private	Read and Write
<input type="checkbox"/>		Read Only
<input type="checkbox"/>		Read Only

Apply Remove

The community includes two privileges:

- **Read Only** privilege, you only have the ability to read the values of MIB tables. The default community string is **public**.
- **Read and Write** privilege, you have the ability to read and set the values of MIB tables. The default community string is **private**.

The ES7510-XT allows you to assign four community strings. Type the community string, select the privilege, and then click **Apply**.

Note: *When you first install the device in your network, we recommend that you change the community string. Most SNMP management applications use public and private as the default community name, this could be a network security leak.*

SNMP V3 Profile

SNMP v3 can provide more security functions when you perform remote management through SNMP protocol. It delivers SNMP information to the administrator with user authentication; all of data between the ES7510-XT and the administrator are encrypted to ensure secure communication.

SNMP V3 Profile Help

SNMP V3

User Name	<input type="text"/>
Security Level	<input type="text" value="None"/>
Authentication Level	<input type="text" value="MD5"/>
Authentication Password	<input type="password"/>
DES Password	<input type="password"/>

SNMP V3 Users

User Name	Security Level	Authentication Protocol	Authentication Password	Privacy Protocol	Privacy Password

SNMP V3 Profile Page	
User Name	SNMP v3 user name.
Security Level	Select the following levels of security: None , Authentication , and Authentication and Privacy .
Authentication Level	<p>Select either MD5 (Message-Digest algorithm 5) or SHA (Secure Hash Algorithm).</p> <ul style="list-style-type: none"> MD5 is a widely used cryptographic hash function with a 128-bit hash value. SHA functions refer to five Federal Information Processing Standard-approved algorithms for computing a condensed digital representation. <p>The ES7510-XT provides two user authentication protocols in MD5 and SHA. You need to configure SNMP v3 parameters for your SNMP tool with the same authentication method.</p>
Authentication Password	Enter the SNMP v3 user authentication password.
DES Password	Enter the password for SNMP v3 user DES Encryption.
Add	Click to add an SNMP v3 user.
SNMP V3 Users	<p>This table provides SNMP v3 user information.</p> <p>Click Remove to remove a selected SNMP v3 user.</p> <p>Click Reload to reload SNMP v3 user information.</p>

Note: You must **Save** the settings ([Page 134](#)), if you want to maintain these settings if the ES7510-XT is powered off.

SNMP Traps

SNMP Trap is the notification feature defined by SNMP protocol. All the SNMP management applications can understand such trap information. So you do not need to install new applications to read the notification information.

SNMP Trap Page	
SNMP Trap	Click Enable or Disable SNMP trap functionality.
Apply	Click Apply to apply the settings. <i>Note: You must Save the settings (Page 134), if you want to maintain these settings if the ES7510-XT is powered off.</i>
SNMP Trap Server	
Server IP	The SNMP trap server IP address.
Community	The SNMP trap server community string.
Version	The SNMP trap version, V1 or V2c.
Add	Click the Add button to add a SNMP server.
Trap Server Profile	
Server IP	The SNMP trap server IP address
Community	The SNMP trap server community string.
Version	The SNMP trap version, V1 or V2c.
Remove	Click Remove to remove selected SNMP server.
Reload	Click the Reload button to reload SNMP server information.

You can see the change of the SNMP predefined standard traps and Control pre-defined traps. The pre-defined traps can be found on the [Control ftp site](#).

***Note:** You must **Save** the settings ([Page 134](#)), if you want to maintain these settings if the ES7510-XT is powered off.*

SNMP Trap
Help

SNMP Trap Disable ▾

SNMP Trap Server

Server IP	<input type="text"/>
Community	<input type="text"/>
Version	V1 ▾

Trap Server Profile

Server IP	Version	Community

Security

The ES7510-XT provides several security features for you to secure your connection. The following pages are included in this group:

- [Port Security](#) on Page 114
- [IP Security](#) on Page 115
- [802.1X Configuration](#) on Page 116
- [802.1X Port Configuration](#) on Page 118
- [802.1X Port Information](#) on Page 120

Optionally, you can use the CLI for configuration, see [Security \(CLI\)](#) on Page 186.

Port Security

The *Port Security* page allows you to stop the MAC address learning for specific port. After stopping MAC learning, only the MAC address listed in Port Security List can access the switch and transmit/receive traffic.

You can restrict what devices can access the ES7510-XT management features. MAC addresses added to the static MAC address table can be authorized to access specified ports on the switch.

When **Port Security** is enabled on any port, only authorized MAC addresses are able to access the management features of the ES7510-XT on enabled ports. Ports with security disabled block all attempts to access the ES7510-XT's management features. To globally disable port security you must disable the feature on each individual port.

The *Port Security* page allows you to enable port security and configure a port security entry list.

Port Security Help

Port Security

Port	State
1	Disable ▾
2	Disable ▾
3	Disable ▾
4	Disable ▾
5	Disable ▾
6	Disable ▾
7	Disable ▾
8	Disable ▾
9	Disable ▾
10	Disable ▾

Add Port Security Entry

Port	VLAN ID	Mac Address
Port 1 ▾	<input type="text"/>	<input type="text"/>

Show Port Security List

Port	VLAN ID	Mac Address
<input type="text"/>	<input type="text"/>	<input type="text"/>

Port Security Page

Port Security State	Select Enable to change the state of the Port Security State for this port.
Apply	Click Apply to apply the settings. Note: You must Save the settings (Page 134), if you want to maintain these settings if the ES7510-XT is powered off.
Add Port Security Entry	Select the port, and enter the VID and MAC address. The format of the MAC address is xxxx.xxxx.xxxx, for example: 00c0.4e38.0101. The maximum volume of one port is 10. The system can accept a total of 100 Port Security MAC addresses.
Add	Adds a port security entry.
Show Port Security List	This table shows you enabled port security entries.
Remove	Removes the selected port security entry.

IP Security

Use the *Security IP* page to set up specific IP addresses to grant authorization for management access to this ES7510-XT through a web browser or Telnet.

IP Security Page	
IP Security	Select Enable and Apply to enable the IP security function.
Add Security IP	You can assign specific IP addresses and then click Add . Only these IP addresses can access and manage ES7510-XT through a web browser or Telnet. The maximum security IP is 10.
Security IP List	This table shows you added the security IP addresses.
Remove	Click Remove to delete a highlighted entry.
Reload	To reload the table.

802.1X Configuration

IEEE 802.1X is the protocol that performs authentication to obtain access to IEEE 802 LANs. It is port-base network access control. With the function, the ES7510-XT could control which connection is available or not.

802.1X Configuration Help

System Auth Control

Authentication Method

RADIUS Server

RADIUS Server IP	<input type="text" value="192.168.10.100"/>
Shared Key	<input type="text" value="radius-key"/>
Server Port	<input type="text" value="1812"/>
Accounting Port	<input type="text" value="1813"/>

Secondary RADIUS Server

RADIUS Server IP	<input type="text"/>
Shared Key	<input type="text"/>
Server Port	<input type="text"/>
Accounting Port	<input type="text"/>

Local RADIUS User

User Name	Password	VID
<input type="text"/>	<input type="text"/>	<input type="text"/>

Local RADIUS User List

Delete	Name	Password	VID
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>

IEEE 802.1x Page	
System Auth Control	Enable or Disable the IEEE 802.1x authentication.
Authentication Method	RADIUS is an authentication server that provides a key for authentication. When you use this method, you must connect the switch to the server. If you select Local for the authentication method, the switch uses the local user database that can be created in this page for authentication.
RADIUS Server	
RADIUS Server IP	The IP address of the RADIUS server.
Shared Key	The password used to communicate between the ES7510-XT and the RADIUS Server.
Server Port	The UDP port of the RADIUS server.

IEEE 802.1x Page (Continued)	
Accounting Port	The port for packets that contains the account login or logout information.
Secondary RADIUS Server	
RADIUS Server IP	You can set a Secondary RADIUS Server, if the primary RADIUS server goes down.
Shared Key	The password used to communicate between the ES7510-XT and the secondary RADIUS Server.
Server Port	The UDP port of the secondary RADIUS server.
Accounting Port	The port for packets that contains the account login or logout information for the secondary server.
Local RADIUS User	<p>You can add an Account/Password for local authentication.</p> <ul style="list-style-type: none"> • User name: The user name of the local RADIUS user. • Password: The password of the local RADIUS user. • VID: The VLAN ID (VID) of the local RADIUS user. <p>Click the Add button to add a local RADIUS user.</p>
Local RADIUS User List	<p>Shows the account information, select Remove to remove a selected account.</p> <ul style="list-style-type: none"> • User name: The user name of the local RADIUS user. • Password: The password of the local RADIUS user. • VID: The VLAN ID (VID) of the local RADIUS user.

802.1X Port Configuration

After configuring the **RADIUS Server** or **Local RADIUS User List**, you also need to configure the authentication mode, authentication behavior, applied VLAN for each port, and permitted communications.

802.1X Port Configuration Help

802.1X Port Configuration

Port	Port Control	Re-authentication	Max Request	Guest VLAN	Host Mode	Admin Control Direction
<input type="checkbox"/> 1	Force Authorized	Disable	2	0	Single	Both
<input type="checkbox"/> 2	Force Authorized	Disable	2	0	Single	Both
<input type="checkbox"/> 3	Force Authorized	Disable	2	0	Single	Both
<input type="checkbox"/> 4	Force Authorized	Disable	2	0	Single	Both
<input type="checkbox"/> 5	Force Authorized	Disable	2	0	Single	Both
<input type="checkbox"/> 6	Force Authorized	Disable	2	0	Single	Both
<input type="checkbox"/> 7	Force Authorized	Disable	2	0	Single	Both
<input type="checkbox"/> 8	Force Authorized	Disable	2	0	Single	Both
<input type="checkbox"/> 9	Force Authorized	Disable	2	0	Single	Both
<input type="checkbox"/> 10	Force Authorized	Disable	2	0	Single	Both

802.1X Timeout Configuration

Port	Re-Auth Period(s)	Quiet Period(s)	Tx period(s)	Supplicant Timeout	Server Timeout(s)
1	3600	60	30	30	30
2	3600	60	30	30	30
3	3600	60	30	30	30
4	3600	60	30	30	30
5	3600	60	30	30	30
6	3600	60	30	30	30
7	3600	60	30	30	30
8	3600	60	30	30	30
9	3600	60	30	30	30
10	3600	60	30	30	30

802.1x Port Configuration Page	
Port control	Force Authorized means that this port is authorized; the data is free to move in/out. Force unauthorized is just the opposite, the port is blocked. To control this port with a RADIUS server, select Auto for port control.
Reauthentication	If this field is enabled, the ES7510-XT requests the client to re-authenticate. The default time interval is 3600 seconds.
Max Request	This is the maximum times that the ES7510-XT allows a client request.
Guest VLAN	The permitted range for this field is 0 to 4094. If this field is set to 0, that means the port is blocked after an authentication failure. Otherwise, the port is set to Guest VLAN.
Host Mode	If there is more than one device connected to this port, set the Host Mode to Single , which means only the first PC to authenticate successfully can access this port. If this port is set to Multi , all of the devices can access this port once any one of them passes the authentication.
Admin Control Direction	Use this to determine which devices can only send data or both send and receive data.
Apply	Click Apply to apply the settings.
Initialize Selected	Click to set the authorization state of the selected port to initialize status.
Reauthenticate Selected	Click to send an EAP Request to the requestor to request reauthentication.
Default Selected	Click to reset the configurable IEEE 802.1x parameters of selected port to the default values.
802.1x Timeout Configuration	
Re-Auth Period(s)	Controls the re-authentication time interval (seconds), you can enter a range of 1 - 65535.
Quiet Period(s)	When authentication fails, the ES7510-XT waits for a period and then tries to communicate with the RADIUS server again.
Tx Period(s)	The time interval of the authentication request.
Supplicant Timeout(s)	The timeout for the client authentication.
Sever Timeout(s)	The timeout for the server response for authentication.
Apply	Click Apply to apply the settings. Note: You must Save the settings (Page 134), if you want to maintain these settings if the ES7510-XT is powered off.

802.1X Port Information

Use the *802.1X Port Information* page to observe the port status for **Port Control Status**, **Authorize Status**, **Authorized Supplicant**, and **Oper Control Direction** for each port.

802.1X Port Information

[Help](#)

Port	Port Control	Authorized Status	Authorized Supplicant	Oper Control Direction
1	Force Authorized	Authorized	NONE	Both
2	Force Authorized	Authorized	NONE	Both
3	Force Authorized	Authorized	NONE	Both
4	Force Authorized	Authorized	NONE	Both
5	Force Authorized	Authorized	NONE	Both
6	Force Authorized	Authorized	NONE	Both
7	Force Authorized	Authorized	NONE	Both
8	Force Authorized	Authorized	NONE	Both
9	Force Authorized	Authorized	NONE	Both
10	Force Authorized	Authorized	NONE	Both

[Reload](#)

Warning

The ES7510-XT provides several types of warning features for you to remotely monitor the status of the attached devices or changes in your network. The features include Fault Relay, System Log and SMTP Email Alert.

The following web pages are included in this group:

- [Fault Relay](#)
- [Event Selection](#) on Page 123
- [SysLog Configuration](#) on Page 124
- [SMTP Configuration](#) on Page 125

Optionally, you can use the CLI for configuration, see [Warnings \(CLI\)](#) on Page 188.

Fault Relay

The ES7510-XT provides one alarm relay output (DO) that can support multiple fault conditions. The relay contacts are energized (open) for normal operation and close under fault conditions. The fault conditions include power failure, Ethernet port link faults, Ring topology changes, Ping failures, DI state changes or ping remote IP address failure.

Fault Relay Setting Help

Relay 1	Status is Off
<input type="checkbox"/> Power	Power ID 1
<input type="checkbox"/> Port Link	Port <input type="checkbox"/> 1 <input type="checkbox"/> 2 <input type="checkbox"/> 3 <input type="checkbox"/> 4 <input type="checkbox"/> 5 <input type="checkbox"/> 6 <input type="checkbox"/> 7 <input type="checkbox"/> 8 <input type="checkbox"/> 9 <input type="checkbox"/> 10
<input type="checkbox"/> Ring	Ring Failure
<input type="checkbox"/> Ping	IP Address
<input type="checkbox"/> Ping Reset	IP Address Reset Time(s) Hold Time(s)
<input type="checkbox"/> Dry Output	On Period(s) Off Period(s)
<input type="checkbox"/> DI	DI ID 1 DI State Low

The **Relay 1** field shows the current state of the relay. If the relay is triggered, the event type is marked with an asterisk (*). The above image shows that a power event occurred.

The following table describes Fault Relay conditions:

Fault Relay	
Relay 1	This displays whether the Relay status is on or off. You must select a fault relay option and click Apply for the status to display as on.
Power	Detects power input status on PW1, PW2, or both power sources.
Port Link	Monitors port link down events for the selected ports.
Ring	Monitors ring topology changes.
Ping	If the target IP address does not reply to the ping request, the fault relay is enabled.

Fault Relay	
Ping Reset	<p>Pings target device and triggers the relay to emulate to emulate a power reset on the remote device if the remote system crashes.</p> <ul style="list-style-type: none"> • IP Address: Remote device IP address whose power wiring is connected with relay output. • Reset Time (Sec): Duration that the relay contact is opened to emulate the power switch is off. After the reset time, the relay closes to emulate that the power switch is on. • Hold Time (Sec): Boot time that the remote device requires. After the relay contact closes the ES7510-XT starts pinging after the hold time.
Dry Output	<p>The relay continuously opens and closes the contacts. The available range is 0-65535 seconds.</p> <p>Note: Do not use this function with any other event.</p> <ul style="list-style-type: none"> • On Period: Duration of the relay output short (closed). • Off Period: Duration of the relay output open.
DI	Relay triggered when DI changes state to high or low.
Apply	<p>Click Apply to apply the settings.</p> <p>Note: You must Save the settings (Page 134), if you want to maintain these settings if the ES7510-XT is powered off.</p>

Event Selection

Event Types can be divided into three basic groups: System Events, PoE Events, and Port Events. System Events are related to the overall function of the switch, whereas Port Events are related to the activity of specific ports.

Event Selection
Help

System Event Selection

Device Cold Start
 Authentication Failure
 Power 1 Failure
 Fault Relay
 DI 1 Change
 Ring Event
 SFP Event

Device Warm Start
 Time Synchronization Failure
 Power 2 Failure

 Loop Protection

Port Event Selection

Port	Link State
1	Disable ▾
2	Disable ▾
3	Disable ▾
4	Disable ▾
5	Disable ▾
6	Disable ▾
7	Disable ▾
8	Disable ▾
9	Disable ▾
10	Disable ▾

PoE Event Selection

Port	PoE Powering
1	Disable ▾
2	Disable ▾
3	Disable ▾
4	Disable ▾
5	Disable ▾
6	Disable ▾
7	Disable ▾
8	Disable ▾

Apply
Cancel

System Event	Warning is sent when....
Device Cold Start	Power is cut off and then reconnected.
Device Warm Start	Reboot the device by CLI or web user interface.
Authentication failure	An incorrect password or SNMP Community String is entered.
Time Synchronize Failure	Accessing the NTP Server is failing.
Power 1 Failure	PW1 power failure.
Power 2 Failure	PW2 power failure.
Fault Relay	Fault Relay has occurred.
Ring Event	A ring event has occurred.
Loop Protection	A loop protection event has occurred.
SFP	The information read from the DDM SFP transceiver is over temperature or out the range of TX/RX power.

Port Event	Warning is sent when.....
Link-Up	The port is connected to another device.
Link-Down	The port is disconnected. For example, the cable is pulled out or the opposing devices is down.
Both	The link status changed.
PoE Powering Event	Warning is sent when.....
Enable	The PoE port is powering.
Disable	The PoE port is not powering.
Apply	Click Apply to apply the settings. Note: You must Save the settings (Page 134), if you want to maintain these settings if the ES7510-XT is powered off.

SysLog Configuration

The *System Log* page provides the system administrator ES7510-XT events history. There are two System Log modes provided by the ES7510-XT, **Local** mode and **Remote** mode.

Syslog Configuration Help

Syslog Mode ▼

Remote IP Address

Note: When enabled Local and Both mode, you can monitor the system logs in the [Monitor and Diag]/Event log] page.

Warning - SysLog Configuration Page	
Syslog Mode	<p>There are two system logs available:</p> <ul style="list-style-type: none"> Local Mode: The ES7510-XT prints the events that have been selected in the Event Selection page to the System Log table of the ES7510-XT. You can monitor the system logs in the <i>Monitor and Diag /Event Log</i> page. Remote Mode: Assign the IP address of the System Log server. The ES7510-XT sends the events that occurred in the selected in <i>Event Selection</i> page to System Log server that you assign. Both: This enables both Local and Remote modes.
Remote IP Address	The IP address of the System log server.
Apply	Click Apply to apply the settings. Note: You must Save the settings (Page 134), if you want to maintain these settings if the ES7510-XT is powered off.

When enabling **Local** or **Both** modes, you can monitor the system logs in the *Monitor and Diag /Event Log* page.

SMTP Configuration

The ES7510-XT supports an email alert feature. The ES7510-XT sends the events that have occurred to a remote email server. The email warning conforms to the SMTP standard.

The *E-mail Alert* page allows you to assign the SMTP Server IP, Sender E-mail, and Receiver E-mail. If the SMTP server requests authentication, you can set up the user name and password.

SMTP Configuration Help

Email Alert Disable ▼

SMTP Server IP	<input type="text" value="192.168.0.1"/>
Mail Account	<input type="text" value="user@example.com"/>
<input type="checkbox"/> Authentication	
User Name	<input type="text"/>
Password	<input type="password"/>
Confirm Password	<input type="password"/>
Rcpt Email Address 1	<input type="text"/>
Rcpt Email Address 2	<input type="text"/>
Rcpt Email Address 3	<input type="text"/>
Rcpt Email Address 4	<input type="text"/>

Apply Cancel

SMTP Configuration Page	
SMTP Server IP Address	Enter the IP address of the email server.
Mail Account	The mail account for the SMTP server.
Authentication	Click the check box to enable password.
User Name	Enter an email account name (maximum 40 characters).
Password	Enter the password of the email account.
Confirm Password	Re-type the password of the email account.
<i>You can set up to 4 email addresses to receive email alarm from the ES7510-XT.</i>	
Rcpt E-mail Address 1	The first email address to receive an email alert from the ES7510-XT (maximum 40 characters).
Rcpt E-mail Address 2	The second email address to receive an email alert from the ES7510-XT (maximum 40 characters).
Rcpt E-mail Address 3	The third email address to receive an email alert from the ES7510-XT (maximum 40 characters).
Rcpt E-mail Address 4	The fourth email address to receive an email alert from the ES7510-XT (maximum 40 characters).
Apply	Click Apply to apply the settings. Note: You must Save the settings (Page 134), if you want to maintain these settings if the ES7510-XT is powered off.

Monitor and Diag

The ES7510-XT provides several web user interface pages for you to monitor the status of the switch or diagnostics when encountering problems related to the ES7510-XT. The features include MAC Address Table, Port Statistics, Port Mirror, Event Log, and Ping.

The following web pages are included in this group:

- [LLDP Configuration](#) on Page 126
- [MAC Address Table](#)
- [Port Statistics](#) on Page 130
- [Port Mirroring](#) on Page 131
- [Event Logs](#) on Page 132
- [Ping Utility](#) on Page 132

Optionally, you can use the CLI for configuration, see [Monitor and Diag \(CLI\)](#) on Page 191.

LLDP Configuration

The ES7510-XT supports topology discovery or LLDP (IEEE 802.1AB Link Layer Discovery Protocol) functionality that can help to discovery multi-vendor's network devices on the same segment by a network monitoring system (NMS) that supports LLDP functionality.

With LLDP functionality, NMS can easily maintain the topology map, display port ID, port description, system description, and VLAN ID. Once a link failure occurs, the topology changes the events that can be updated to the NMS as well. The **LLDP Port State** can display the neighbor ID and IP learnt from the connected devices.

LLDP Configuration Help

LLDP Disable ▼

LLDP Timer

20

LLDP Hold Time

120

Apply
Cancel

LLDP Port State

Local Port	Neighbor ID	Neighbor IP	Neighbor VID

Reload

LLDP Configuration Page	
LLDP	Select Enable/Disable to enable/disable LLDP function.
LLDP Configuration	
LLDP timer	This is the interval time of each LLDP in seconds; valid values are from 5 to 254. The default is 2030 seconds when LLDP is enabled.
LLDP hold time	The Time to Live (TTL) timer. The LLDP state expires when the LLDP is not received by the hold time. The default is 120 seconds when LLDP is enabled. and the range is from 10 to 255.

LLDP Configuration Page (Continued)	
LLDP Port State	
Local Port	The current port number that linked with network device.
Neighbor ID	The MAC address of the peer device on the same network segment.
Neighbor IP	The IP address of the peer device on the same network segment.
Neighbor VID	The VLAN ID of the peer device on the same network segment.
Apply	Click Apply to apply the settings. <i>Note: You must Save the settings (Page 134), if you want to maintain these settings if the ES7510-XT is powered off.</i>

MAC Address Table

The ES7510-XT provides 8K entries in the *MAC Address Table*. You can change the Aging time, add Static Unicast MAC Address, monitor the MAC address or sort them by different packet types and ports.

MAC Address Table

Aging Time(secs)

Static Unicast MAC Address

MAC Address	VID	Port
<input type="text"/>	<input type="text"/>	Port 1 <input type="button" value="v"/>

MAC Address Table

MAC Address	Address Type	VID	1	2	3	4	5	6	7	8	9	10
<input type="checkbox"/> 00c0.4e5b.0001	Dynamic Unicast	1	V									
<input type="checkbox"/> 00c0.4e54.0079	Dynamic Unicast	1	V									
<input type="checkbox"/> 00c0.4e38.0002	Dynamic Unicast	1	V									
<input type="checkbox"/> 00c0.4e2c.008c	Dynamic Unicast	1	V									
<input type="checkbox"/> 00c0.4e5f.0068	Dynamic Unicast	1	V									
<input type="checkbox"/> 0030.18a7.85c2	Dynamic Unicast	1	V									
<input type="checkbox"/> 00c0.4e5b.0000	Dynamic Unicast	1	V									
<input type="checkbox"/> 00c0.4e2d.0008	Dynamic Unicast	1	V									
<input type="checkbox"/> 0030.18af.dde3	Dynamic Unicast	1	V									
<input type="checkbox"/> 00c0.4e39.010c	Dynamic Unicast	1	V									
<input type="checkbox"/> 00c0.4e36.0002	Dynamic Unicast	1	V									
<input type="checkbox"/> 0002.0180.2705	Dynamic Unicast	1	V									
<input type="checkbox"/> 00c0.4e38.0067	Dynamic Unicast	1	V									
<input type="checkbox"/> 0040.f4a8.c3e7	Dynamic Unicast	1	V									
<input type="checkbox"/> 00c0.4e07.fff0	Dynamic Unicast	1	V									
<input type="checkbox"/> 00c0.4e17.ffb	Dynamic Unicast	1	V									
<input type="checkbox"/> 00c0.4e35.0009	Dynamic Unicast	1	V									
<input type="checkbox"/> 00c0.4e60.0000	Dynamic Unicast	1	V									
<input type="checkbox"/> 00c0.4e32.0000	Dynamic Unicast	1	V									
<input type="checkbox"/> 00c0.4e1c.ffd	Dynamic Unicast	1	V									
<input type="checkbox"/> 00c0.4e2f.031d	Dynamic Unicast	1	V									
<input type="checkbox"/> 0015.7b84.07f2	Dynamic Unicast	1	V									
<input type="checkbox"/> 00c0.4e42.fff8	Dynamic Unicast	1	V									

MAC Address Table Page

Aging Time (Sec)	<p>Each switch fabric has a size limit to write the learnt MAC address. To save more entries for a new MAC address, the switch fabric ages out a non-used MAC address entry per the Aging Time timeout.</p> <p>This value determines the interval that an automatically learnt MAC address entry remains valid in the forwarding database, since its last access as a source address, before being purged. The value should be increments of 15 in seconds.</p> <p>The minimum age time is 15 seconds. The maximum age time is 3825 seconds or almost 64 minutes. The default Aging Time is 300 seconds.</p> <p>If the value is set to 0, the aging function is disabled and all learned addresses remain in the database forever.</p>
------------------	---

MAC Address Table Page (Continued)	
Static Unicast MAC Address	Some applications may require that you type in the static Unicast MAC address to its MAC address table. Type the MAC address (format: xxxx.xxxx.xxxx), select its VID, and Port ID, and then click Add to add it to MAC Address Table.
MAC Address Table	<p>This displays all the MAC addresses learnt by the switch fabric.</p> <p>The packet types include Management Unicast, Static Unicast, Dynamic Unicast, Static Multicast, and Dynamic Multicast.</p> <p>The table allows you to sort the address by the packet types and port.</p>
Address Types	<ul style="list-style-type: none"> • Management Unicast means the MAC address of the switch. It belongs only to the CPU port. • Static Unicast MAC addresses can be added and deleted. • Dynamic Unicast MAC is a MAC address learnt by the switch Fabric. • Static Multicast can be added by the CLI and can be deleted using the web user interface and CLI. • Dynamic Multicast appears after you enabled IGMP and the switch learnt IGMP report. • Management Multicast - multicast address that is configured for management purposes, such as GVRP and so on. Management entries are read-only. <p>Dynamic and static entries can be removed.</p>
Remove	Click to remove the static Unicast/Multicast MAC address.
Reload	Click to reload to refresh the table. The new learnt Unicast/Multicast MAC address are updated in the <i>MAC Address Table</i> .
Apply	<p>Click Apply to apply the settings.</p> <p>Note: You must Save the settings (Page 134), if you want to maintain these settings if the ES7510-XT is powered off.</p>

Port Statistics

Use this page to view operation statistics for each port. The statistics that can be viewed include **Link Type**, **Link State**, **Rx Good**, **Rx Bad**, **Rx Abort**, **Tx Good**, **Tx Bad** and **Collisions**.

Note: *If you see an increase of Bad, Abort or Collision counts, that may mean the network cable is not properly connected or the network performance of the port is poor. Check your network cable, the network interface card of the connected device, the network application, or reallocate the network traffic.*

The following information provides a view of the current port statistic information.

Port Statistics

Port	Type	Link	State	Rx Good	Rx Bad	Rx Abort	Tx Good	Tx Bad	Collision
<input type="checkbox"/> 1	1000	Connected	Enable	1000468	0	57	1743717	0	0
<input type="checkbox"/> 2	0	Disconnected	Enable	0	0	0	0	0	0
<input type="checkbox"/> 3	0	Disconnected	Enable	0	0	0	0	0	0
<input type="checkbox"/> 4	0	Disconnected	Enable	0	0	0	0	0	0
<input type="checkbox"/> 5	0	Disconnected	Enable	0	0	0	0	0	0
<input type="checkbox"/> 6	0	Disconnected	Enable	0	0	0	0	0	0
<input type="checkbox"/> 7	0	Disconnected	Enable	0	0	0	0	0	0
<input type="checkbox"/> 8	0	Disconnected	Enable	0	0	0	0	0	0
<input type="checkbox"/> 9	0	Disconnected	Enable	0	0	0	0	0	0
<input type="checkbox"/> 10	0	Disconnected	Enable	0	0	0	0	0	0

Port Statistics Page	
Type	Indicates the port type.
Link	Indicates the link status; Up or Down .
State	Indicates the link state; Enable or Disable .
Rx Good	The count of good frames received, which is the total number of received unicast, broadcast, multicast, and pause frames.
Rx Bad	The count of bad frames received, which is the total number of undersize, fragment, oversize, jabber, receive errors (RxErr), and frame check sequence errors (FCSErr) frames.
Rx Abort	The count of abort frames received, which is the total number of discarded and filtered frames.
Tx Good	The count of good frames transmitted, which is the total number of transmitted unicast, broadcast, multicast and pause frames.
Tx Bad	The count of FCSErr frames transmitted.
Collision	The count of collision frames, including single, multiple, excessive, and late collisions frames.
Clear Selected	Click to clear selected port counts.
Clear All	Click to clear all counts.
Reload	Click to reload all counts.

Port Mirroring

Port mirroring (also called *port spanning*) is a tool that allows you to mirror the traffic from one or more ports onto another port, without disrupting the flow of traffic on the original port. Any traffic that goes into or out of the **Source Ports** is duplicated at the **Destination Ports**. This traffic can then be analyzed at the Destination Port using a monitoring device or application. The network administrator typically utilizes this tool for diagnostics, debugging, or fending off attacks.

Port Mirroring

Port Mirroring ▾

Port	Source Port		Destination Port	
	Rx	Tx	Rx	Tx
1	<input type="checkbox"/>	<input type="checkbox"/>	<input type="radio"/>	<input type="radio"/>
2	<input type="checkbox"/>	<input type="checkbox"/>	<input type="radio"/>	<input type="radio"/>
3	<input type="checkbox"/>	<input type="checkbox"/>	<input type="radio"/>	<input type="radio"/>
4	<input type="checkbox"/>	<input type="checkbox"/>	<input type="radio"/>	<input type="radio"/>
5	<input type="checkbox"/>	<input type="checkbox"/>	<input type="radio"/>	<input type="radio"/>
6	<input type="checkbox"/>	<input type="checkbox"/>	<input type="radio"/>	<input type="radio"/>
7	<input type="checkbox"/>	<input type="checkbox"/>	<input type="radio"/>	<input type="radio"/>
8	<input type="checkbox"/>	<input type="checkbox"/>	<input type="radio"/>	<input type="radio"/>
9	<input type="checkbox"/>	<input type="checkbox"/>	<input type="radio"/>	<input type="radio"/>
10	<input type="checkbox"/>	<input type="checkbox"/>	<input type="radio"/>	<input type="radio"/>

Port Mirroring Mode Page	
Port Mirror Mode	Select Enable or Disable to enable/disable port mirroring.
Source Port	This is also known as <i>Monitor Port</i> . These are the ports that you want to monitor. The traffic of all source/monitor ports is copied to destination/analysis ports. You can choose a single port, or any combination of ports, but you can only monitor them in Rx or TX only. Click the check box of the Port ID , Rx , Tx or both to select the source ports.
Destination Port	This is also known as <i>Analysis Port</i> . You can analyze the traffic of all the monitored ports at this port without affecting the flow of traffic on the port or ports being monitored. Only one RX/TX of the destination port can be selected. The network administrator typically connects a LAN analyzer or Netxray device to this port.
Apply	Click Apply to apply the settings. Note: You must Save the settings (Page 134), if you want to maintain these settings if the <i>ES7510-XT</i> is powered off.

Event Logs

The System Log feature was introduced in [SysLog Configuration](#) on Page 124. When **System Log Local** mode is selected, the ES7510-XT records events that occurred in the local log table. This page shows the log table. The entry includes the index, occurred data and time, and content of the events.

Event Logs

Index	Date	Time	Event Log

Click **Clear** to clear the entries. Click **Reload** to refresh the table.

Ping Utility

This page provides a **Ping Utility** to ping a remote device and check whether the device is alive or not. Type the **Target IP** address of the target device and click **Start** to start the ping.

Ping


Destination

After few seconds, you can see the result in the **Result** field.

Device Front Panel

The **Device Front Panel** allows you to see the LED status of the ES7510-XT.

Device Front Panel

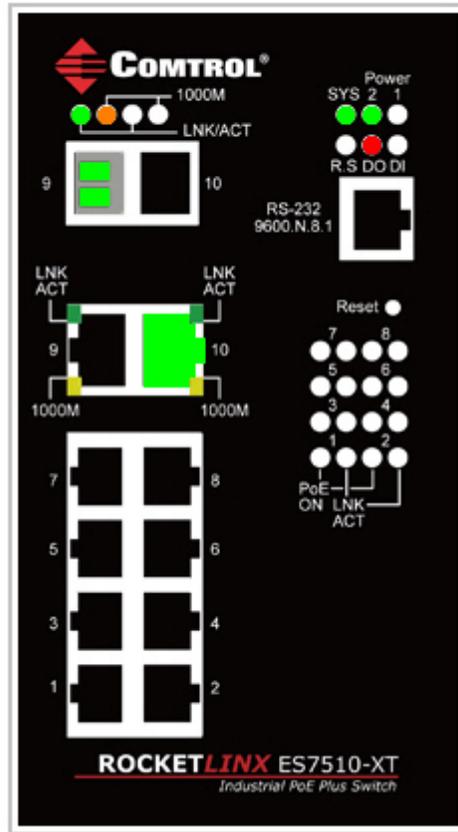

LED Name	LED Lit	LED Blinking	LED Off
Power 1/2	System power is ready	Power not available	Power off
Sys	System ready	System is uploading firmware or the system is rebooting	System not ready
RS	Green: Working as ring master	Red: Ring failed	ES7510-XT is in slave mode
DO	Red: DO activated	Not available	DO not activated
DI	Green: DI activated	Not available	DI not activated
LINK/ACT	Port link is up	Port is transmitting	Port link is down
1000M	The port is linked at 1000Mbps	Not available	Not available
PoE Ports 1-8	Powering	Looking for a device	Power output over current, a cable short, or PoE is disabled for this port
Ports 9-10	Port link is up	Port is transmitting	Port link is down

Note: There is not a CLI command for this feature. If you can view the physical LEDs, you can use the [LED Descriptions](#) on Page 14, which provide detailed LED information. If you need to locate your ES7510-XT in a rack, you can use the LED Tracker feature in PortVision DX.

Save to Flash

The **Save Configuration** page saves any changes to the configuration to the flash.

If the switch loses power before clicking **Save Configuration** causes loss of the new settings. Applying changes on web user interface pages do not save the changes to the flash.

After selecting **Save Configuration**, click **Save to Flash** to save your new configuration.

Save

Do you want to save configuration to flash?

Optionally, you can use the CLI, see [Saving to Flash \(CLI\)](#) on Page 194.

Logout

Click the **Logout** option in the web user interface to manually logout the web connection.

If you have saved your changes, click **Yes** to logout, **No** to remain the web user interface.

Logout

Do you want to logout?

Configuration Using the Command Line Interface (CLI)

Overview

The ES7510-XT provides in-band and out-band configuration methods:

- Out-band management means that you configure the ES7510-XT using the RS-232 console cable and the Command Line Interface (CLI) to access the ES7510-XT without attaching an admin PC to the network. You can use out-band management if you lose the network connection to the ES7510-XT.
- In-band management means that you connect remotely using the ES7510-XT IP address through the network. You can remotely connect with the ES7510-XT embedded web user interface or a Telnet console and the CLI.

If you are planning on using in-band management, you need to program the ES7510-XT IP address to meet your network requirements. The easiest way to configure the IP address is using a Windows system and PortVision DX, which is discussed in [Configuring the Network Settings](#) on Page 20.

If you want to use the web user interface for configuration, see [Configuration Using the Web User Interface](#) on Page 33.

Use the following procedures to access the ES7510-XT using the CLI:

- [Using the Serial Console](#)
- [Using a Telnet/SSH Console](#)

This section contains information about the following groups of commands:

- [Basic Settings \(CLI\)](#) on Page 148
- [Port Configuration \(CLI\)](#) on Page 154
- [Power over Ethernet \(CLI\)](#) on Page 157
- [Network Redundancy \(CLI\)](#) on Page 162
- [VLAN \(CLI\)](#) on Page 171 and [Private VLAN \(CLI\)](#) on Page 174
- [Traffic Prioritization \(CLI\)](#) on Page 178
- [Multicast Filtering \(CLI\)](#) on Page 181
- [SNMP \(CLI\)](#) on Page 185
- [Security \(CLI\)](#) on Page 186
- [Warnings \(CLI\)](#) on Page 188
- [Monitor and Diag \(CLI\)](#) on Page 191
- [Saving to Flash \(CLI\)](#) on Page 194
- [Logging Out \(CLI\)](#) on Page 194
- [Service \(CLI\)](#) on Page 194

Using the Serial Console

Control provides one RS-232 RJ45 console cable with the ES7510-XT.


Note: A system COM port is required to use a serial console connection. If you do not have an available COM port, use the [Using a Telnet/SSH Console](#) procedure on [Page 139](#).

1. Attach the RS-232 connector (DB9 female) to your PC COM port and connect the other end to the **Console** port of the ES7510-XT. If you misplace the cable, you can use this console cable pin assignment or purchase a null-modem cable. If building a replacement cable, at a minimum, you need to connect Tx, Rx, and ground signals.


RJ45 Pin	RJ45 Signal
5	DTR
7	Tx
6	Rx
3	DSR
4	Gnd
1	CTS
8	RTS
2	CD

DB9F Pin	DB9 Signal
1	CD
2	Rx
3	Tx
4	DTR
5	Gnd
6	Not Used
7	RTS
8	CTS
9	RI

Serial End




2. Start a terminal program such as HyperTerminal or use PuTTY, which is included with PortVision DX. The following example illustrates using PuTTY.
3. Open PortVision DX, click **Tools | Applications | PuTTY**.

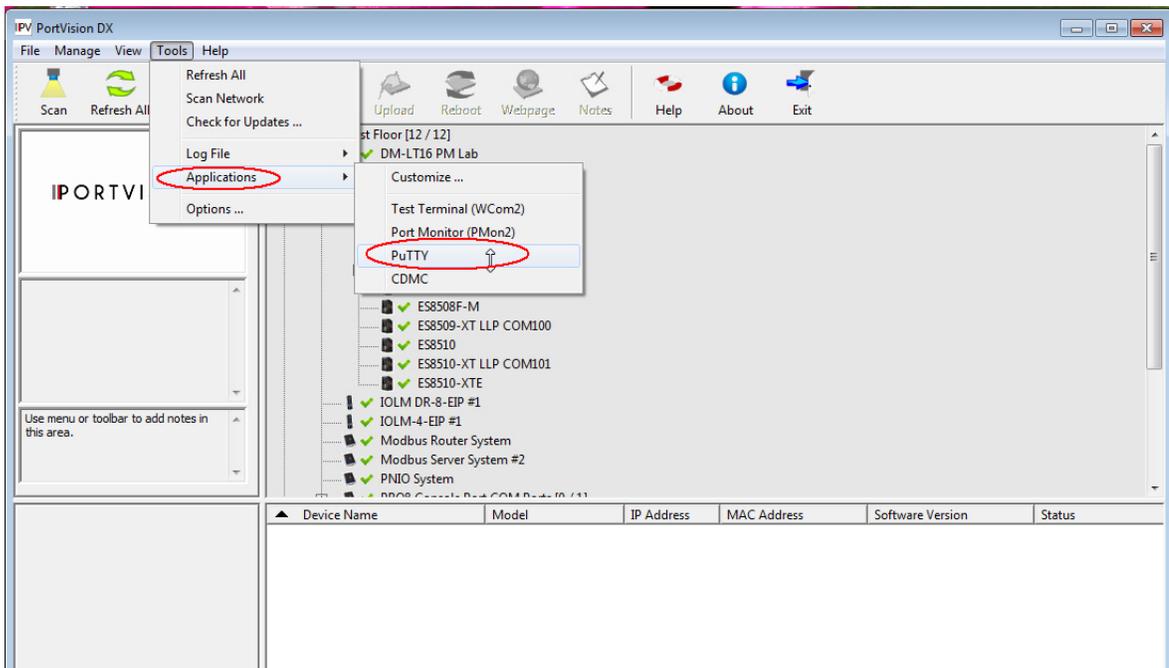

4. Click **Serial** for the **Connection type**.



- Type a **Host Name** to represent the COM port.

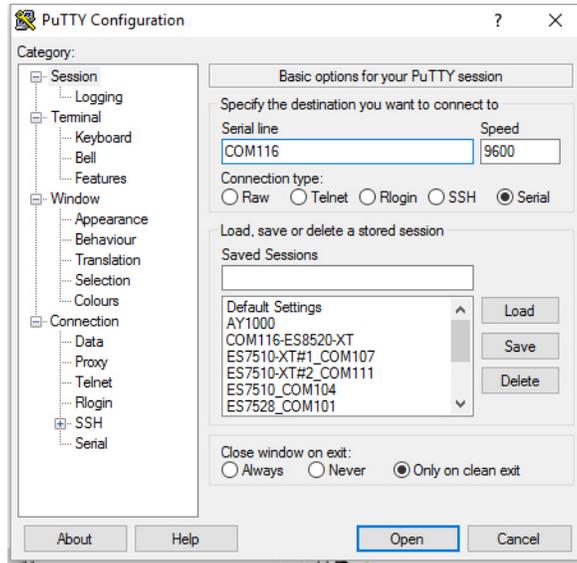

- Click **Serial** on the left side under **Category**.
- Configure the serial line with the following characteristics.

Serial Settings	Value
Baud Rate	9600
Data bits	8
Parity	None
Stop Bit	1
Flow Control	None

- Click **Session** under **Category** in the menu.
- Type an appropriate **Saved Session** name and click **Save**.

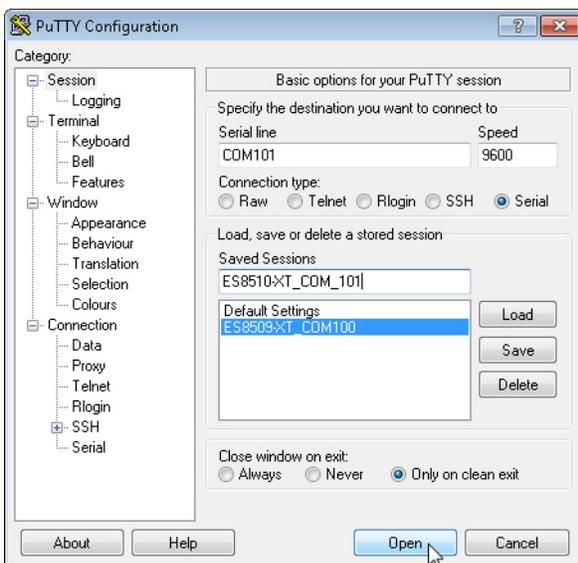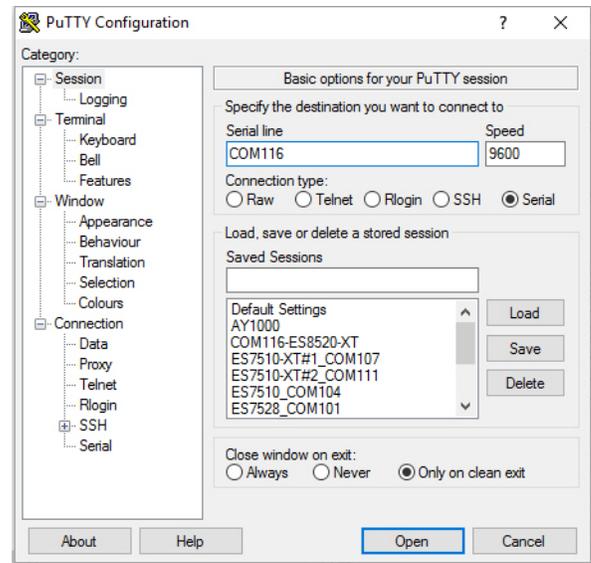

- Click **Open**.

11. Press **Enter**.
12. Log in to the switch. The default user name is **admin**, password, **admin**.
 - a. Type the login and press the **Enter** key.
 - b. Type the password and press the **Enter** key.
13. If necessary, configure the IP address for your network. The following example shows how to program an IP address of 192.168.11.252 with a Class B subnet mask (255.255.0.0).

```
Switch> enable
Switch# configure terminal
Switch(config)# int vlan1
Switch(config-if)# ip address 192.168.11.252/16
```

For more information about using the CLI, see [Command Line Interface Introduction](#) on Page 140.

Using a Telnet/SSH Console


The ES7510-XT supports a Telnet console or SSH console with the Command Line Interface (CLI), which is the same as what you see using the RS-232 console port. The SSH connection can secure all the configuration commands you send to the ES7510-XT.

SSH is a client/server architecture while the ES7510-XT is the SSH server. When you want to make SSH connection with the ES7510-XT, you can use PortVision DX or download an SSH client tool.


The next discussion provides procedures to use PortVision DX with a Telnet or SSH connection.

You can use PortVision DX to access the CLI using the following procedure.

1. If you have not done so, install PortVision DX ([Installing PortVision DX](#) on Page 18).
2. Start PortVision DX.
3. Right-click the ES7510-XT in the *Device List* pane (lower) and click **Telnet/SSH**.

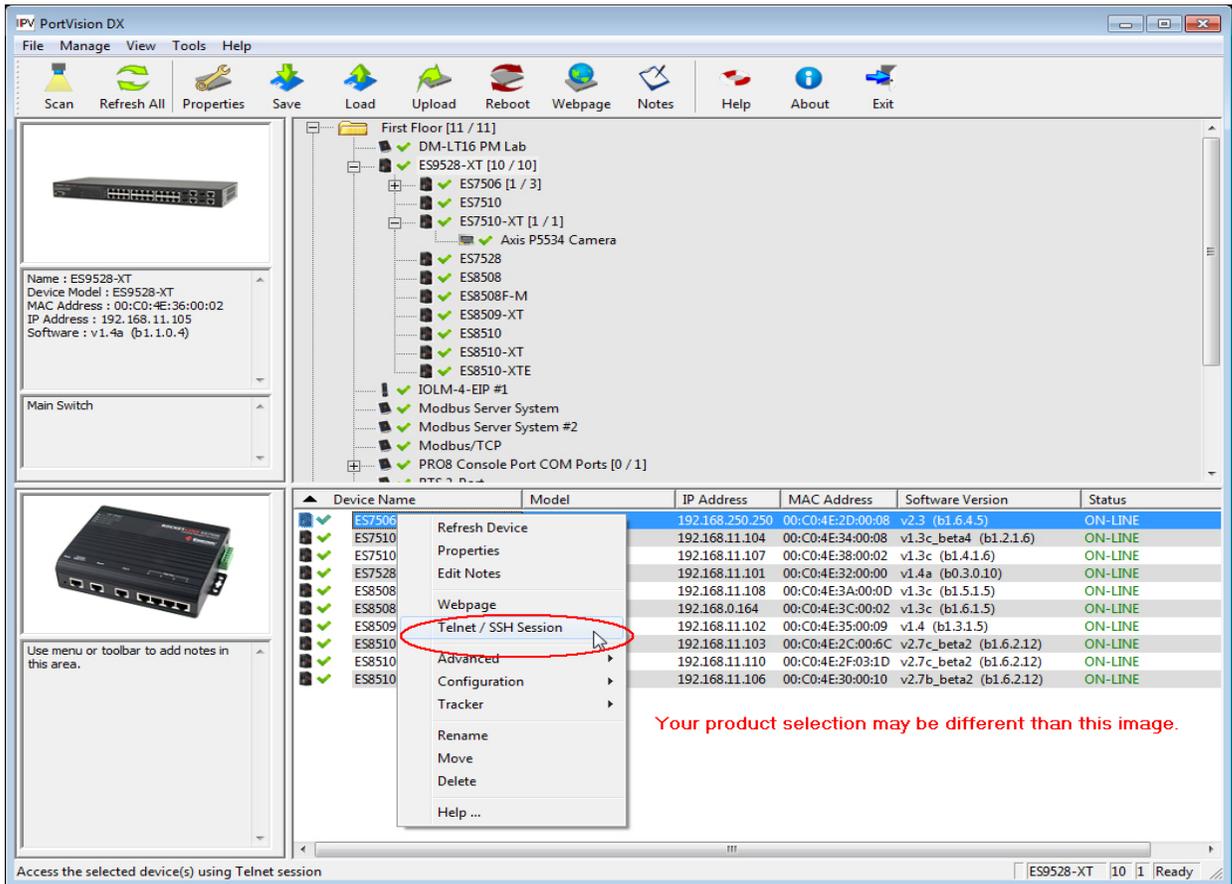


4. Select either Telnet or SSH and leave the default port number.

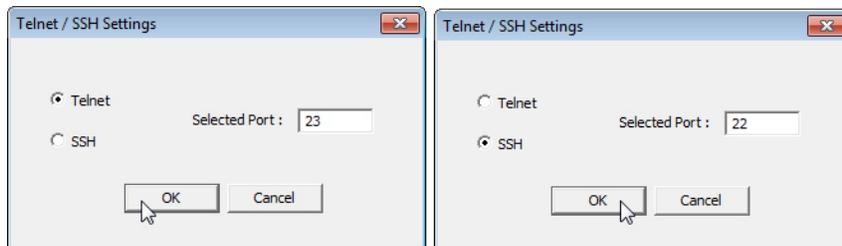

If you selected SSH, click **Yes**.




- Enter the user name (default = **admin**).
- Enter the password (default = **admin**).

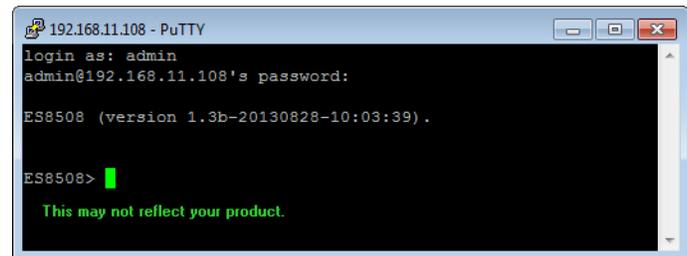

If you selected **Telnet**:

- Enter the user name (default = **admin**).
- Enter the password (default = **admin**).

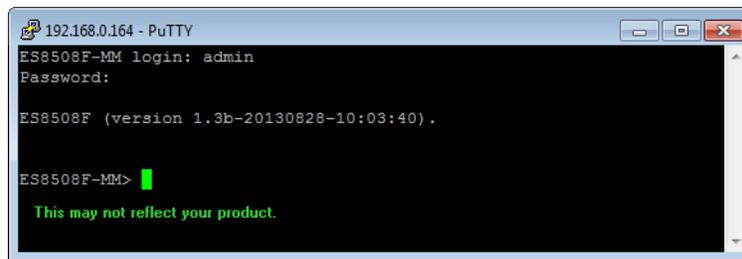

All the commands you see in SSH are the same as the CLI commands you see through the RS-232 console. For more information about using the CLI, see [Command Line Interface Introduction](#) on Page 140.

Command Line Interface Introduction

The Command Line Interface (CLI) is the user interface to the ES7510-XT embedded software. You can view the system information, show the status, configure the switch, and receive a response back from the system by keying in a command.

There are several different command modes. Each command mode has its own access ability, available command lines and uses different command lines to enter and exit. These modes are:

- [User EXEC Mode](#) on Page 141, which includes commands to ping or telnet to a remote device, and show some basic information and to access *Privileged EXEC* mode
- [Privileged EXEC Mode](#) on Page 143, which provides a view current configuration, reset default, reload switch, show system information, save configuration, and access *Global Configuration* mode
- [Global Configuration Mode](#) on Page 144, which you can use configure all ES7510-XT features and access to one of the *Interface Configuration* modes
- [\(Port\) Interface Configuration](#) on Page 145, which can be used to configure port settings
- [\(VLAN\) Interface Configuration](#) on Page 146, which can be used to configure the settings for a specific VLAN

Refer to [Configuration Using the Command Line Interface \(CLI\)](#) on Page 135 to access the CLI.

User EXEC Mode

When you login to the ES7510-XT with the CLI, you are in *User EXEC* mode.

In *User EXEC* mode, you can ping, telnet to a remote device, and show some basic information.

Type the command and press **Enter**:

- **enable** to access *Privileged EXEC* mode ([Privileged EXEC Mode](#) on Page 143).
- **exit** to logout.
- **?** to see the command list.
- **list** to review the *User EXEC* mode commands and corresponding options.

```
Switch>
  enable      Turn on privileged mode command
  exit        Exit current mode and down to previous mode
  list        Print command list
  ping        Send echo messages
  quit        Exit current mode and down to previous mode
  show        Show running system information
  telnet      Open a telnet connection
  traceroute  Trace route to destination
```

For the complete list of commands with options, refer to [User EXEC Mode](#) on Page 195.

Accessing the Options for a Command

The following example illustrates how to view the description and options for a command. This example illustrates the **show** command and the firmware version displayed may not reflect your firmware version.

Note: The **?** does not appear on the screen.

1. If you type **show?** (without a space between **show** and the **?**; do not press the **Enter** key) the ES7510-XT provides a basic description of that command.

```
Switch login: admin
Password:

Switch (version 2.7 -20130314 - 15:23:41)
switch> show
  show Show running system information
```

Note: The firmware version may not reflect your *RocketLinux*.

2. If you type **show ?** (with a space between **show** and the **?**; do not press the **Enter** key) the ES7510-XT provides information about the options for that command.

```
Switch> show
  arp          ARP table
  gvrp         GARP VLAN Registration Protocol
  ip           IP information
  version      Displays ISS version
```

3. Type **show ip ?** (with a space between **show** and the **?**, do not press the **Enter** key) to review the options for **ip**.

```
Switch> show ip
  forwarding  IP forwarding status
  route       IP routing table
```

4. Type **show ip route** and press the **Enter** key to view the IP routing tables for the ES7510-XT.

```
Switch> show ip route
Codes: K - kernel route, C - connected, S - static, R - RIP, O - OSPF,
      B - BGP, > - selected route, * - FIB route

S>* 0.0.0.0/0 [1/0] via 192.168.0.254, vlan1
C>* 127.0.0.0/8 is directly connected, lo
C>* 192.168.0.0/16 is directly connected, vlan1
```

5. If you type **list** and press **Enter**, the ES7510-XT provides you information about all of the commands and options for a mode. The following example shows the available commands and their options for *User EXEC* mode.

```
ES7510-XT> list
enable
exit
list
ping A.B.C.D
ping WORD
ping X:X::X:X
quit
show arp
show gvrp statistics [IFNAME]
show ip forwarding
show ip route
show ip route A.B.C.D
show ip route A.B.C.D/M
show ip route supernets-only
show version
telnet WORD
telnet WORD PORT
traceroute WORD
```

Privileged EXEC Mode

If you type **enable** in *User EXEC* mode, you can access *Privileged EXEC* mode. In this mode, the ES7510-XT allows you to view current configuration, reset default, reload switch, show system information, save configuration, and enter *Global Configuration* mode.

Type the following commands and press the **Enter** key:

- **configure terminal** to access *Global Configuration* mode ([Global Configuration Mode](#) on Page 144).
- **exit** to close the CLI.
- **?** to see the command list.
- **list** to review the *Privileged EXEC* mode commands and corresponding options.

For the complete list of commands and options, refer to [Privileged EXEC Mode](#) on Page 196.

```
Switch>enable
Switch#
  archive      manage archive files
  clear        Reset functions
  clock        Configure time-of-day clock
  configure    Configuration from vty interface
  copy         Copy from one file to another
  debug        Debugging functions
  disable      Turn off privileged mode command
  dot1x        IEEE 802.1x standard access security control
  end          End current mode and change to enable mode
  exit         Exit current mode and down to previous mode
  hardware     Hardware function
  list         Print command list
  no           Negate a command or set its defaults
  pager        Terminal pager
  ping         Send echo messages
  quit         Exit current mode and down to previous mode
  reboot       Reboot system
  reload       copy a default-config file to replace the current one
  show         Show running system information
  telnet       Open a telnet connection
  terminal     Set terminal line parameters
  traceroute   Trace route to destination
  write        Write running configuration to memory, network, or terminal
```

Global Configuration Mode

If you type **configure terminal** in *Privileged EXEC* mode, you can then access *Global Configuration* mode. In *Global Configuration* mode, you can configure all ES7510-XT features. Type the following commands and press the **Enter** key:

- **interface** *IFNAME/VLAN*, to access the corresponding *Interface Configuration* mode.
- **exit** to return to *Privileged EXEC* mode.
- **?** to see the command list.
- **list** to review the *Global Configuration* mode commands and corresponding options.

The following is a list of available command lists of *Global Configuration* mode. For the complete list of commands and options, refer to [Global Configuration Mode](#) on Page 201..

Switch# configure terminal	Optionally, type config term
Switch(config)#	
administrator	Administrator account setting
arp	Set a static ARP entry
auth	Authentication
clock	Configure time-of-day clock
default	Set a command to its defaults
dot1x	IEEE 802.1x standard access security control
end	End current mode and change to enable mode
ethertype	Ethertype
exit	Exit current mode and down to previous mode
gmrp	GMRP protocol
gvrp	GARP VLAN Registration Protocol
hostname	Set system's network name
interface	Select an interface to configure
ip	IP information
ipv6	IP information
lacp	Link Aggregation Control Protocol
list	Print command list
lldp	Link Layer Discovery Protocol
log	Logging control
loop-protect	Ethernet loop protection
mac-address-table	Mac address table
mirror	Port mirroring
modbus	Modbus TCP slave
nameserver	DNS Server
netvision	NetVision protocol
no	Negate a command or set its defaults
ntp	Configure NTP
poe	Configure Power over Ethernet
ptpd	IEEE1588 Precision Time Protocol
qos	Quality of Service (QoS)
redundant-ring	Configure redundant ring
relay	relay output type information
router	Enable a routing process
service	System service
sfp	Small form-factor pluggable
smtp-server	SMTP server configuration
snmp-server	SNMP server
spanning-tree	spanning tree algorithm
trunk	Trunk group configuration
vlan	Virtual LAN
warning-event	Warning event selection
write-config	Specify config files to write to

(Port) Interface Configuration

When you type **interface IFNAME** in *Global Configuration* mode, you can access *Interface Configuration* mode. In this mode you can configure port settings.

The port interface names for the Fast Ethernet ports are fa1 through fa7. The port interface names for Gigabit Ethernet port are gi910.

Type the interface name, for example fa1, when you want to enter a certain interface configuration mode. Type the following commands and press the **Enter** key:

- **exit** to return to *Privileged EXEC* mode.
- **?** to see the command list.
- **list** to review the *Interface Configuration* mode commands and corresponding options. The following list is the available commands for the *Port Interface Configuration* mode.

For the complete list of commands and options, refer to [Port Interface Configuration Mode](#) on Page 206.

```
Switch(config)# interface fa1
Switch(config-if)#
  acceptable          Configure 802.1Q acceptable frame types of a port
  auto-negotiation    Enable auto-negotiation state of a given port
  description         Interface specific description
  dot1x              IEEE 802.1x standard access security control
  duplex             Specify duplex mode of operation for a port
  end                End current mode and change to enable mode
  exit               Exit current mode and down to previous mode
  flowcontrol        Set flow-control value for an interface
  garp               General Attribute Registration Protocol
  ingress            IEEE 802.1Q ingress filtering features
  lacp               Link Aggregation Control Protocol
  list               Print command list
  loopback           Specify loopback mode of operation for a port
  mdix               Enable mdix state of a given port
  mtu                Specifies the MTU on a port
  no                 Negate a command or set its defaults
  poe                Configure Power over Ethernet
  qos                Quality of Service (QoS)
  quit               Exit current mode and down to previous mode
  rate-limit         Rate limit configuration
  sfp                Small form-factor pluggable
  shutdown           Shutdown the selected interface
  spanning-tree      spanning-tree protocol
  speed              Specify the speed of a Fast Ethernet port or a
                    Gigabit Ethernet port
  switchport         Set switching mode characteristics
```

(VLAN) Interface Configuration

If you type **interface VLAN VLAN-ID** in *Global Configuration* mode, you can access *VLAN Interface Configuration* mode. In this mode, you can configure the settings for the specific VLAN.

The VLAN interface name of VLAN 1 is VLAN 1, VLAN 2 is VLAN 2.

Type **exit** to return to the previous mode. Type **?** to see the available command list.

For the complete list of commands and options, refer to [VLAN Interface Configuration Mode](#) on Page 208.

```
Switch(config)# interface vlan 1
Switch(config-if)#
  description  Interface specific description
  end          End current mode and change to enable mode
  exit        Exit current mode and down to previous mode
  ip          Interface Internet Protocol config commands
  ipv6        Interface Internet Protocol config commands
  list        Print command list
  no          Negate a command or set its defaults
  quit        Exit current mode and down to previous mode
  shutdown    Shutdown the selected interface
```

Command Mode Summary

This table is a summary of the five command modes.

Mode: Main Function	Access and Exit Mode	Prompt
User EXEC: This is the first level of access. You can ping, telnet a remote device, and show some basic information.	<ul style="list-style-type: none"> Access <i>User EXEC</i> mode: Login successfully. Exit: exit to logout. Next mode: Type enable to enter <i>Privileged EXEC</i> mode. 	Switch>
Privileged EXEC: Allows you to view current configuration, reset the default values, reload the switch, show system information, save configuration and enter <i>Global Configuration</i> mode.	<ul style="list-style-type: none"> Access <i>Privileged EXEC</i> mode: Type enable in <i>User EXEC</i> mode. Exec: Type disable to exit to <i>User EXEC</i> mode. Type exit to logout. Next mode: Type configure terminal to enter <i>Global Configuration</i> mode. 	Switch#
Global Configuration: Configure all of the features that the ES7510-XT provides.	<ul style="list-style-type: none"> Access <i>Global Configuration</i> mode: Type configure terminal in <i>Privileged EXEC</i> mode. Exit: Type exit or end or press Ctrl-Z to exit. Next mode: Type interface IFNAME/ VLAN VID to enter <i>Interface Configuration</i> mode. 	Switch(config)#
Port Interface Configuration: Configure port related settings.	<ul style="list-style-type: none"> Access <i>Port Interface Configuration</i> mode: Type interface IFNAME in global configuration mode. Exit: Type exit or Ctrl+Z to <i>Global Configuration</i> mode. Type end to return to <i>Privileged EXEC</i> mode. 	Switch(config-if)#

Mode: Main Function	Access and Exit Mode	Prompt
VLAN Interface Configuration: Configure settings for a specific VLAN.	<ul style="list-style-type: none"> • Access <i>VLAN Interface Configuration</i> mode: Type interface VLAN VID in <i>Global Configuration</i> mode. • Exit: Type exit or Ctrl+Z to return to <i>Global Configuration</i> mode. • Type end to return to <i>Privileged EXEC</i> mode. 	Switch(config-vlan)#

The following are useful commands to save you typing time and to avoid typing errors.

Press ? to see all of the available commands in a mode. It helps you to see the next command you can type.

```
Switch(config)# interface (?)
  IFNAME      Interface's name
  vlan        Select a vlan to configure
```

Type a *Character?* (shown below) to see all of the available commands starting with this character.

```
Switch(config)# a?
  administrator  Administrator account setting
  arp             Set a static ARP entry
  auth           Authentication
```

Press the **Tab** key, which helps you to input the command quicker. If there is only one available command in the next, click the **Tab** key to help finish the typing.

```
Switch# co (tab) (tab)
Switch# configure terminal

Switch(config)# ad (tab)
Switch(config)# administrator
```

Key Combination	Function
Ctrl+C	To stop executing the unfinished command.
Ctrl+S	To lock the screen of the terminal - you cannot input any command.
Ctrl+Q	To unlock the screen which is locked by Ctrl+S .
Ctrl+Z	To exit <i>Configuration</i> mode.

Basic Settings (CLI)

The *Basic Setting* group provides you with the ability to configure switch information, IP address, User name/ Password of the system. It also allows you to do firmware upgrade, backup and restore configuration, reload factory default, and reboot the system.

Optionally, you can use the web user interface for configuration, see [Basic Settings](#) on Page 46.

This table provides detailed information about the CLI commands for basic settings.

Switch Setting	
System Name	Switch(config)# hostname DWORD Network name of this system Switch(config)# hostname ES7510-XT Switch(config)#
System Location	Switch(config)# snmp-server location Minnesota
System Contact	Switch(config)# snmp-server contact support@control.com
Display	Switch# show snmp-server name ES7510-XT Switch# show snmp-server location Minnesota Switch# show snmp-server contact support@control.com Switch> show version Hardware Information : Product Name : ES7510-XT MAC Address : 00C04E380002 Software Information : Loader Version : 1.4.1.5 Firmware Version : 2.0_b9-20130913-11:59:21 Switch# show hardware mac MAC Address: 00C04E380002
Admin Password	
User Name and Password	Switch(config)# administrator NAME Administrator account name Switch(config)# administrator admin PASSWORD Administrator account password Switch(config)# administrator admin admin Change administrator account admin and password admin success.
Display	Switch# show administrator Administrator account information name: admin password: admin

IP Configuration	
<p>IP Address/Mask (192.168.250.250, 255.255.255.0)</p> <p>The enabled bit of the subnet mask is used to represent the number displayed in the web user interface. For example, 8 represents: 255.0.0.0, 16 represents: 255.255.0.0, 24 represents: 255.255.255.0.</p>	<pre>Switch(config)# int vlan 1 Switch(config-if)# ip address dhcp Switch(config-if)# ip address 192.168.250.8/24 Switch(config-if)# ip dhcp client Switch(config-if)# ip dhcp client renew Switch(config-if)# ipv6 address ; IPv6 configuration X:X::X:X/M IPv6 address (e.g. 3ffe:506::1/48) Switch(config-if)# ipv6 address 3ffe:506::1/48</pre>
Gateway	<pre>Switch(config)# ip route 0.0.0.0/0 192.168.250.254/24</pre>
Remove Gateway	<pre>Switch(config)# no ip route 0.0.0.0/0 192.168.250.254/24</pre>
Display	<pre>Switch# show running-config ! interface vlan1 ip address 192.168.250.8/24 no shutdown ! ip route 0.0.0.0/0 192.168.250.254/24 !</pre>
Time Setting	
NTP Server	<pre>Switch(config)# ntp peer enable disable primary secondary Switch(config)# ntp peer primary IPADDR Switch(config)# ntp peer primary 192.168.250.250</pre>
Time Zone	<pre>Switch(config)# clock timezone 26 Sun Jan 1 04:13:24 2006 (GMT) Greenwich Mean Time: Dublin, Edinburgh, Lisbon, London</pre> <p>Note: By typing <code>clock timezone?</code>, you can see the timezone list. Then choose the number of the timezone you want to select.</p>
IEEE 1588	<pre>Switch(config)# ptpd run <cr> preferred-clock Preferred Clock slave Run as slave</pre>

Time Setting (Continued)	
Display	<pre>Switch # sh ntp associations Network time protocol Status: Disabled Primary peer: N/A Secondary peer: N/A Switch # show clock Sun Jan 1 04:14:19 2006 (GMT) Greenwich Mean Time: Dublin, Edinburgh, Lisbon, London Switch # show clock timezone clock timezone (26) (GMT) Greenwich Mean Time: Dublin, Edinburgh, Lisbon, London Switch# show ptpd PTPd is enabled Mode: Slave</pre>
DHCP Server	
DHCP Server configuration	<pre>Enable DHCP Server on ES7510-XT Switch Switch# Switch# configure terminal Switch(config)# router dhcp Switch(config-dhcp)# service dhcp Configure DHCP network address pool Switch(config-dhcp)#network 50.50.50.0/4 - (network/mask) Switch(config-dhcp)#default-router 50.50.50.1</pre>
Lease time configure	<pre>Switch(config-dhcp)#lease 300 (300 sec)</pre>
DHCP Relay Agent	<pre>Enable DHCP Relay Agent Switch# Switch# configure terminal Switch(config)# router dhcp Switch(config-dhcp)# service dhcp Switch(config-dhcp)# ip dhcp relay information option Enable DHCP Relay policy Switch(config-dhcp)# ip dhcp relay information policy <u>replace</u> drop Relay Policy keep Drop/Keep/Replace option 82 field replace Switch(config-dhcp)# ip dhcp relay information option <cr> circuit-id Configure Circuit-ID remote-id Configure Remote-ID Switch(config-dhcp)# ip dhcp relay information option option Option82 Switch(config-dhcp)# ip dhcp relay information option</pre>

DHCP Server (Cont.)	
Show DHCP server information	<pre>Switch# show ip dhcp server statistics DHCP Server ON Address Pool 1 network:192.168.17.0/24 default-router:192.168.17.254 lease time:300 Excluded Address List IP Address ----- (list excluded address) Manual Binding List IP Address MAC Address ----- (list IP & MAC binding entry) Leased Address List IP Address MAC Address Leased Time Remains ----- (list leased Time remain information for each entry)</pre>
DHCP Commands	<pre>Switch(config)# router dhcp Switch(config-dhcp)# default-router DHCP Default Router end Exit current mode and down to previous enable mode exit Exit current mode and down to previous mode ip IP protocol lease DHCP Lease Time list Print command list network dhcp network no Remove quit Exit current mode and down to previous mode service Enable service</pre>
DHCP Server Enable	<pre>Switch(config-dhcp)# service dhcp</pre>
DHCP Server IP Pool (Network/Mask)	<pre>Switch(config-dhcp)# network A.B.C.D/M network/mask ex. 10.10.1.0/24 Switch(config-dhcp)# network 192.168.10.0/24</pre>
DHCP Server – Default Gateway	<pre>Switch(config-dhcp)# default-router A.B.C.D address Switch(config-dhcp)# default-router 192.168.10.254</pre>
DHCP Server – lease time	<pre>Switch(config-dhcp)# lease TIME second Switch(config-dhcp)# lease 1000 (1000 second)</pre>
DHCP Server – Excluded Address	<pre>Switch(config-dhcp)# ip dhcp excluded-address A.B.C.D IP address Switch(config-dhcp)# ip dhcp excluded-address 192.168.10.123 <cr></pre>

DHCP Server (Cont.)	
DHCP Server – Static IP and MAC binding	<pre>Switch(config-dhcp)# ip dhcp static MACADDR MAC address Switch(config-dhcp)# ip dhcp static 00C0.4E38.0001 A.B.C.D leased IP address Switch(config-dhcp)# ip dhcp static 00C0.4E38.0001 192.168.10.99</pre>
DHCP Relay – Enable DHCP Relay	<pre>Switch(config-dhcp)# ip dhcp relay information option Option82 policy Option82 Switch(config-dhcp)# ip dhcp relay information option</pre>
DHCP Relay – DHCP policy	<pre>Switch(config-dhcp)# ip dhcp relay information policy drop Relay Policy keep Drop/Keep/Replace option82 field replace Switch(config-dhcp)# ip dhcp relay information policy drop Switch(config-dhcp)# ip dhcp relay information policy keep Switch(config-dhcp)# ip dhcp relay information policy replace</pre>
DHCP Relay – IP Helper Address	<pre>Switch(config-dhcp)# ip dhcp helper-address A.B.C.D Switch(config-dhcp)# ip dhcp helper-address 192.168.10.200</pre>
Reset DHCP Settings	<pre>Switch(config-dhcp)# ip dhcp reset</pre>
Backup and Restore	
Backup Startup Configuration File	<pre>Switch# copy startup-config tftp: 192.168.250.33/ default.conf Writing Configuration [OK]</pre> <p>Note: To backup the latest startup configuration file, you should save current settings to flash first. You can refer to Save to Flash on Page 134 to see how to save settings to the flash.</p> <p><i>In the example above, 192.168.250.33 is the TFTP server's IP and default.conf is name of the configuration file. Your environment may use different IP addresses or different file name. Type target TFTP server IP or file name in this command.</i></p>
Restore Configuration	<pre>Switch# copy tftp: 192.168.250.33/default.conf startup-config</pre>
Show Startup Config	<pre>Switch# show startup-config</pre>
Show Running Config	<pre>Switch# show running-config</pre>

Port Configuration (CLI)

The Port Configuration group allows you to enable/disable port state, or configure port auto-negotiation, speed, duplex, flow control, rate limit control, and port aggregation settings. It also allows you to view port status and aggregation information.

Optionally, you can use the web user interface for configuration, see [Port Configuration](#) on Page 66.

This table provides detailed information about the CLI commands for port configuration.

Port Control	
Port Control – State	<pre>Switch(config-if)# shutdown -> Disable port state Port1 Link Change to DOWN interface fastethernet1 is shutdown now.</pre>
	<pre>Switch(config-if)# no shutdown -> Enable port state Port1 Link Change to DOWN Port1 Link Change to UP interface fastethernet1 is up now.</pre>
	<pre>Switch(config-if)# Port1 Link Change to UP Switch(config)# sfp ddm Digital diagnostic and monitoring eject Eject SFP scan Scan SFP Switch(config)# sfp ddm enable Enable DDM disable Disable DDM</pre>
Port Control – Auto Negotiation	<pre>Switch(config)# interface fa1 Switch(config-if)# auto-negotiation Auto-negotiation of port 1 is enabled!</pre>
Port Control – Force Speed/ Duplex	<pre>Switch(config-if)# speed 100 Port1 Link Change to DOWN set the speed mode ok! Switch(config-if)# Port1 Link Change to UP Switch(config-if)# duplex full set the duplex mode ok!</pre>
Port Control – Flow Control	<pre>Switch(config-if)# flowcontrol on Flowcontrol on for port 1 set ok! Switch(config-if)# flowcontrol off Flowcontrol off for port 1 set ok!</pre>

Port Control (cont.)	
Port Status	<pre>Switch# show interface fa1 Interface fastethernet1 Administrative Status : Enable Operating Status : Connected Duplex : Full Speed : 100 Flow Control :off Default Port VLAN ID: 1 Ingress Filtering : Disabled Acceptable Frame Type : All Port Security : Disabled Auto Negotiation : Disable Loopback Mode : None STP Status: forwarding Default CoS Value for untagged packets is 0. Mdx mode is Disable. Medium mode is Copper.</pre> <pre>Switch# show sfp ddm →show SFP DDM information Port 9 Temperature:N/A Tx power:N/A Rx power:N/A Port 10 Temperature:64.00 C <range :0.0-80.00> Tx power:-6.0 dBm <range : -9.0 - -4.0> Rx power:-30.0 dBm <range: -30.0 - -4.0></pre> <p>Note: <i>Administrative Status -> Port state of the port. Operating status -> Current status of the port. Duplex -> Duplex mode of the port. Speed -> Speed mode of the port. Flow control -> Flow Control status of the port.</i></p>
Rate Control	
Rate Control – Ingress or Egress	<pre>Switch(config-if)# rate-limit egress Outgoing packets ingress Incoming packets</pre> <p>Note: <i>To enable rate control, you should select the Ingress or Egress rule first; then assign the packet type and bandwidth.</i></p>

Rate Control (continued)	
Rate Control – Filter Packet Type	<pre>Switch(config-if)# rate-limit ingress mode all Limit all frames broadcast Limit Broadcast frames flooded-unicast Limit Broadcast, Multicast and flooded unicast frames multicast Limit Broadcast and Multicast frames Switch(config-if)# rate-limit ingress mode broadcast Set the ingress limit mode broadcast ok.</pre>
Display – LACP	<pre>Switch# show lacp internal LACP group 1 is inactive LACP group 2 is inactive LACP group 3 is inactive LACP group 4 is inactive LACP group 5 is inactive LACP group 6 is inactive LACP group 7 is inactive LACP group 8 is inactive</pre>
Display – Trunk	<pre>Switch# show trunk group 1 FLAGS: I -> Individual P -> In channel D -> Port Down Trunk Group GroupID Protocol Ports -----+-----+----- 1 LACP 8(D) 9(D) 10(D) Switch# show trunk group 2 FLAGS: I -> Individual P -> In channel D -> Port Down Trunk Group GroupID Protocol Ports -----+-----+----- 2 Static 6(D) 7(P) Switch#</pre>

Power over Ethernet (CLI)

Power over Ethernet is one of the key features of ES7510-XT. It is fully IEEE 802.3af compliant, and supports IEEE 802.3at, including two-event and LLDP classification. The ES7510-XT supports up to 8Port PoE injectors in Port 1 to Port 8, each port with the ability to deliver 30W of power.

For more information or to use the web user interface, see [Power over Ethernet](#) on Page 74.

This table provides detailed information about the CLI commands for PoE control.

PoE System Status	
Display	<pre>Switch# show poe interface Status of interface pd-detect Status of PD status detection schedule Status of PoE schedule system Status of poe system Switch# show poe system PoE System PoE Admin : Enable PoE Hardware : Normal PoE Input Voltage : Vmain 1 : 48.3 V Output power : 10.1 Watts Temperature 1 : 43 degree C Power information : Emergency power : Primary : DC1(48 V), DC2(48 V) Secondary : N/A Tertiary : N/A Power Budget : Managed Budget : DC Power 1 : 0 Watts DC Power 2 : 120 Watts (In Use) Total : 120 Watts in Use Power Budget Warning Level : 75 % Utilization : 8 % Event : Normal</pre>
PoE PD Detection	
Status	<pre>Switch# show poe pd-detect PD Status Detection Status : Enabled Host 1 : Target IP : 192.168.250.100 Cycle Time : 10 Host 2 : Target IP : 192.168.250.200 Cycle Time : 20</pre>

PoE Schedule	
Display Status	<pre>Switch# show poe schedule [IFNAME] Inteface name Switch# show poe schedule fa1 Interface fastethernet1 PoE Schedule Status : Disabled Weekly Schedule : Sunday : All day disable Monday : 6,7,8,9,10,11,12,13,14,15,16,17,18 Tuesday : 6,7,8,9,10,11,12,13,14,15,16,17,18 Wednesday : 6,7,8,9,10,11,12,13,14,15,16,17,18 Thursday : 6,7,8,9,10,11,12,13,14,15,16,17,18 Friday : 6,7,8,9,10,11,12,13,14,15,16,17,18 Saturday : All day disable</pre>
Set PoE Powering Mode	
802.3af	<pre>Switch> enable Switch# config term Switch(config)# interface fa1 Switch(config-if)# poe budget Configure the power budget of power over ethernet control-mode PoE control mode powering-mode PoE powering mode priority Port priority schedule Configure the schdule of day type String to indicate the type of powered device user Port control in user mode Switch(config-if)# poe powering-mode 802.3af 802.3af powering mode forced forced powering mode 802.3at 802.3at powering mode Switch(config)# poe powering-mode 802.3af</pre>

Set PoE Powering Mode (cont.)	
Forced Powering Mode	<pre>Switch> enable Switch# config term Switch(config)# interface fa1 Switch(config-if)# poe powering-mode forced</pre>
802.3at 2-event	<pre>Switch> enable Switch# config term Switch(config)# interface fa1 Switch(config-if)# poe powering-mode 802.3at 2-event 2-event physical layer classification lldp Data link layer classification Switch(config-if)# poe powering-mode 802.3at 2-event</pre>
802.3at lldp	<pre>Switch> enable Switch# config term Switch(config)# interface fa1 Switch(config-if)# poe powering-mode 802.3at 2-event 2-event physical layer classification lldp Data link layer classification Switch(config-if)# poe powering-mode 802.3at lldp</pre>
Set Control Mode on Port/Schedule	
Set PoE Port to User Mode	<pre>Switch> enable Switch# config term Switch(config)# interface fa1 Switch(config-if)# poe control-mode schedule Schedule mode user User mode Switch(config-if)# poe control-mode user</pre>
Schedule	<pre>Switch> enable Switch# config term Switch(config)# interface fa1 Switch(config-if)# poe control-mode schedule Schedule mode user User mode Switch(config-if)# poe control-mode schedule</pre>
Enable/Disable PoE Function in User Mode	
Enable	<pre>Switch> enable Switch# config term Switch(config)# interface fa1 Switch(config-if)# poe user disable Disables the poe for the port enable Enables the poe for the port Switch(config-if)# poe user enable</pre>
Disable	<pre>Switch(config-if)# poe user disable</pre>

Port Type String	
Set	<pre>Switch> enable Switch# config term Switch(config)# interface fa1 Switch(config-if)# poe type TYPE Type string, maximum 20 characters Switch> enable Switch# config term Switch(config)# interface fa1 Switch(config-if)# poe type IPCam-1</pre>
Set Port Budget	
Set Power Consumption (Max) to 12W	<pre>Switch> enable Switch# config term Switch(config)# interface fa1 Switch(config-if)# poe budget [POWER] 0.4 - 32 Watts warning Warning water level Switch(config-if)# poe budget [POWER] 0.4 - 32 Watts warning Warning water level Switch(config-if)# poe budget 12</pre>
PoE Budget Warning (%)	
Set	<pre>Switch> enable Switch# config term Switch(config)# interface fa1 Switch(config-if)# poe budget [POWER] 0.4 - 32 Watts warning Warning water level Switch(config-if)# poe budget warning <0-100> 0 is disable, valid range is 1 to 100 percentage Switch(config-if)# poe budget warning 60</pre>
PoE Priority	
Set	<pre>Switch> enable Switch# config term Switch(config)# interface fa1 Switch(config-if)# poe priority critical Hightest priority level high High priority level low Low priority level Switch(config-if)# poe priority critical</pre>

PoE Schedule Weekday Hour	
Enable Hour 1, 3, 5 and 10 to 23 on Sunday	<pre>Switch> enable Switch# config term Switch(config)# interface fa1 Switch(config-if)# poe schedule <0-6> Weekday: valid range 0-6 (0=Sun, 1=Mon..., 6=Sat) Switch(config-if)# poe schedule 0 1,3,5,10-23</pre>
Disable Sunday Schedule	<pre>Switch(config-if)# no poe schedule 0</pre>
PoE Budget DC1/DC2	
Set	<pre>Switch(config)# poe disable Disables power over ethernet enable Enables power over ethernet budget Configure the power budget of power over ethernet pd-detect Configure PD status detection Switch(config)# poe budget DC1 Power source : DC 1 DC2 Power source : DC 2 managed Manage the power budget function of power source is unmanaged Unmanage the power budget function of power source vin Input voltage warning Warning water level Switch(config)# poe budget DC1 120</pre>
PoE PD Detect	
Enable	<pre>Switch> enable Switch# config term Switch(config)# poe disable Disables power over ethernet enable Enables power over ethernet budget Configure the power budget of power over ethernet pd-detect Configure PD status detection Switch(config)# poe pd-detect disable Disable PD status detection enable Enable PD status detection A.B.C.D PD IP address Switch(config)# poe pd-detect enable</pre>
Disable	<pre>Switch(config)# poe pd_detect disable</pre>
PoE PD Detect Cycle Time	
Ping 20 Sec, Re-enable PoE	<pre>Switch(config)# poe pd_detect 192.160.1.2 20</pre>

Network Redundancy (CLI)

It is critical for industrial applications that the network remains running at all times. The ES7510-XT supports:

- Standard Rapid Spanning Tree Protocol (STP) and Rapid Spanning Tree Protocol (RSTP)
The ES7510-XT supports RSTP versions IEEE 802.1D-2004, IEEE 802.1D-1998 STP, and IEEE 802.1w RSTP.
- Multiple Spanning Tree Protocol (MSTP)
MSTP implements IEEE 802.1s, which uses RSTP for rapid convergence, enables VLANs to be grouped into a spanning-tree instance, with each instance having a spanning-tree topology independent of other spanning-tree instances. This architecture provides multiple forwarding paths for data traffic, enables load balancing, and reduces the number of spanning-tree instances required to support a large number of VLANs. MSTP was originally defined in the IEEE 802.1s and later merged into the IEEE 802.1Q-2003 specification.
- Redundant Ring
The Redundant Ring features 0 ms for restore and about 5 ms for fail over for copper.
- Rapid Dual Homing (RDH)
Advanced RDH technology allows the ES7510-XT to connect with a core managed switch easily and conveniently. With RDH technology, you can also couple several Rapid Super Rings or RSTP groups together, which is also known as Auto Ring Coupling.

Optionally, you can use the web user interface for configuration, see [Network Redundancy](#) on Page 79.

This table provides detailed information about the CLI command lines for network redundancy.

Global (STP, RSTP, and MSTP)	
Enable	Switch(config)# spanning-tree enable
Disable	Switch(config)# spanning-tree disable
Mode	Switch(config)# spanning-tree mode rst the rapid spanning-tree protocol (802.1w) stp the spanning-tree prtotcol (802.1d) mst the multiple spanning-tree protocol (802.1s) Switch(config)# spanning-tree mode Switch(config)# spanning-tree mode mst Spanning-Tree Mode change to be MSTP (802.1s) Switch(config)# spanning-tree mode stp Spanning-Tree Mode change to be STP(802.1d) . Switch(config)# spanning-tree mode rst Spanning-Tree Mode change to be RSTP(802.1w) . Switch(config)# spanning-tree mode mst Spanning-Tree Mode change to be MSTP(802.1s) .
Bridge Priority	Switch(config)# spanning-tree priority <0-61440> the value of bridge priority in multiple of 4096 Switch(config)# spanning-tree priority 4096
Bridge Times	Switch(config)# spanning-tree bridge-times (forward Delay) (max-age) (Hello Time) Switch(config)# spanning-tree bridge-times 15 20 2 <i>This command allows you configure all the timing in one time.</i>

Global (STP, RSTP, and MSTP) (Cont.)	
Forward Delay	<pre>Switch(config)# spanning-tree forward-time <4-30> the value of forward delay time in seconds Switch(config)# spanning-tree forward-time 15</pre>
Max Age	<pre>Switch(config)# spanning-tree max-age <6-40> the value of message maximum age time in seconds Switch(config)# spanning-tree max-age 20</pre>
Hello Time	<pre>Switch(config)# spanning-tree hello-time <1-10> the value of hello time in seconds Switch(config)# spanning-tree hello-time 2</pre>
MSTP	
Enter the MSTP Configuration Tree	<pre>Switch(config)# spanning-tree mst MSTMAP the mst instance number or range configuration enter mst configuration mode forward-time the forward delay time hello-time the hello time max-age the message maximum age time max-hops the maximum hops sync sync port state of exist vlan entry Switch(config)# spanning-tree mst configuration Switch(config)# spanning-tree mst configuration Switch(config-mst)# abort exit current mode and discard all changes end exit current mode, change to enable mode and apply all changes exit exit current mode and apply all changes instance the mst instance list Print command list name the name of mst region no Negate a command or set its defaults quit exit current mode and apply all changes revision the revision of mst region show show mst configuration</pre>
Region Configuration	<pre>Region Name: Switch(config-mst)# name NAME the name string Switch(config-mst)# name control Region Revision: Switch(config-mst)# revision <0-65535> the value of revision Switch(config-mst)# revision 65535</pre>
Mapping Instance to VLAN (Ex: Mapping VLAN 2 to Instance 1)	<pre>Switch(config-mst)# instance <1-15> target instance number Switch(config-mst)# instance 1 vlan VLANMAP target vlan number(ex.10) or range(ex.1-10) Switch(config-mst)# instance 1 vlan 2</pre>

MSTP (cont.)	
Display Current MST Configuration	<pre>Switch(config-mst)# show current Current MST configuration Name [control] Revision 65535 Instance Vlans Mapped ----- 0 1,4-4094 1 2 2 3 ----- Config HMAC-MD5 Digest: 0xB41829F9030A054FB74EF7A8587FF58D -----</pre>
Remove Region Name	<pre>Switch(config-mst)# no name name configure revision revision configure instance the mst instance Switch(config-mst)# no name</pre>
Remove Instance example	<pre>Switch(config-mst)# no instance <1-15> target instance number Switch(config-mst)# no instance 2</pre>
Show Pending MST Configuration	<pre>Switch(config-mst)# show pending Pending MST configuration Name [] (->The name is removed by no name) Revision 65535 Instance Vlans Mapped ----- 0 1,3-4094 1 2 (->Instance 2 is removed by no instance 2) ----- Config HMAC-MD5 Digest: 0x3AB68794D602FDF43B21C0B37AC3BCA8 -----</pre>
Apply the setting and go to the configuration mode	<pre>Switch(config-mst)# quit apply all mst configuration changes Switch(config)#</pre>
Apply the setting and go to the global mode	<pre>Switch(config-mst)# end apply all mst configuration changes Switch#</pre>

MSTP (Continued)	
<p>Abort the Setting and go to the configuration mode.</p> <p>Show Pending to see the new settings are not applied.</p>	<pre>Switch(config-mst)# abort discard all mst configuration changes Switch(config)# spanning-tree mst configuration Switch(config-mst)# show pending Pending MST configuration Name [control] (->The name is not applied after Abort settings.) Revision 65535 Instance Vlans Mapped ----- 0 1,4-4094 1 2 2 3 (-> The instance is not applied after Abort settings.) ----- Config HMAC-MD5 Digest: 0xAC36177F50283CD4B83821D8AB26DE62 -----</pre>
RSTP	
System RSTP Setting	The mode should be rstp, timings can be configured in the global settings listed in the previous examples.
Port Configuration Mode	
Port Configuration	<pre>Switch(config)# interface fa1 Switch(config-if)# spanning-tree bpdufilter a secure BPDU process on edge-port interface bpduguard a secure response to invalid configurations (received BPDU sent by self) cost change an interface's spanning-tree port path cost edge-port interface attached to a LAN segment that is at the end of a bridged LAN or to an end node link-type the link type for the Rapid Spanning Tree mst the multiple spanning-tree port-priority the spanning tree port priority stp-state the bridge port STP state</pre>
Port Path Cost	<pre>Switch(config-if)# spanning-tree cost <1-200000000> 16-bit based value range from 1-65535, 32-bit based value range from 1-200,000,000 Switch(config-if)# spanning-tree cost 200000</pre>
Port Priority	<pre>Switch(config-if)# spanning-tree port-priority <0-240> Number from 0 to 240, in multiple of 16 Switch(config-if)# spanning-tree port-priority 128</pre>
Link Type - Auto	Switch(config-if)# spanning-tree link-type auto
Link Type - P2P	Switch(config-if)# spanning-tree link-type point-to-point

Port Configuration Mode (Continued)	
Link Type – Share	Switch(config-if)# spanning-tree link-type shared
Edge Port	Switch(config-if)# spanning-tree edge-port enable Switch(config-if)# spanning-tree edge-port disable
MSTP Port Configuration	Switch(config-if)# spanning-tree mst MSTMAP cost <1-200000000> the value of mst instance port cost Switch(config-if)# spanning-tree mst MSTMAP port-priority <0-240> the value of mst instance port priority in multiple of 16
Global Information	
Active Information	<pre>Switch# show spanning-tree active Spanning-Tree : Enabled Protocol : MSTP Root Address : 00C0.4E38.0001 Priority : 32768 Root Path Cost : 0 Root Port : N/A Root Times : max-age 20, hello-time 2, forward-delay 15 Bridge Address : 00C0.4E38.0001 Priority : 32768 Bridge Times : max-age 20, hello-time 2, forward-delay 15 BPDU transmission-limit : 3 Port Role State Cost Prio.Nbr Type Aggregated ----- fa1 Designated Forwarding 200000 128.1 P2P(RSTP) N/A fa2 Designated Forwarding 200000 128.2 P2P(RSTP) N/A</pre>
RSTP Summary	<pre>Switch# show spanning-tree summary Spanning-Tree : Enabled Protocol : MSTP Root Address : 00c0.4e38.004f Priority : 32768 Root Path Cost : 400000 Root Port : 10 Root Times : max-age 20, hello-time 2, forward-delay 15 Bridge Address 00c0.4e38.0001 Priority : 32768 Bridge Times : max-age 20, hello-time 2, forward-delay 15 BPDU transmission-limit : 3 BPDU Skewing Detection : Disabled Backbonefast : Disabled Topology Change Flag : False Topology Change Detected Flag : False Topology Change Count : 571 Last Topology Change from : 0000.0000.0000 Timers: hello 0, topology change 0 Summary of connected spanning tree ports : Port-State Summary Blocking Listening Learning Forwarding Disabled ----- 1 0 0 1 8 Port Link-Type Summary AutoDetected PointToPoint SharedLink EdgePort ----- 10 0 0 8</pre>

Global Information (Continued)	
Port Info	<pre> Switch# show spanning-tree summary Spanning-Tree : Enabled Protocol : MSTP Root Address : 0014.7c42.3aa0 Priority : 32768 Root Path Cost : 420000 Root Port : 10 Root Times : max-age 20, hello-time 2, forward-delay 15 Bridge Address 00c0.4e38.0002 Priority : 32768 Bridge Times : max-age 20, hello-time 2, forward-delay 15 BPDU transmission-limit : 3 BPDU Skewing Detection : Disabled Backbonefast : Disabled Topology Change Flag : False Topology Change Detected Flag : False Topology Change Count : 129 Last Topology Change from : 0000.0000.0000 Timers: hello 0, topology change 0 Summary of connected spanning tree ports : Port-State Summary Blocking Listening Learning Forwarding Disabled ----- - 1 0 0 1 8 Port Link-Type Summary AutoDetected PointToPoint SharedLink EdgePort ----- - 10 0 0 8 </pre>
MSTP Information	
MSTP Configuration	<pre> Switch# show spanning-tree mst configuration Current MST configuration (MSTP is Running) Name [comtrol] Revision 65535 Instance Vlans Mapped ----- - 0 1,4-4094 1 2 2 3 ----- - Config HMAC-MD5 Digest: 0xAC36177F50283CD4B83821D8AB26DE62 ----- - </pre>
Display all MST Information	<pre> Switch# show spanning-tree mst ##### MST00 vlans mapped: 1-4094 Bridge address 00c0.4e38.0002 priority 32768 (sysid 0) Root address 0014.7c42.3aa0 priority 32768 (sysid 0) port 10 path cost 420000 Regional root this switch Operational max-age 2, hello-time 15, forward-delay 20 Configured max-age 2, hello-time 15, forward-delay 20, max-hops 20 Port Role State Cost Prio.Nbr Type ----- - gi9 Alternate Blocking 20000 128.9 P2P Bound(RSTP) gi10 Root Forwarding 20000 128.10 P2P Bound(RSTP) </pre>

MSTP Information (Continued)	
MSTP Root Information	<pre>Switch# show spanning-tree mst root MST Root Root Root Root Max Hello Fwd Instance Address Priority Cost Port age dly ----- MST00 00C0.4E38.0001 32768 0 N/A 20 2 15 MST01 00C0.4E38.0001 32768 0 N/A 20 2 15 MST02 00C0.4E38.0001 32768 0 N/A 20 2 15</pre>
MSTP Instance Information	<pre>Switch# show spanning-tree mst 1 ##### MST01 vlans mapped: 2 Bridge address 00C0.4E38.0001 priority 32768 (sysid 1) Root this switch for MST01 Port Role State Cost Prio.Nbr Type ----- fa1 Designated Forwarding 200000 128.1 P2P Internal (MSTP) fa2 Designated Forwarding 200000 128.2 P2P Internal (MSTP)</pre>
MSTP Port Information	<pre>Switch# show spanning-tree mst interface fa1 Interface fastethernet1 of MST00 is Designated Forwarding Edge Port : Edge (Edge) BPDU Filter : Disabled Link Type : Auto (Point-to-point) BPDU Guard : Disabled Boundary : Internal (MSTP) BPDUs : sent 6352, received 0 Instance Role State Cost Prio.Nbr Vlans mapped ----- 0 Designated Forwarding 200000 128.1 1,4-4094 1 Designated Forwarding 200000 128.1 2 2 Designated Forwarding 200000 128.1 3</pre>

Redundant Ring	
Create or configure a Ring	<pre>Switch(config)# redundant-ring 1 Ring 1 created Switch(config-redundant-ring)#</pre> <p>Note: 1 is the target Ring ID which is going to be created or configured.</p>
Super Ring Version	<pre>Switch(config-redundant-ring)# version default set default to Redundant ring rapid-super-ring rapid super ring super-ring super ring</pre> <pre>Switch(config-redundant-ring)# version rapid-super-ring</pre>
Priority	<pre>Switch(config-redundant-ring)# priority <0-255> valid range is 0 to 255 default set default</pre> <pre>Switch(config-redundant-ring)# super-ring priority 100</pre>
Ring Port	<pre>Switch(config-redundant-ring)# port IFLIST Interface list, ex: fa1,fa3-5 cost path cost</pre> <pre>Switch(config-redundant-ring)# port fa1,fa2</pre>
Ring Port Cost	<pre>Switch(config-redundant-ring)# port cost <0-255> valid range is 0 or 255 default set default (128)valid range is 0 or 255</pre> <pre>Switch(config-redundant-ring)# port cost 100 <0-255> valid range is 0 or 255 default set default (128)valid range is 0 or 255</pre> <pre>Switch(config-redundant-ring)# port cost 100 200 Set path cost success.</pre>
Rapid Dual Homing	<pre>Switch(config-redundant-ring)# rapid-dual-homing enable</pre> <pre>Switch(config-redundant-ring)# rapid-dual-homing disable</pre> <pre>Switch(config-redundant-ring)# rapid-dual-homing port IFLIST Interface name, ex: fa1 auto-detect Uplink auto detection IFNAME Interface name, ex: fa1</pre> <pre>Switch(config-redundant-ring)# rapid-dual-homing port 3,5-6 set Rapid Dual Homing port success.</pre> <p>Note: Auto-detect is recommended for Dual Homing.</p>

Ring Info	
Ring Info	<pre>Switch# show redundant-ring [Ring ID] [Ring1] Ring1 Current Status : Disabled Role : Disabled Ring Status : Abnormal Ring Manager : 0000.0000.0000 Blocking Port : N/A Giga Copper : N/A Configuration : Version : Super Ring Priority : 128 Ring Port : fa1, fa2 Path Cost : 100, 200 Dual-Homing II : Disabled Statistics : Watchdog sent 0, received 0, missed 0 Link Up sent 0, received 0 Link Down sent 0, received 0 Role Transition count 0 Ring State Transition count 1 Ring ID is optional. If the ring ID is typed, this command only displays the information of the target Ring.</pre>

VLAN (CLI)

A Virtual LAN (VLAN) is a logical grouping of nodes for the purpose of limiting a broadcast domain to specific members of a group without physically grouping the members. The VLAN allows you to isolate network traffic so that only members of the VLAN could receive traffic from the same VLAN members. Basically, creating a VLAN from a switch is the logical equivalent of physically reconnecting a group of network devices to another Layer 2 switch, without actually disconnecting these devices from their original switches.

The ES7510-XT supports IEEE 802.1Q VLAN, which is also known as Tag-Based VLAN. This Tag-Based VLAN allows a VLAN to be created across different switches. IEEE 802.1Q tag-based VLAN makes use of VLAN control information stored in a VLAN header attached to IEEE 802.3 packet frames. This tag contains a VLAN Identifier (VID) that indicates which VLAN a frame belongs to. Since each switch only has to check a frame's tag, without the need to dissect the contents of the frame, this also saves a lot of computing resources within the switch.

Optionally, you can use the web user interface for configuration, see [VLAN](#) on Page 93.

The following table provides detailed information about command lines for the VLAN.

VLAN Port Configuration	
VLAN Port PVID	Switch(config-if)# switchport trunk native vlan 2 Set port default vlan id to 2 success
Port Accept Frame Type	Switch(config)# inter fa1 Switch(config-if)# acceptable frame type all any kind of frame type is accepted! Switch(config-if)# acceptable frame type vlantaggedonly only vlan-tag frame is accepted!
Ingress Filtering (for Fast Ethernet Port 1)	Switch(config)# interface fa1 Switch(config-if)# ingress filtering enable ingress filtering enable Switch(config-if)# ingress filtering disable ingress filtering disable
Egress rule – Untagged (for VLAN 2)	Switch(config-if)# switchport access vlan 2 switchport access vlan - success
Egress rule – Tagged (for VLAN 2)	Switch(config-if)# switchport trunk allowed vlan add 2
Display – Port Ingress Rule (PVID, Ingress Filtering, Acceptable Frame Type)	Switch# show interface fa1 Interface fastethernet1 Administrative Status : Enable Operating Status : Not Connected Duplex : Auto Speed : Auto Flow Control :off Default Port VLAN ID: 2 Ingress Filtering : Disabled Acceptable Frame Type : All Port Security : Disabled Auto Negotiation : Enable Loopback Mode : None STP Status: disabled Default CoS Value for untagged packets is 0. Mdix mode is Auto. Medium mode is Copper.

VLAN Port Configuration (continued)	
Display – Port Egress Rule (Egress rule, IP address, status)	<pre>Switch# show running-config ! interface fastethernet1 switchport access vlan 1 switchport access vlan 3 switchport trunk native vlan 2 interface vlan1 ip address 192.168.250.8/24 no shutdown</pre>
VLAN Configuration	
Create VLAN (2)	<pre>Switch(config)# vlan 2 vlan 2 success Switch(config)# interface vlan 2 Switch(config-if)#</pre> <p>Note: <i>In the CLI configuration, you should first create a VLAN interface. Then you can start to add/remove ports. The default status of the created VLAN is unused until you add member ports to it.</i></p>
Remove VLAN	<pre>Switch(config)# no vlan 2 no vlan success</pre> <p>Note: <i>You can only remove the VLAN when the VLAN is in unused mode.</i></p>
VLAN Name	<pre>Switch(config)# vlan 2 vlan 2 has exists Switch(config-vlan)# name v2 Switch(config-vlan)# no name</pre> <p>Note: <i>Use no name to change the name to default name, VLAN VID.</i></p>
VLAN description	<pre>Switch(config)# interface vlan 2 Switch(config-if)# Switch(config-if)# description this is the VLAN 2 Switch(config-if)# no description ->Delete the description.</pre>
IP address of the VLAN	<pre>Switch(config)# interface vlan 2 Switch(config-if)# Switch(config-if)# ip address 192.168.250.18/24 Switch(config-if)# no ip address 192.168.250.8/24 ->Delete the IP address</pre>
Create multiple VLANs (VLAN 5-8)	<pre>Switch(config)# interface vlan 5-8</pre>
Shutdown VLAN	<pre>Switch(config)# interface vlan 2 Switch(config-if)# shutdown Switch(config-if)# no shutdown ->Turn on the VLAN</pre>

VLAN Configuration (continued)	
Display – VLAN table	<pre>Switch# sh vlan VLAN Name Status Trunk Ports Access Ports ----- 1 VLAN1 Static - 1-,gi9-102 VLAN2 Unused - 3 test Static fa4-8,gi9-10 fa1-3,fa7,gi9-10</pre>
Display – VLAN interface information	<pre>Switch# show interface vlan1 interface vlan1 is up, line protocol detection is disabled index 14 metric 1 mtu 1500 <UP,BROADCAST,RUNNING,MULTICAST> HWaddr: 00:c0:4e:ff:01:b0 inet 192.168.250.100/24 broadcast 192.168.250.255 input packets 639, bytes 38248, dropped 0, multicast packets 0 input errors 0, length 0, overrun 0, CRC 0, frame 0, fifo 0, missed 0 output packets 959, bytes 829280, dropped 0 output errors 0, aborted 0, carrier 0, fifo 0, heartbeat 0, window 0 collisions 0</pre>
GVRP Configuration	
GVRP enable/disable	<pre>Switch(config)# gvrp mode disable Disable GVRP feature globally on the switch enable Enable GVRP feature globally on the switch Switch(config)# gvrp mode enable Gvrp is enabled on the switch!</pre>
Configure GVRP timer	<pre>Switch(config)# inter fa1 Switch(config-if)# garp timer <10-10000></pre>
Join timer /Leave timer/ LeaveAll timer	<pre>Switch(config-if)# garp timer 20 60 1000</pre> <p>Note: The unit of this timer is centiseconds.</p>
Management VLAN	
Management VLAN	<pre>Switch(config)# int vlan 1 (Go to management VLAN) Switch(config-if)# no shutdown</pre>
Display	<pre>Switch# show running-config ... ! interface vlan1 ip address 192.168.250.17/24 ip igmp no shutdown ! ...</pre>

Private VLAN (CLI)

A private VLAN helps to resolve the primary VLAN ID shortage, client ports' isolation and network security issues. The Private VLAN features provides primary and secondary VLANs within a single switch.

Primary VLAN: The uplink port is usually a member of the primary VLAN. A primary VLAN contains promiscuous ports that can communicate with Secondary VLANs.

Secondary VLAN: The client ports are usually defined within secondary VLAN. The secondary VLAN includes Isolated and Community VLANs. The client ports can be isolated VLANs or can be grouped in the same Community VLAN. The ports within the same community VLAN can communicate with each other, however, the isolated VLAN ports cannot.

Optionally, you can use the web user interface for configuration, see [Private VLAN](#) on Page 98.

The following table provides detailed information about command lines for private VLAN port configuration, VLAN configuration, and VLAN table display.

Private VLAN Configuration	
Create VLAN	<pre>Switch(config)# vlan 2 vlan 2 success Switch(config-vlan)# end End current mode and change to enable mode exit Exit current mode and down to previous mode list Print command list name Assign a name to vlan no no private-vlan Configure a private VLAN</pre>
Private VLAN Type	<p><i>Go to the VLAN you want configure first.</i></p> <pre>Switch(config)# vlan (VID)</pre>
Choose the Types	<pre>Switch(config-vlan)# private-vlan community Configure the VLAN as an community private VLAN isolated Configure the VLAN as an isolated private VLAN primary Configure the VLAN as a primary private VLAN</pre>
Primary Type	<pre>Switch(config-vlan)# private-vlan primary <cr></pre>
Isolated Type	<pre>Switch(config-vlan)# private-vlan isolated <cr></pre>
Community Type	<pre>Switch(config-vlan)# private-vlan community <cr></pre>

Private VLAN Port Configuration	
Go to the port configuration	<pre>Switch(config)# interface (port_number, ex: fa1) Switch(config-if)# switchport private-vlan host-association Set the private VLAN host association mapping map primary VLAN to secondary VLAN</pre>
Private VLAN Port Type	<pre>Switch(config-if)# switchport mode private-vlan Set private-vlan mode Switch(config-if)# switchport mode private-vlan host Set the mode to private-vlan host promiscuous Set the mode to private-vlan promiscuous Switch(config-if)# switchport mode private-vlan promiscuous <cr></pre>
Promiscuous Port Type	<pre>Switch(config-if)# switchport mode private-vlan host <cr></pre>
Host Port Type	
Private VLAN Port Configuration PVLAN Port Type	<pre>Switch(config)# interface fa1 Switch(config-if)# switchport mode private-vlan host</pre>
Host Association primary to secondary (The command is only available for host port.)	<pre>Switch(config-if)# switchport private-vlan host-association <2-4094> Primary range VLAN ID of the private VLAN port association Switch(config-if)# switchport private-vlan host-association 2 <2-4094> Secondary range VLAN ID of the private VLAN port association Switch(config-if)# switchport private-vlan host-association 2 3</pre>
Mapping primary to secondary VLANs (This command is only available for promiscuous port)	<pre>Switch(config)# interface fa1 Switch(config-if)# switchport mode private-vlan promiscuous Switch(config-if)# switchport private-vlan mapping 2 add 3 Switch(config-if)# switchport private-vlan mapping 2 add 4 Switch(config-if)# switchport private-vlan mapping 2 add 5</pre>
Private VLAN Information	
Private VLAN Information	<pre>Switch# show vlan private-vlan FLAGS: I -> Isolated P -> Promiscuous C -> Community Primary Secondary Type Ports ----- 2 3 Isolated fa1(P), fa2(I) 2 4 Community fa2(P), fa3(C) 2 5 Community fa2(P), fa1(C), fa3(I) 10 - - -</pre>

Private VLAN Information (Continued)	
Running Config Information	<pre>Switch# show run Building configuration... Current configuration: hostname Switch vlan learning independent ! vlan 1 ! vlan 2 private-vlan primary ! vlan 3 private-vlan isolated ! vlan 4 private-vlan community ! vlan 5 private-vlan community ! interface fastethernet7 switchport access vlan add 2,5 switchport trunk native vlan 5 switchport mode private-vlan host switchport private-vlan host-association 2 5 ! interface fastethernet switchport access vlan add 2,4 switchport trunk native vlan 4 switchport mode private-vlan host switchport private-vlan host-association 2 4 ! interface gigabitethernet9 switchport access vlan add 2,5 switchport trunk native vlan 5 switchport mode private-vlan host switchport private-vlan host-association 2 3 ! interface gigabitethernet10 switchport access vlan add 2,5 switchport trunk native vlan 2 switchport mode private-vlan promiscuous switchport private-vlan mapping 2 add 3-5</pre>
Private VLAN Type	
Private VLAN Port Information	

Private VLAN Information (Continued)	
PVLAN Type	Switch# show vlan private-vlan type
	Vlan Type Ports

	2 primary fa3
	3 isolated fa2
	4 community fa1
5 community fa4,fa5	
10 primary -	
Host List	Switch# show vlan private-vlan port-list
	Ports Mode Vlan

	1 normal -
	2 normal -
	3 normal -
	4 normal -
	5 normal -
	6 normal -
	7 host 5
	8 host 4
9 host 3	
10 promiscuous 2	

Traffic Prioritization (CLI)

Quality of Service (QoS) provides a traffic prioritization mechanism which allows you to deliver better service to certain flows. QoS can also help to alleviate congestion problems and ensure high-priority traffic is delivered first. This section allows you to configure Traffic Prioritization settings for each port with regard to setting priorities.

ES7510-XT QoS supports four physical queues, weighted fair queuing (WRR) and Strict Priority scheme, that follows the IEEE 802.1p COS tag and IPv4 TOS/DiffServ information to prioritize the traffic of your industrial network.

Optionally, you can use the web user interface for configuration, see [Traffic Prioritization](#) on Page 103. This table provides detailed information about command lines for traffic prioritization configuration

QoS Setting	
Queue Scheduling – Strict Priority	<pre>Switch(config)# qos queue-sched sp Strict Priority wrr Weighted Round Robin (Use an 8,4,2,1 weight) Switch(config)# qos queue-sched sp <cr></pre>
Queue Scheduling - WRR	<pre>Switch(config)# qos queue-sched wrr</pre>
Port Setting – CoS (Default Port Priority)	<pre>Switch(config)# interface fa1 Switch(config-if)# qos cos DEFAULT-COS Assign an priority (7 highest) Switch(config-if)# qos cos 7 The default port CoS value is set 7 ok.</pre> <p>Note: When change the port setting, you should select the specific port first. <i>fa1</i> means <i>Fast Ethernet port 1</i>.</p>
Port Setting – Trust Mode- CoS Only	<pre>Switch(config)# interface fa1 Switch(config-if)# qos trust cos The port trust is set CoS only ok.</pre>
Port Setting – Trust Mode- CoS First	<pre>Switch(config)# interface fa1 Switch(config-if)# qos trust cos-first The port trust is set CoS first ok.</pre>
Port Setting – Trust Mode- DSCP Only	<pre>Switch(config)# interface fa1 Switch(config-if)# qos trust dscp The port trust is set DSCP only ok.</pre>
Port Setting – Trust Mode- DSCP First	<pre>Switch(config)# interface fa1 Switch(config-if)# qos trust dscp-first The port trust is set DSCP first ok.</pre>
Display – Queue Scheduling	<pre>Switch# show qos queue-sched QoS queue scheduling scheme : Weighted Round Robin (Use an 8,4,2,1 weight)</pre>

QoS Setting (cont.)	
Display – Port Setting - Trust Mode	<pre>Switch# show qos trust QoS Port Trust Mode : Port Trust Mode -----+----- 1 DSCP first 2 COS only 3 COS only 4 COS only 5 COS only 6 COS only 7 COS only 8 COS only 9 COS only 10 COS only</pre>
Display – Port Setting – CoS (Port Default Priority)	<pre>Switch# show qos port-cos Port Default Cos : Port CoS -----+----- 1 7 2 0 3 0 4 0 5 0 6 0 7 0 8 0 9 0 10 0</pre>
CoS-Queue Mapping	
Format	<pre>Switch(config)# qos cos-map PRIORITY Assign an priority (7 highest) Switch(config)# qos cos-map 1 QUEUE Assign an queue (0-3) Format: qos cos-map priority_value queue_value.</pre>
Map CoS 0 to Queue 1	<pre>Switch(config)# qos cos-map 0 1 The CoS to queue mapping is set ok.</pre>
Map CoS 1 to Queue 0	<pre>Switch(config)# qos cos-map 1 0 The CoS to queue mapping is set ok.</pre>
Map CoS 2 to Queue 0	<pre>Switch(config)# qos cos-map 2 0 The CoS to queue mapping is set ok.</pre>
Map CoS 3 to Queue 1	<pre>Switch(config)# qos cos-map 3 1 The CoS to queue mapping is set ok.</pre>
Map CoS 4 to Queue 2	<pre>Switch(config)# qos cos-map 4 2 The CoS to queue mapping is set ok.</pre>
Map CoS 5 to Queue 2	<pre>Switch(config)# qos cos-map 5 2 The CoS to queue mapping is set ok.</pre>
Map CoS 6 to Queue 3	<pre>Switch(config)# qos cos-map 6 3 The CoS to queue mapping is set ok.</pre>
Map CoS 7 to Queue 3	<pre>Switch(config)# qos cos-map 7 3 The CoS to queue mapping is set ok.</pre>

CoS-Queue Mapping (cont.)	
Display – CoS-Queue mapping	<pre>Switch# sh qos cos-map CoS to Queue Mapping : CoS Queue ---- + ----- 0 1 1 0 2 0 3 1 4 2 5 2 6 3 7 3</pre>
DSCP-Queue Mapping	
Format	<pre>Switch(config)# qos dscp-map PRIORITY Assign an priority (63 highest) Switch(config)# qos dscp-map 0 QUEUE Assign an queue (0-3) Format: qos dscp-map priority_value queue_value.</pre>
Map DSCP 0 to Queue 1	<pre>Switch(config)# qos dscp-map 0 1 The TOS/DSCP to queue mapping is set ok.</pre>
Display – DSCO-Queue mapping	<pre>Switch# show qos dscp-map DSCP to Queue Mapping : (dscp = d1 d2) d2 0 1 2 3 4 5 6 7 8 9 d1 -----+----- 0 1 1 1 1 1 1 1 1 0 0 1 0 0 0 0 0 0 0 0 0 0 2 0 0 0 0 1 1 1 1 1 1 3 1 1 2 2 2 2 2 2 2 2 4 2 2 2 2 2 2 2 2 3 3 5 3 3 3 3 3 3 3 3 3 3 6 3 3 3 3</pre>

Multicast Filtering (CLI)

For multicast filtering, the ES7510-XT uses IGMP (Internet Group Management Protocol) Snooping technology. IGMP is an internet protocol that provides a way for internet device to report its multicast group membership to adjacent routers. Multicasting allows one computer on the internet to send data to a multitude of other computers that have identified themselves as being interested in receiving the originating computers data.

Multicasting is useful for such applications as updating the address books of mobile computer users in the field, sending out newsletters to a distribution list, and broadcasting streaming media to an audience that has tuned into the event by setting up multicast group membership.

In effect, IGMP Snooping manages multicast traffic by making use of switches, routers, and hosts that support IGMP. Enabling IGMP Snooping allows the ports to detect IGMP queries, report packets, and manage multicast traffic through the switch. IGMP has three fundamental types of messages, as shown in the following table.

Message	
Query	A message sent from the querier (an IGMP router or a switch) that asks for a response from each host that belongs to the multicast group.
Report	A message sent by a host to the querier to indicate that the host wants to be or is a member of a given group indicated in the report message.
Leave Group	A message sent by a host to the querier to indicate that the host has quit as a member of a specific multicast group.

You can enable **IGMP Snooping** and **IGMP Query** functions. This section illustrates the information of the IGMP Snooping function, including different multicast groups' VID and member ports, and IP multicast addresses that range from 224.0.0.0 to 239.255.255.255.

Optionally, you can use the web user interface for configuration, see [Multicast Filtering](#) on Page 107.

The following table provides detailed information about command lines for multicast filtering configuration.

IGMP Snooping	
IGMP Snooping - Global	Switch(config)# ip igmp snooping IGMP snooping is enabled globally. Specify on which vlans IGMP snooping enables
Disable IGMP Snooping - Global	Switch(config)# no ip igmp snooping IGMP snooping is disabled globally ok.

IGMP Snooping (Continued)	
Display – IGMP Snooping Setting	<pre>Switch# sh ip igmp interface vlan1 enabled: Yes version: IGMPv1 query-interval; 125s query-max-response-time: 10s Switch# sh ip igmp snooping IGMP snooping is globally enabled Vlan1 is IGMP snooping enabled Vlan2 is IGMP snooping enabled Vlan3 is IGMP snooping disabled</pre>
Display – IGMP Table	<pre>Switch# sh ip igmp snooping multicast all VLAN IP Address Type Ports ---- - 1 239.192.8.0 IGMP fa6, 1 239.255.255.250 IGMP fa6,</pre>
IGMP Query	
IGMP Query V1	<pre>Switch(config)# int vlan 1 Switch(config-if)# ip igmp v1</pre>
IGMP Query V2	<pre>Switch(config)# int vlan 1 Switch(config-if)# ip igmp</pre>
IGMP Query version	<pre>Switch(config-if)# ip igmp version 1 Switch(config-if)# ip igmp version 2</pre>
IGMP Query Interval	<pre>Switch(config)# int vlan 1 (Go to management VLAN) Switch(config-if)# ip igmp Switch(config-if)# ip igmp query-interval 60 (Change query interval to 60 seconds, default value is 125 seconds)</pre>
IGMP Query Max Response Time	<pre>Switch(config)# int vlan 1 (Go to management VLAN) Switch(config-if)# ip igmp Switch(config-if)# ip igmp query-max-response-time 15 (Change query max response time to 15 seconds, default value is 10 seconds)</pre>
Disable	<pre>Switch(config)# int vlan 1 Switch(config-if)# no ip igmp</pre>

IGMP Query (Continued)	
Display	<pre>Switch# sh ip igmp interface vlan1 enabled: Yes version: IGMPv2 query-interval: 125s query-max-response-time: 10s Switch# show running-config ... ! interface vlan1 ip address 192.168.250.17/24 ip igmp no shutdown !</pre>
Unknown Multicast	
Send Unknown Multicast to Query Ports	<pre>Switch(config)# ip igmp snooping source-only-learning IGMP Snooping Source-Only-Learning enabled</pre>
Send Unknown Multicast to All Ports	<pre>Switch(config)# no ip igmp snooping source-only-learning IGMP Snooping Source-Only-Learning disabled Switch(config)# no mac-address-table multicast filtering Flooding unknown multicast addresses ok!</pre>
Discard All Unknown Multicast	<pre>Switch(config)# mac-address-table multicast filtering Filtering unknown multicast addresses ok!</pre>

GMRP Configuration	
Enable GMRP globally	Switch(config)# gmrp mode enable Gmrp is enabled on the switch!
Disable GMRP globally	Switch(config)# gmrp mode disable Gmrp is disabled on the switch!
Enable GMRP on a port	Switch(config)# gmrp mode enable fa1 Gmrp enabled on port 1 !
Disable GMRP on a port	Switch(config)# gmrp mode disable fa2 Gmrp disabled on port 2 !
Display	Switch# sh gmrp GMRP global enabled port 1 : enabled port 2 : enabled port 3 : disabled port 4 : disabled port 5 : disabled port 6 : disabled port 7 : disabled port 8 : disabled port 9 : disabled port 10 : disabled
Force Filtering	
Enable	Switch(config)# mac-address-table force filtering Filtering unknown multicast addresses ok!
Disable	Switch(config)# no mac-address-table force filtering Flooding unknown multicast addresses ok!

SNMP (CLI)

Simple Network Management Protocol (SNMP) is a protocol used for exchanging management information between network devices. SNMP is a member of the TCP/IP protocol suite. The ES7510-XT supports SNMP v1 and v2c and V3.

An SNMP managed network consists of two main components: agents and a manager. An agent is a management software module that resides in a managed switch. An agent translates the local management information from the managed device into a SNMP compatible format. The manager is the console through the network.

Optionally, you can use the web user interface for configuration, see [SNMP](#) on Page 111.

The following table provides detailed information about command lines for SNMP configuration.

SNMP Community	
Read Only Community	Switch(config)# snmp-server community public ro community string add ok
Read Write Community	Switch(config)# snmp-server community private rw community string add ok
SNMP Trap	
Enable Trap	Switch(config)# snmp-server enable trap Set SNMP trap enable ok.
SNMP Trap Server IP without specific community name	Switch(config)# snmp-server host 192.168.250.33 SNMP trap host add OK.
SNMP Trap Server IP with version 1 and community	Switch(config)# snmp-server host 192.168.250.33 version 1 private SNMP trap host add OK. Note: Private is the community name, version 1 is the SNMP version.
SNMP Trap Server IP with version 2 and community	Switch(config)# snmp-server host 192.168.250.33 version 2 private SNMP trap host add OK.
Disable SNMP Trap	Switch(config)# no snmp-server enable trap Set SNMP trap disable ok.
Display	Switch# sh snmp-server trap SNMP trap: Enabled SNMP trap community: public Switch# show running-config snmp-server community public ro snmp-server community private rw snmp-server enable trap snmp-server host 192.168.250.33 version 2 admin snmp-server host 192.168.250.33 version 1 admin

Security (CLI)

The ES7510-XT provides several security features for you to secure your connection. Optionally, you can use the web user interface for configuration, see [Security](#) on Page 114. This table provides information about the command lines for security configuration.

Port Security	
Add MAC	Switch(config)# mac-address-table static 00c0.4e38.0101 vlan 1 interface fa1 mac-address-table unicast static set ok!
Port Security	Switch(config)# interface fa1 Switch(config-if)# switchport port-security Disables new MAC addresses learning and aging activities! Rule: Add the static MAC, VLAN and Port binding first, then enable the port security to stop new MAC learning.
Disable Port Security	Switch(config-if)# no switchport port-security Enable new MAC addresses learning and aging activities!
Display	Switch# show mac-address-table static Destination Address Address Type Vlan Destination Port ----- 00c0.4e38.0101 Static 1 fa1
IP Security	
IP Security	Switch(config)# ip security Set ip security enable ok. Switch(config)# ip security host 192.168.250.33 Add ip security host 192.168.250.33 ok.
Display	Switch# show ip security ip security is enabled ip security host: 192.168.250.33
Securing Interfaces	
Display	Switch# show service Telnet : Disabled Http : Disabled NetVision : Disabled
Telnet	Switch(config)# service telnet enable
HTTP	Switch(config)# service http enable

802.1x	
enable	Switch(config)# dot1x system-auth-control Switch(config)#
disable	Switch(config)# no dot1x system-auth-control Switch(config)#
authentic-method	Switch(config)# dot1x authentic-method local Use the local username database for authentication radius Use the Remote Authentication Dial-In User Service (RADIUS) servers for authentication Switch(config)# dot1x authentic-method radius Switch(config)#
radius server-ip	Switch(config)# dot1x radius Switch(config)# dot1x radius server-ip 192.168.250.120 key 1234 RADIUS Server Port number NOT given. (default=1812) RADIUS Accounting Port number NOT given. (default=1813) RADIUS Server IP : 192.168.250.120 RADIUS Server Key : 1234 RADIUS Server Port : 1812 RADIUS Accounting Port : 1813 Switch(config)#
radius secondary-server-ip	Switch(config)# dot1x radius secondary-server-ip 192.168.250.250 key 5678 Port number NOT given. (default=1812) RADIUS Accounting Port number NOT given. (default=1813) Secondary RADIUS Server IP : 192.168.250.250 Secondary RADIUS Server Key : 5678 Secondary RADIUS Server Port : 1812 Secondary RADIUS Accounting Port : 1813
User name/ password for authentication	Switch(config)# dot1x username chris passwd chris vlan 1

Warnings (CLI)

The ES7510-XT provides several types of warning features for you to remotely monitor the status of the attached devices or changes in your network. The features include Fault Relay, System Log and SMTP Email Alert.

Optionally, you can use the web user interface for configuration, see [Warning](#) on Page 121.

This table provides detailed information about the command lines of the warning configuration.

Fault Relay Output	
Relay Output	<pre>Switch(config)# relay 1 di DI State dry dry output ping ping failure port port link failure power power failure ring super ring failure</pre>
DI State	<pre>Switch(config)# relay 1 di 1 DI number Switch(config)# relay 1 di 1 high high is abnormal low low is abnormal Switch(config)# relay 1 di 1 high</pre>
Dry Output	<pre>Switch(config)# relay 1 dry <0-65535> turn on period in second Switch(config)# relay 1 dry 5 <0-65535> turn off period in second Switch(config)# relay 1 dry 5 5</pre>
Ping Failure	<pre>Switch(config)# relay 1 ping 192.168.250.33 <cr> reset reset a device Switch(config)# relay 1 ping 192.168.250.33 reset <1-65535> reset time Switch(config)# relay 1 ping 192.168.250.33 reset 60 <0-65535> hold time to retry Switch(config)# relay 1 ping 192.168.250.33 reset 60 60</pre>
Port Link Failure	<pre>Switch(config)# relay 1 port PORTLIST port list Switch(config)# relay 1 port fa1-5</pre>
Power Failure	<pre>Switch(config)# relay 1 power <1-2> power id Switch(config)# relay 1 power 1 Switch(config)# relay 1 power 2</pre>
Power Failure	<pre>Switch(config)# relay 1 power <1-2> power id any Anyone power failure asserts relay Switch(config)# relay 1 power 1 Switch(config)# relay 1 power 2</pre>
Ring Failure	<pre>Switch(config)# relay 1 ring</pre>

Fault Relay Output (cont.)	
Disable Relay	<pre>Switch(config)# no relay 1 relay id Switch(config)# no relay 1 <cr></pre>
Display	<pre>Switch# show relay 1 Relay Output Type : Port Link Port : 1, 2, 3, 4</pre>
Event Selection	<pre>Switch(config)# warning-event coldstart Switch cold start event warmstart Switch warm start event linkdown Switch link down event linkup Switch link up event authentication Authentication failure event di Switch di event fault-relay Switch fault relay event loop-protect Switch loop protection event poe-powering Switch PoE powering or unpowered event power Switch power failure event sfpSwitch SFP event ring Switch ring event sfp Switch sfp event time-sync Switch time synchronize event</pre>
Example: Cold Start event	<pre>Switch(config)# warning-event coldstart Set cold start event enable ok.</pre>
Example: Link Up event	<pre>Switch(config)# warning-event linkup [IFNAME] Interface list, ex: fastethernet1fa1,fa3-5 or gi9 Switch(config)# warning-event linkup fastethernet1 Set fa5 link up event enable ok.</pre>
Display	<pre>Switch# show warning-event Warning Event: Cold Start: Enabled Warm Start: Disabled Authentication Failure: Disabled Link Down: fa4-5 Link Up: fa4-5 Power Failure: Ring: Disabled Fault Relay: Disabled Time synchronize Failure: Disabled PoE Powering: fa1-4 SFP: Enabled</pre>

Syslog Configuration	
Local Mode	Switch(config)# log syslog local
Server Mode	Switch(config)# log syslog remote 192.168.250.33
Both	Switch(config)# log syslog local Switch(config)# log syslog remote 192.168.250.33
Disable	Switch(config)# no log syslog local
SMTP Configuration	
SMTP Enable	Switch(config)# smtp-server enable email-alert SMTP Email Alert set enable ok.
Sender mail	Switch(config)# smtp-server server 192.168.250.100 ACCOUNT SMTP server mail account, ex: admin@control.com Switch(config)# smtp-server server 192.168.250.100 admin@control.com SMTP Email Alert set Server: 192.168.250.100, Account: admin@control.com ok.
Receiver mail	Switch(config)# smtp-server receipt 1 abc@control.com SMTP Email Alert set receipt 1: abc@control.com ok.
Authentication with user name and password	Switch(config)# smtp-server authentication username admin password admin SMTP Email Alert set authentication Username: admin, Password: admin Note: You can assign string to user name and password.
Disable SMTP	Switch(config)# no smtp-server enable email-alert SMTP Email Alert set disable ok.
Disable Authentication	Switch(config)# no smtp-server authentication SMTP Email Alert set Authentication disable ok.
Display	Switch# sh smtp-server SMTP Email Alert is Enabled Server: 192.168.250.100, Account: admin@control.com Authentication: Enabled Username: admin, Password: admin SMTP Email Alert Receipt: Receipt 1: abc@control.com Receipt 2: Receipt 3: Receipt 4:

Monitor and Diag (CLI)

The ES7510-XT provides several types of features for you to monitor the status of the switch or diagnostic for you to check the problem when encountering problems related to the switch. The features include MAC Address Table, Port Statistics, Port Mirror, Event Log, and Ping.

Optionally, you can use the web user interface for configuration, see [Monitor and Diag](#) on Page 126.

This table provides detailed information about command lines of the Monitor and Diag configuration.

MAC Address Table	
Aging Time	<pre>Switch(config)# mac-address-table aging-time 350 mac-address-table aging-time set ok!</pre> <p>Note: The default aging timeout value is 300.</p>
Add Static Unicast MAC address	<pre>Switch(config)# mac-address-table static 00c0.4e38.0101 vlan 1 interface fastethernet5 mac-address-table ucast static set ok!</pre> <p>Rule: mac-address-table static MAC_address VLAN VID interface interface_name</p>
Add Multicast MAC address	<pre>Switch(config)# mac-address-table multicast 00c0.4e38.0101 vlan 1 interface fa3-4 Adds an entry in the multicast table ok!</pre> <p>Rule: mac-address-table multicast MAC_address VLAN VID interface_list interface_name/range</p>
Show MAC Address Table – All types	<pre>Switch# show mac-address-table ***** UNICAST MAC ADDRESS ***** Destination Address Address Type Vlan Destination Port ----- 00c0.4e38.ca3b Dynamic 1 fa1 00c0.4e38.0386 Dynamic 1 fa2 00c0.4e38.0101 Static 1 fa3 00c0.4e38.0102 Static 1 fa3 00c0.4e38.0100 Management 1 ***** MULTICAST MAC ADDRESS ***** Vlan Mac Address COS Status Ports ---- 1 00c0.4e38.0800 0 fa6 1 00c0.4e38.ffffa 0 fa4,fa6</pre>
Show MAC Address Table – Dynamic Learnt MAC addresses	<pre>Switch# show mac-address-table dynamic Destination Address Address Type Vlan Destination Port ----- 00c0.4e38.ca3b Dynamic 1 fa4 00c0.4e38.0386 Dynamic 1 fa6</pre>
Show MAC Address Table – Multicast MAC addresses	<pre>Switch# show mac-address-table multicast Vlan Mac Address COS Status Ports ---- 1 00c0.4e38.0800 0 fa5-6 1 00c0.4e38.ffffa 0 af3,fa5-6</pre>

MAC Address Table (continued)	
<p>Show MAC Address Table – Static MAC addresses</p>	<pre>Switch# show mac-address-table static Destination Address Address Type Vlan Destination Port ----- 00c0.4e38.0101 Static 1 fa4 00c0.4e38.0102 Static 1 fa5</pre>
<p>Show Aging timeout time</p>	<pre>Switch# show mac-address-table aging-time the mac-address-table aging-time is 300 sec.</pre>
Port Statistics	
<p>Port Statistics</p>	<pre>Switch# show rmon statistics fa4 (select interface) Interface fastethernet4 is enable connected, which has Inbound: Good Octets: 178792, Bad Octets: 0 Unicast: 598, Broadcast: 1764, Multicast: 160 Pause: 0, Undersize: 0, Fragments: 0 Oversize: 0, Jabbers: 0, Discards: 0 Filtered: 0, RxError: 0, FCSError: 0 Outbound: Good Octets: 330500 Unicast: 602, Broadcast: 1, Multicast: 2261 Pause: 0, Deferred: 0, Collisions: 0 SingleCollision: 0, MultipleCollision: 0 ExcessiveCollision: 0, LateCollision: 0 Filtered: 0, FCSError: 0 Number of frames received and transmitted with a length of: 64: 2388, 65to127: 142, 128to255: 11 256to511: 64, 512to1023: 10, 1024toMaxSize: 42</pre>
Port Mirroring	
<p>Enable Port Mirror</p>	<pre>Switch(config)# mirror en Mirror set enable ok.</pre>
<p>Disable Port Mirror</p>	<pre>Switch(config)# mirror disable Mirror set disable ok.</pre>
<p>Select Source Port</p>	<pre>Switch(config)# mirror source fa1-2 both Received and transmitted traffic rx Received traffic tx Transmitted traffic Switch(config)# mirror source fa1-2 both Mirror source fa1-2 both set ok. Note: Select source port list and TX/RX/Both mode.</pre>
<p>Select Destination Port</p>	<pre>Switch(config)# mirror destination fa6 Mirror destination fa6 set ok</pre>

Port Mirroring (continued)	
Display	<pre>Switch# show mirror Mirror Status : Enabled Ingress Monitor Destination Port : fa6 Egress Monitor Destination Port : fa6 Ingress Source Ports :fa1,fa2, Egress Source Ports :fa1,fa2,</pre>
Event Log	
Display	<pre>Switch# show event-log <1>Jan 1 02:50:47 snmpd[101]: Event: Link 4 Down. <2>Jan 1 02:50:50 snmpd[101]: Event: Link 5 Up. <3>Jan 1 02:50:51 snmpd[101]: Event: Link 5 Down. <4>Jan 1 02:50:53 snmpd[101]: Event: Link 4 Up.</pre>
Topology Discovery (LLDP)	
Enable LLDP	<pre>Switch(config)# lldp holdtime Specify the holdtime of LLDP in seconds run Enable LLDP timer Set the transmission frequency of LLDP in seconds Switch(config)# lldp run LLDP is enabled!</pre>
Change LLDP timer	<pre>Switch(config)# lldp holdtime <10-255> Valid range is 10~255 Switch(config)# lldp timer <5-254> Valid range is 5~254</pre>
Ping	
Ping IP	<pre>Switch# ping 192.168.11.14 PING 192.168.11.14 (192.168.11.14): 56 data bytes 64 bytes from 192.168.11.14: icmp_seq=0 ttl=128 time=0.0 ms 64 bytes from 192.168.11.14: icmp_seq=1 ttl=128 time=0.0 ms 64 bytes from 192.168.11.14: icmp_seq=2 ttl=128 time=0.0 ms 64 bytes from 192.168.11.14: icmp_seq=3 ttl=128 time=0.0 ms 64 bytes from 192.168.11.14: icmp_seq=4 ttl=128 time=0.0 ms --- 192.168.11.14 ping statistics --- packets transmitted, 5 packets received, 0% packet loss round-trip min/avg/max = 1.3/1.3/1.4 ms</pre>

Saving to Flash (CLI)

Save Configuration allows you to save any configuration you just made to the flash. Powering off the switch without saving the configuration causes loss of the new settings.

Saving to Flash	
Save to Flash	SWITCH# write Building Configuration... [OK] Switch# copy running-config startup-config Building Configuration... [OK]

Logging Out (CLI)

The CLI connection logs out of configure terminal mode, if you do not input any command after 30 seconds.

Logging Out	
Logout	SWITCH> exit SWITCH# exit

Service (CLI)

The service command provides the ability to disable HTTP and Telnet.

Note: *There is not a web user interface page for the service command.*

Service	
Disable HTTP	Switch(config)# service http disable Switch(config)#
Enable HTTP	Switch(config)# service http enable Switch(config)#
Disable telnet	Switch(config)# service telnet disable Switch(config)#
Enable telnet	Switch(config)# service telnet enable Switch(config)#

Complete CLI List

This section provides the complete listing of RocketLinux ES7510-XT commands with the supporting options:

- [User EXEC Mode](#)
- [Privileged EXEC Mode](#) on Page 196
- [Global Configuration Mode](#) on Page 201
- [Port Interface Configuration Mode](#) on Page 206
- [VLAN Interface Configuration Mode](#) on Page 208

User EXEC Mode

For information about accessing *User EXEC* mode, see [User EXEC Mode](#) on Page 195.

```
Switch> list
  enable
  exit
  list
  ping A.B.C.D
  ping WORD
  ping X:X::X:X
  quit
  show arp
  show gvrp statistics [IFNAME]
  show ip forwarding
  show ip route
  show ip route A.B.C.D
  show ip route A.B.C.D/M
  show ip route supernets-only
  show version
  telnet WORD
  telnet WORD PORT
  traceroute WORD
```

Privileged EXEC Mode

For information about accessing Privileged EXEC mode, see [Privileged EXEC Mode](#) on Page 196.

```
Switch# list
archive download-boot /overwrite tftp IPADDRESS IMAGE
archive download-sw /overwrite tftp IPADDRESS IMAGE
clear event-log
clear gvrp statistics [IFNAME]
clear lacp counters
clear mac-address-table dynamic
clear mac-address-table dynamic address MACADDR
clear mac-address-table dynamic interface IFNAME
clear mac-address-table dynamic vlan VLANID
clear redundant-ring statistics [0-31]
clear rmon statistics [IFNAME]
clear spanning-tree counters
clear spanning-tree counters interafce IFNAME
clear spanning-tree detected-protocols
clear spanning-tree detected-protocols interface IFNAME
clock set TIME MONTH DAY YEAR
configure terminal
copy running-config startup-config
copy startup-config tftp: URL
copy tftp: URL (ssh-dss|ssh-rsa)
copy tftp: URL ssl-cert
copy tftp: URL startup-config
debug dot1x all
debug dot1x errors
debug dot1x events
debug dot1x packets
debug dot1x registry
debug dot1x state-machine
debug gmrp
debug gvrp (all|rcv|tx|gvrp_event|vlan_event)
debug ip dhcp (all|event)
debug ip dhcp snooping
debug ip igmp
debug ip igmp snooping (all|group|management|router|timer)
debug l2 mac (all|trace|debug)
debug lacp (all|event|fsm|misc|packet)
debug lldp
debug poe (all|trace|debug)
debug proto pdu
debug ptpd all
debug rate-limit
debug redundant-ring (pdu|trace|debug|rapid-dual-homing|rstp|multi-ring|all) <0-31>
debug snmp
debug spanning-tree (all|bpdu|config|events|general|root|sync|tc)
debug trunk
debug vlan (all|trace|debug)
disable
dot1x initialize interface IFNAME
```

Privileged EXEC Mode (continued)

```
dot1x reauthenticate interface IFNAME
end
exit
hardware sensor (enable|disable)
list
no debug dot1x all
no debug dot1x errors
no debug dot1x events
no debug dot1x packets
no debug dot1x registry
no debug dot1x state-machine
no debug gmrp
no debug gvrp (all|rcv|tx|gvrp_event|vlan_event)
no debug ip dhcp (all|event)
no debug ip dhcp snooping
no debug ip igmp
no debug ip igmp snooping (all|group|management|router|timer)
no debug l2 mac (all|trace|debug)
no debug lacp (all|event|fsm|misc|packet)
no debug lldp
no debug poe (all|trace|debug)
no debug proto
no debug ptpd
no debug rate-limit
no debug redundant-ring <0-31>
no debug snmp
no debug spanning-tree (all|bpdu|config|events|general|root|sync|tc)
no debug trunk
no debug vlan (all|trace|debug)
no pager
pager
ping A.B.C.D
ping WORD
ping X:X::X:X
quit
reboot
reload default-config file
reload default-ssh file
reload default-ssl file
show acceptable frame type [IFNAME]
show administrator
show arp
show auth radius
show clock
show clock summer-time
show clock timezone
show debugging dot1x
show debugging gvrp
show debugging ip dhcp
show debugging ip igmp
show debugging ip igmp snooping
show debugging lacp
```

Privileged EXEC Mode (continued)

```
show debugging snmp
show debugging spanning-tree
show deny host mac-address
show dot1q-tunnel
show dot1x
show dot1x all
show dot1x authentic-method
show dot1x info
show dot1x interface IFNAME
show dot1x radius
show dot1x statistics interface IFNAME
show dot1x username
show ethertype
show event-log
show garp timer [IFNAME]
show gmrp
show gvrp configuration [IFNAME]
show gvrp portstate IFNAME VID
show hardware flash
show hardware led
show hardware mac
show ingress filtering [IFNAME]
show interface [IFNAME]
show ip dhcp relay
show ip dhcp server statistics
show ip forwarding
show ip igmp
show ip igmp group
show ip igmp interface IFNAME
show ip igmp query-interval
show ip igmp query-max-response-time
show ip igmp snooping
show ip igmp snooping multicast (dynamic|user|all) [VLANLIST]
show ip igmp snooping multicast count
show ip igmp snooping vlan (VLANLIST|all)
show ip igmp timers
show ip igmp version
show ip route
show ip route A.B.C.D
show ip route A.B.C.D/M
show ip route supernets-only
show ip security
show ipv6 neighbour
show ipv6 route
show l2_interface [IFNAME]
show lacp counters [GROUPID]
show lacp group [1-8]
show lacp internal [1-8]
show lacp neighbor [1-8]
show lacp port-setting [IFNAME]
show lacp system-id
show lacp system-priority
```

Privileged EXEC Mode (continued)

```
show lldp
show lldp neighbors
show lldp power remote IFNAME
show lldp statistics
show loop-protect
show mac-address-table
show mac-address-table aging-time
show mac-address-table dynamic
show mac-address-table dynamic address MACADDR
show mac-address-table dynamic interface IFNAME
show mac-address-table dynamic vlan VLANID
show mac-address-table multicast
show mac-address-table multicast MACADDR vlan VLANID
show mac-address-table multicast filtering
show mac-address-table static
show mac-address-table static address MACADDR
show mac-address-table static interface IFNAME
show mac-address-table static vlan VLANID
show mirror
show modbus
show nameserver
show netvision password
show ntp associations
show poe interface [IFNAME]
show poe pd-detect
show poe schedule [IFNAME]
show poe system
show ptpd
show qos cos-map
show qos dscp-map
show qos port-cos
show qos queue-sched
show qos trust
show rate-limit egress [IFNAME]
show rate-limit ingress [IFNAME]
show redundant-ring [0-31]
show relay 1
show relay 1 status
show rmon statistics [IFNAME]
show running-config
show service
show sfp
show sfp ddm
show smtp-server
show smtp-server authentication
show smtp-server email-alert
show smtp-server receipt
show smtp-server server
show snmp-server community
show snmp-server contact
show snmp-server host
show snmp-server info
```

Privileged EXEC Mode (continued)

```
show snmp-server location
show snmp-server name
show snmp-server trap
show snmp-server user
show spanning-tree active
show spanning-tree interface IFNAME
show spanning-tree mst
show spanning-tree mst <0-15>
show spanning-tree mst <0-15> interface IFNAME
show spanning-tree mst configuration
show spanning-tree mst interface IFNAME
show spanning-tree mst root
show spanning-tree summary
show startup-config
show system status
show trunk group [1-8]
show version
show vlan
show vlan (static|dynamic) [VLANID]
show vlan VLANID
show vlan management
show vlan name VLANNAME
show vlan private-vlan
show vlan private-vlan port-list
show vlan private-vlan type
show warning-event
telnet WORD
telnet WORD PORT
traceroute WORD
write
write file
write memory
write terminal
```

Global Configuration Mode

For information about accessing *Global Configuration mode*, see [Global Configuration Mode](#) on Page 201.

```
Switch(config)# list
administrator NAME PASSWORD
arp A.B.C.D H.H.H
clock set TIME MONTH DAY YEAR
clock summer-time (enable|disable)
clock summer-time <1-5> <0-6> <1-12> START_TIME <1-5> <0-6> <1-12> END_TIME
clock timezone
  (01|02|03|04|05|06|07|08|09|10|11|12|13|14|15|16|17|18|19|20|21|22|23|24|25|26|27
  |28|29|30|31|32|33|34|35|36|37|38|39|40|41|42|43|44|45|46|47|48|49|50|51|52|53|54
  |55|56|57|58|59|60|61|62|63|64|65|66|67|68|69|70|71|72|73|74)
default dot1x system-auth-control
default gvrp configuration
default ip igmp snooping
dot1x authentic-method (radius|local)
dot1x radius secondary-server-ip A.B.C.D key RADIUS_KEY [PORT] [PORT]
dot1x radius server-ip A.B.C.D key RADIUS_KEY [PORT] [PORT]
dot1x system-auth-control
dot1x username WORD passwd WORD vlan <1-4094>
end
ethertype [0x0800-0xFFFF]
exit
gmrp mode (enable|disable)
gmrp mode (enable|disable) IFNAME
gvrp mode (enable|disable)
gvrp mode (enable|disable) IFNAME
gvrp registration (normal|fixed|forbidden) IFNAME
hostname .DWORD
interface IFNAME
interface vlan VLAN-ID
ip forwarding
ip igmp snooping
ip igmp snooping immediate-leave
ip igmp snooping immediate-leave vlan (VLANLIST|all)
ip igmp snooping last-member-query-interval TIMEVALUE
ip igmp snooping last-member-query-interval TIMEVALUE vlan (VLANLIST|all)
ip igmp snooping source-only-learning
ip igmp snooping vlan (VLANLIST|all)
ip route A.B.C.D A.B.C.D (A.B.C.D|INTERFACE)
ip route A.B.C.D A.B.C.D (A.B.C.D|INTERFACE) <1-255>
ip route A.B.C.D/M (A.B.C.D|INTERFACE)
ip route A.B.C.D/M (A.B.C.D|INTERFACE) <1-255>
ip security
ip security host A.B.C.D
ipv6 route X:X::X:X/M (X:X::X:X|INTERFACE)
lacp group <1-8> IFLIST
lacp system-priority <1-65535>
list
lldp holdtime <10-255>
lldp run
lldp timer <5-254>
```

Global Configuration Mode (continued)

```
log file FILENAME
log stdout
log syslog local
log syslog remote A.B.C.D
loop-protect (enable|disable) IFLIST
loop-protect (enable|disable) all
loop-protect transmit-interval <1-10>
mac-address-table aging-time TIMEVALUE
mac-address-table multicast MACADDR vlan VLANID interface IFLIST
mac-address-table multicast filtering
mac-address-table static MACADDR vlan VLANID interface IFNAME
mirror (enable|disable)
mirror destination IFNAME (rx|tx|both)
mirror source IFLIST (rx|tx|both)
modbus (enable|disable)
modbus idle-timeout <200-10000>
modbus master <1-20>
modbus port <1-65535>
nameserver A.B.C.D
netvision password PASS
no administrator
no arp A.B.C.D
no clock set
no clock summer-time
no clock timezone
no dot1x authentic-method
no dot1x radius secondary-server-ip
no dot1x system-auth-control
no dot1x username WORD
no hostname [HOSTNAME]
no interface IFNAME
no interface vlan VLAN-ID
no ip forwarding
no ip igmp snooping
no ip igmp snooping immediate-leave
no ip igmp snooping immediate-leave vlan (VLANLIST|all)
no ip igmp snooping last-member-query-interval
no ip igmp snooping last-member-query-interval vlan (VLANLIST|all)
no ip igmp snooping source-only-learning
no ip igmp snooping vlan (VLANLIST|all)
no ip route A.B.C.D A.B.C.D (A.B.C.D|INTERFACE)
no ip route A.B.C.D A.B.C.D (A.B.C.D|INTERFACE) <1-255>
no ip route A.B.C.D/M (A.B.C.D|INTERFACE)
no ip route A.B.C.D/M (A.B.C.D|INTERFACE) <1-255>
no ip security
no ip security host A.B.C.D
no ipv6 route X:X::X:X/M (X:X::X:X|INTERFACE)
no lacp group <1-8>
no lacp system-priority
no lldp run
no log file
no log stdout
```

Global Configuration Mode (continued)

```
no log syslog local
no log syslog remote
no loop-protect transmit-interval
no mac-address-table aging-time
no mac-address-table multicast MACADDR vlan VLANID
no mac-address-table multicast MACADDR vlan VLANID interface IFLIST
no mac-address-table multicast filtering
no mac-address-table static MACADDR vlan VLANID interface IFNAME
no mirror destination (rx|tx|both)
no mirror source IFLIST (rx|tx|both)
no nameserver A.B.C.D
no netvision password
no ntp peer (primary|secondary)
no poe pd-detect A.B.C.D
no ptpd run
no qos cos-map
no qos dscp-map
no qos queue-sched
no relay 1
no relay 1 di
no relay 1 dry
no relay 1 ping
no relay 1 ping reset
no relay 1 port
no relay 1 power
no relay 1 ring
no smtp-server authentication
no smtp-server authentication username password
no smtp-server enable email-alert
no smtp-server receipt <1-4>
no smtp-server server
no snmp-server community WORD (ro|rw)
no snmp-server community trap
no snmp-server contact
no snmp-server enable trap
no snmp-server host A.B.C.D [VERSION]
no snmp-server location
no snmp-server name
no snmp-server user WORD v3
no spanning-tree bridge-times
no spanning-tree forward-time
no spanning-tree hello-time
no spanning-tree max-age
no spanning-tree mst MSTMAP priority
no spanning-tree mst configuration
no spanning-tree mst forward-time
no spanning-tree mst hello-time
no spanning-tree mst max-age
no spanning-tree mst max-hops
no spanning-tree priority
no spanning-tree transmission-limit
no trunk group <1-8>
```

Global Configuration Mode (continued)

```
no vlan [VLANID]
no warning-event (coldstart|warmstart)
no warning-event (linkdown|linkup) [IFLIST]
no warning-event authentication
no warning-event di 1
no warning-event fault-relay
no warning-event loop-protect
no warning-event poe-powering [IFLIST]
no warning-event power <1-2>
no warning-event ring
no warning-event sfp
no warning-event time-sync
no write-config (daemon|integrated)
ntp peer (enable|disable)
ntp peer (primary|secondary) IPADDRESS
poe (enable|disable)
poe budget (DC1|DC2) <0-80>
poe budget vin (DC1|DC2) <46-57>
poe budget warning <0-100>
poe pd-detect (enable|disable)
poe pd-detect A.B.C.D <10-3600>
ptpd run
ptpd run preferred-clock
ptpd run slave
qos cos-map PRIORITY QUEUE
qos dscp-map PRIORITY QUEUE
qos queue-sched (wrr|sp)
redundant-ring <0-31>
relay 1 di 1 (high|low)
relay 1 dry <0-65535> <0-65535>
relay 1 ping WORD
relay 1 ping WORD reset <1-65535> <0-65535>
relay 1 port PORTLIST
relay 1 power <1-2>
relay 1 power any
relay 1 ring
router dhcp
service http (enable|disable)
service telnet (enable|disable)
sfp ddm (enable|disable) all
sfp eject all
sfp scan all
smtp-server authentication
smtp-server authentication username WORD password WORD
smtp-server enable email-alert
smtp-server receipt <1-4> EMAIL
smtp-server server A.B.C.D ACCOUNT
snmp-server community WORD (ro|rw)
snmp-server community trap WORD
snmp-server contact .DWORD
snmp-server enable trap
snmp-server host A.B.C.D
```

Global Configuration Mode (continued)

```
snmp-server host A.B.C.D version (1|2) [COMMUNITY]
snmp-server location .DWORD
snmp-server name .DWORD
snmp-server user WORD v3 auth (md5|sha) WORD
snmp-server user WORD v3 noauth
snmp-server user WORD v3 priv (md5|sha) WORD des WORD
spanning-tree (enable|disable)
spanning-tree bridge-times <4-30> <6-40> <1-10>
spanning-tree forward-time <4-30>
spanning-tree hello-time <1-10>
spanning-tree max-age <6-40>
spanning-tree mode (stp|rst)
spanning-tree mode mst
spanning-tree mst MSTMAP priority <0-61440>
spanning-tree mst configuration
spanning-tree mst forward-time <4-30>
spanning-tree mst hello-time <1-10>
spanning-tree mst max-age <6-40>
spanning-tree mst max-hops <1-40>
spanning-tree mst sync vlan <1-4094>
spanning-tree pathcost method (long|short)
spanning-tree priority <0-61440>
spanning-tree transmission-limit <1-10>
trunk group <1-8> IFLIST
vlan <1-4094>
vlan learning (independent|shared)
warning-event (coldstart|warmstart)
warning-event (linkdown|linkup) [IFLIST]
warning-event authentication
warning-event di 1
warning-event fault-relay
warning-event loop-protect
warning-event poe-powering [IFLIST]
warning-event power <1-2>
warning-event ring
warning-event sfp
warning-event time-sync
write-config (daemon|integrated)
```

Port Interface Configuration Mode

For information about accessing *Port Interface Configuration* mode, see [Port Interface Configuration Mode](#) on Page 206.

```
Switch(config)# interface fa1
Switch(config-if)# list
  acceptable frame type (all|vlantaggedonly)
  auto-negotiation
  description .LINE
  dot1x admin-control-direction (both|in)
  dot1x default
  dot1x guest-vlan <1-4094>
  dot1x host-mode (single-host|multi-host)
  dot1x max-req <1-10>
  dot1x port-control (auto|force-authorized|force-unauthorized)
  dot1x reauthentication
  dot1x timeout (reauth-period|quiet-period|tx-period|supp-timeout|server-timeout)
    TIMEVALUE
  duplex (half|full)
  end
  exit
  flowcontrol (off|on)
  garp join-timer <10-10000>
  garp leave-timer <30-30000>
  garp leaveall-timer <150-150000>
  ingress filtering (enable|disable)
  lacp port-priority <1-65535>
  lacp timeout (long|short)
  list
  loopback
  mdix auto
  mtu <64-9216>
  no description
  no dot1x admin-control-direction
  no dot1x guest-vlan
  no dot1x host-mode
  no dot1x max-req
  no dot1x port-control
  no dot1x reauthentication
  no dot1x timeout (reauth-period|quiet-period|tx-period|supp-timeout|server-
    timeout)
  no duplex
  no garp join-timer
  no garp leave-timer
  no garp leaveall-timer
  no lacp port-priority
  no lacp timeout
  no loopback
  no mdix auto
  no mtu
  no poe schedule <0-6>
  no qos cos
  no qos trust
```

Port Interface Mode (continued)

```

no rate-limit egress bandwidth
no rate-limit ingress bandwidth
no rate-limit ingress mode
no shutdown
no spanning-tree bpdufilter
no spanning-tree bpduguard
no spanning-tree cost
no spanning-tree edge-port
no spanning-tree link-type
no spanning-tree mst MSTMAP cost
no spanning-tree mst MSTMAP port-priority
no spanning-tree port-priority
no spanning-tree stp-state
no speed
no switchport access vlan VLANID
no switchport block
no switchport dot1q-tunnel mode (access|uplink)
no switchport mode private-vlan host
no switchport mode private-vlan promiscuous
no switchport port-security
no switchport private-vlan host-association
no switchport trunk native vlan
poe budget [POWER]
poe budget warning <0-100>
poe control-mode (user|schedule)
poe powering-mode (802.3af|forced)
poe powering-mode 802.3at (lldp|2-event)
poe priority (critical|high|low)
poe schedule <0-6> HOUR
poe type TYPE
poe user (enable|disable)
qos cos DEFAULT-COS
qos trust (cos|dscp|cos-first|dscp-first)
quit
rate-limit egress bandwidth <0-100>
rate-limit ingress bandwidth <0-100>
rate-limit ingress mode (all|flooded-unicast|multicast|broadcast)
sfp ddm (enable|disable)
sfp eject
sfp scan
shutdown
spanning-tree bpdufilter
spanning-tree bpduguard
spanning-tree cost <1-200000000>
spanning-tree edge-port
spanning-tree link-type (auto|point-to-point|shared)
spanning-tree mst MSTMAP cost <1-200000000>
spanning-tree mst MSTMAP port-priority <0-240>
spanning-tree port-priority <0-240>
spanning-tree stp-state (enable|disable)
speed (10|100|1000)
switchport access vlan VLANID

```

Port Interface Mode (continued)

```
switchport access vlan add VLANLIST
switchport access vlan remove VLANLIST
switchport block (multicast|unicast|both)
switchport dot1q-tunnel mode (access|uplink)
switchport dot1q-tunnel mode uplink add-pvid
switchport mode private-vlan host
switchport mode private-vlan promiscuous
switchport port-security
switchport private-vlan host-association <2-4094> <2-4094>
switchport private-vlan mapping <2-4094> add VLANLIST
switchport private-vlan mapping <2-4094> remove VLANLIST
switchport trunk allowed vlan add VLANLIST
switchport trunk allowed vlan remove VLANLIST
switchport trunk native vlan VLANID
```

VLAN Interface Configuration Mode

For information about accessing VLAN Interface Configuration mode, see [VLAN Interface Configuration Mode](#) on Page 208.

```
Switch(config-if)# interface vlan1
Switch(config-if)# list
  description .LINE
  end
  exit
  ip address A.B.C.D/M
  ip dhcp client
  ip dhcp client renew
  ip igmp
  ip igmp last-member-query-count CNT
  ip igmp last-member-query-interval SECONDS
  ip igmp query-interval SECONDS
  ip igmp query-max-response-time SECONDS
  ip igmp robustness-variable CNT
  ip igmp version (1|2)
  ipv6 address X:X::X:X/M
  list
  no description
  no ip address A.B.C.D/M
  no ip dhcp client
  no ip igmp
  no ipv6 address X:X::X:X/M
  no shutdown
  quit
  shutdown
```

ModBus TCP /IP Support

This section provides the following information:

- [Modbus TCP Function Codes](#) on Page 210
- [Error Checking](#) on Page 210
- [Exception Response](#) on Page 211
- [Modbus TCP Register Table](#) on Page 211
- [CLI Commands for Modbus TCP](#) on Page 219

Overview


The ES7510-XT supports Modbus TCP communications through the CLI, which does not support Modbus ASCII or Modbus RTU. This functionality is not available on a web user interface page.

Modbus TCP is commonly used to communicate over TCP/IP networks, connecting over Port 502. Modbus TCP is used in industrial automatic communications systems and has become a standard protocol for industrial communications to transfer data to analog I/O devices or PLC systems.

Modbus TCP defines a simple protocol data unit independent of the underlying data link layer. The Modbus TCP packet includes three parts:

- MBAP header is used in the TCP/IP header to identify the Modbus application data unit. The MBAP header also includes a unit identifier to recognize and communicate between multiple independent Modbus end units.
- Function code
- Data payload

Modbus devices communicate using a master (client) /slave (server) architecture, only one device can initiate a transaction and the others respond to the master/client. The other devices (slave/server) respond by supplying the requested data to the master/client, or by taking the action requested in the query. The slave/server can be any peripheral device that processes information and sends the output data to the master using Modbus TCP protocol.

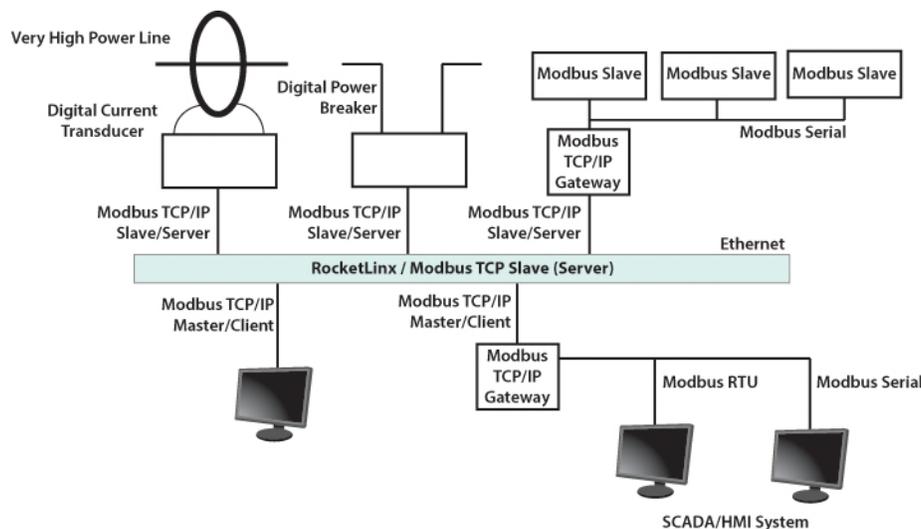

The ES7510-XT operates as slave/server device, while a typical master/client device is a host computer running appropriate application software, for example, a SCADA / HMI system. The ES7510-XT can be polled through Ethernet, thus the Modbus TCP master can read or write to the Modbus registers provided by the Modbus TCP.

The ES7510-XT firmware provides Modbus TCP registers that map to the ES7510-XT operating system information which, includes the description, IP address, power status, interface status, interface information and inbound/outbound packet statistics. With the register support, you can read the information through the Modbus TCP based progress/ display/ monitor applications and monitor the status of the switch easily.

Modbus TCP Function Codes

Modbus TCP devices use a subset of the standard Modbus TCP function codes to access device-dependent information. Modbus TCP function codes are defined in the following table.

Function Code	Name	Usage
01	Read Coils	Reads the state of a digital output.
02	Read Input Status	Reads the state of a digital input.
03	Read Holding Register	Reads the holding register in 16-bit register format.
04 (see note)	Read Input Registers	Reads data in 16-bit register format.
05	Write Coil	Writes data to force a digital output ON/OFF.
06	Write Single Register	Writes data in 16-bit register format.
15	Force Multiple Coils	Writes data to force multiple consecutive coils.

Note: The ES7510-XT supports Function Code 04, the Read Input Registers. With this support, the remote SCADA or other Modbus TCP applications can poll the information of the device and monitor the major status of the ES7510-XT.

Error Checking

The utilization of the error checking helps eliminate errors caused by noise in the communications link. In Modbus TCP mode, messages include an error-checking field that is based on a Cyclical Redundancy Check (CRC) method. The CRC field checks the contents of the entire message. It is applied regardless of any parity check method used for the individual BYTE characters of the message. The CRC value is calculated by the transmitting device, which appends the CRC to the message. The receiving device recalculates a CRC during receipt of the message, and compares the calculated value to the actual value it received in the CRC field.

Exception Response

If an error occurs, the slave sends an exception response message to master consisting of the slave address, function code, exception response code and error check field. In an exception response, the slave sets the high-order bit (MSB) of the response function code to one.

Code	Name	Descriptions
01	Illegal Function	The message function received is not an allowable action.
02	Illegal Data Address	The address referenced in the data field is not valid.
03	Illegal Data Value	The value referenced at the addressed device location is not within range.
04	Slave Device Failure	An unrecoverable error occurred while the slave was attempting to perform the requested action.
05	Acknowledge	The slave has accepted the request and processing it, but a long duration of time is required to do so.
06	Slave Device Busy	The slave is engaged in processing a long-duration program command.
07	Negative Acknowledge	The slave cannot perform the program function received in the query.
08	Memory Parity Error	The slave attempted to read extended memory, but detected a parity error in the memory.

Modbus TCP Register Table

The latest firmware provides the initial release of the Modbus TCP/IP client service support for factory automation applications. You can implement the modbus command using the command line interface in console and Telnet modes, which allows you to modify some parameters such as, idle time, number of Modbus masters, and the Modbus service port.

Note: The Modbus TCP client returns 0xFFFF to a Modbus master when pulling a reserved address.

Word Address	Data Type	Description
System Information		
0x0000	16 words	Vender Name = "Comtrol" Word 0 Hi byte = 'C' Word 0 Lo byte = 'o' Word 1 Hi byte = 'm' Word 1 Lo byte = 't' Word 2 Hi byte = 'r' Word 2 Lo byte = 'o' Word 3 Hi byte = 'l' Word 3 Lo byte = '\0' (other words = 0)

Word Address	Data Type	Description
System Information (cont.)		
0x0010	16 words	Product Name = "ES7510-XT" Word 0 Hi byte = 'E' Word 0 Lo byte = 'S' Word 1 Hi byte = '7' Word 1 Lo byte = '5' Word 2 Hi byte = '1' Word 2 Lo byte = '0' Word 3 Hi byte = '.' Word 3 Lo byte = 'X' Word 4 Hi byte = 'T' Word 4 Lo byte = '\0' (other words = 0)

Word Address	Data Type	Description
System Information (cont.)		
0x0020	128 words	SNMP system name (string)
0x00A0	128 words	SNMP system location (string)
0x0120	128 words	SNMP system contact (string)
0x01A0	32 words	SNMP system OID (string)
0x01C0	2 words	System uptime (unsigned long)
0x01C2 to 0x01FF	60 words	Reserved address space
0x0200	2 words	Hardware version
0x0202	2 words	S/N information
0x0204	2 words	CPLD version
0x0206	2 words	Bootloader version
0x0208	2 words	Firmware Version Word 0 Hi byte = major Word 0 Lo byte = minor Word 1 Hi byte = reserved Word 1 Lo byte = reserved

Word Address	Data Type	Description
System Information (cont.)		
0x020A	2 words	Firmware Release Date Firmware was released on 2010-08-11 at 09 o'clock Word 0 = 0x0B09 Word 1 = 0x0A08
0x020C	3 words	Ethernet MAC Address For example: MAC = 01-02-03-04-05-06 Word 0 Hi byte = 0x01 Word 0 Lo byte = 0x02 Word 1 Hi byte = 0x03 Word 1 Lo byte = 0x04 Word 2 Hi byte = 0x05 Word 2 Lo byte = 0x06
0x0300	2 words	IP address For example: IP = 192.168.250.250 Word 0 Hi byte = 0xC0 Word 0 Lo byte = 0xA8 Word 1 Hi byte = 0x0A Word 1 Lo byte = 0x01
0x020F to 0x2FF	241 words	Reserved address space
0x0302	2 words	Subnet Mask
0x0304	2 words	Default Gateway
0x0306	2 words	DNS Server
0x0308 to 0x3FF	248 words	Reserved address space (IPv6 or others)
0x0400	1 word	AC1 0x0000:Off 0x0001:On 0xFFFF: unavailable
0x0401	1 word	AC2 0x0000:Off 0x0001:On 0xFFFF: unavailable
0x0402	1 word	DC1 0x0000:Off 0x0001:On 0xFFFF: unavailable
0x0403	1 word	DC2 0x0000:Off 0x0001:On 0xFFFF: unavailable
0x0404 to 0x040F	12 words	Reserved address space

Word Address	Data Type	Description
System Information (cont.)		
0x0410	1 word	DI1 0x0000:Off 0x0001:On 0xFFFF: unavailable
0x0411	1 word	DI2 0x0000:Off 0x0001:On 0xFFFF: unavailable
0x0412	1 word	DO1 0x0000:Off 0x0001:On 0xFFFF: unavailable
0x0413	1 word	DO2 0x0000:Off 0x0001:On 0xFFFF: unavailable
0x0414 to 0x041F	12 words	Reserved address space
0x0420	1 word	RDY 0x0000:Off 0x0001:On
0x0421	1 word	RM 0x0000:Off 0x0001:On
0x0422	1 word	RF 0x0000:Off 0x0001:On
0x0423	1 word	RS

Word Address	Data Type	Description
Port Information (32 Ports)		
0x1000 to 0x11FF	16 words	Port Description
0x1200 to 0x121F	1 word	Administrative Status 0x0000: disable 0x0001: enable
0x1220 to 0x123F	1 word	Operating Status 0x0000: disable 0x0001: enable 0xFFFF: unavailable
0x1240 to 0x125F	1 word	Duplex 0x0000: half 0x0001: full 0x0003: auto (half) 0x0004: auto (full) 0x0005: auto 0xFFFF: unavailable
0x1260 to 0x127F	1 word	Speed 0x0001: 10 0x0002: 100 0x0003: 1000 0x0004: 2500 0x0005: 10000 0x0101: auto 10 0x0102: auto 100 0x0103: auto 1000 0x0104: auto 2500 0x0105: auto 10000 0x0100: auto 0xFFFF: unavailable
0x1280 to 0x129F	1 word	Flow Control 0x0000: off 0x0001: on 0xFFFF: unavailable
0x12A0 to 0x12BF	1 word	Default Port VLAN ID 0x0001-0xFFFF
0x12C0 to 0x12DF	1 word	Ingress Filtering 0x0000: disable 0x0001: enable

Word Address	Data Type	Description
Port Information (32 Ports - cont.)		
0x12E0 to 0x12FF	1 word	Acceptable Frame Type 0x0000: all 0x0001: tagged frame only
0x1300 to 0x131F	1 word	Port Security 0x0000: disable 0x0001: enable
0x1320 to 0x133F	1 word	Auto Negotiation 0x0000: disable 0x0001: enable 0xFFFF: unavailable
0x1340 to 0x135F	1 word	Loopback Mode 0x0000: none 0x0001: MAC 0x0002: PHY 0xFFFF: unavailable
0x1360 to 0x137F	1 word	STP Status 0x0000: disabled 0x0001: blocking 0x0002: listening 0x0003: learning 0x0004: forwarding
0x1380 to 0x139F	1 word	Default CoS Value for untagged packets
0x13A0 to 0x13BF	1 word	MDIX 0x0000: disable 0x0001: enable 0x0002: auto 0xFFFF: unavailable
0x13C0 to 0x13DF	1 word	Medium mode 0x0000: copper 0x0001: fiber 0x0002: none 0xFFFF: unavailable
0x13E0 to 0x14FF	288 words	Reserved address space
SFP Information (32 Ports)		
0x1500 to 0x151F	1 word	SFP Type
0x1520 to 0x153F	1 words	Wave length
0x1540 to 0x157F	2 words	Distance
0x1580 to 0x167F	8 words	Vender

Word Address	Data Type	Description
SFP DDM Information (32 Ports)		
0x1800 to 0x181F	1 words	Temperature
0x1820 to 0x185F	2 words	Alarm Temperature
0x1860 to 0x187F	1 words	Tx power
0x1880 to 0x18BF	2 words	Warning Tx power
0x18C0 to 0x18DF	1 words	Rx power
0x18E0 to 0x191F	2 words	Warning Rx power
0x1920 to 0x1FFF	1760 words	Reserved address space
Inbound Packet Information		
0x2000 to 0x203F	2 words	Good Octets
0x2040 to 0x207F	2 words	Bad Octets
0x2080 to 0x20BF	2 words	Unicast
0x20C0 to 0x20FF	2 words	Broadcast
0x2100 to 0x213F	2 words	Multicast
0x2140 to 0x217F	2 words	Pause
0x2180 to 0x21BF	2 words	Undersize
0x21C0 to 0x21FF	2 words	Fragments
0x2200 to 0x223F	2 words	Oversize
0x2240 to 0x227F	2 words	Jabbers
0x2280 to 0x22BF	2 words	Discards
0x22C0 to 0x22FF	2 words	Filtered frames
0x2300 to 0x233F	2 words	RxError
0x2340 to 0x237F	2 words	FCSError
0x2380 to 0x23BF	2 words	Collisions
0x23C0 to 0x23FF	2 words	Dropped Frames
0x2400 to 0x243F	2 words	Last Activated SysUpTime
0x2440 to 0x24FF	191 words	Reserved address space
Outbound Packet Information		
0x2500 to 0x253F	2 words	Good Octets
0x2540 to 0x257F	2 words	Unicast
0x2580 to 0x25BF	2 words	Broadcast
0x25C0 to 0x25FF	2 words	Multicast
0x2600 to 0x263F	2 words	Pause
0x2640 to 0x267F	2 words	Deferred
0x2680 to 0x26BF	2 words	Collisions
0x26C0 to 0x26FF	2 words	SingleCollision
0x2700 to 0x273F	2 words	MultipleCollision
0x2740 to 0x277F	2 words	ExcessiveCollision
0x2780 to 0x27BF	2 words	LateCollision
0x27C0 to 0x27FF	2 words	Filtered
0x2800 to 0x283F	2 words	FCSError
0x2840 to 0x29FF	447 words	Reserved address space

Word Address	Data Type	Description
Number of Frames Received and Transmitted with a Length (Octets)		
0x2A00 to 0x2A3F	2 words	64
0x2A40 to 0x2A7F	2 words	65 to 127
0x2A80 to 0x2ABF	2 words	128 to 255
0x2AC0 to 0x2AFF	2 words	256 to 511
0x2B00 to 0x2B3F	2 words	512 to 1023
0x2B40 to 0x2B7F	2 words	1024 to maximum size

CLI Commands for Modbus TCP

The CLI commands for Modbus TCP are listed in the following table.

Modbus TCP Commands	
Enable	Switch(config)# modbus enable
Disable	Switch(config)# modbus disable
Set Modbus Interval Time between Request	Switch(config)# modbus idle-timeout <200-10000> Timeout value: 200-10000ms Switch(config)# modbus idle-timeout 200
Set Modbus TCP Master Communicate Session	Switch(config)# modbus master <1-20> Max Modbus TCP Master Switch(config)# modbus master 2
Set Modbus TCP Listening Port	Switch(config)# modbus port <1-65536> Port Number Switch(config)# modbus port 502

Technical Support

Control Private MIB

Control supports many standard MIBs for users to configure or monitor the switch configuration by SNMP. However, since some commands can't be found in standard MIBs, Control provides a Private MIB file. Compile the private MIB file with your SNMP tool. The private MIB can be downloaded it from the [Control download Site](#).

The Private MIB tree is the same as the web tree. This is easier to understand and use. If you are not familiar with a standard MIB, you can directly use the private MIB to manage /monitor the switch, without the need to learn or find where the OIDs of the commands are.

Control Support

You can use one of the following methods to contact Control.

Contact Method	Web Address or Phone Number
Downloads	http://downloads.comtrol.com
Support	http://www.comtrol.com/support
Downloads	ftp://ftp.comtrol.com/html/ES7510_XT_main.htm
Web Site	http://www.comtrol.com
Phone	763.957.6000

